

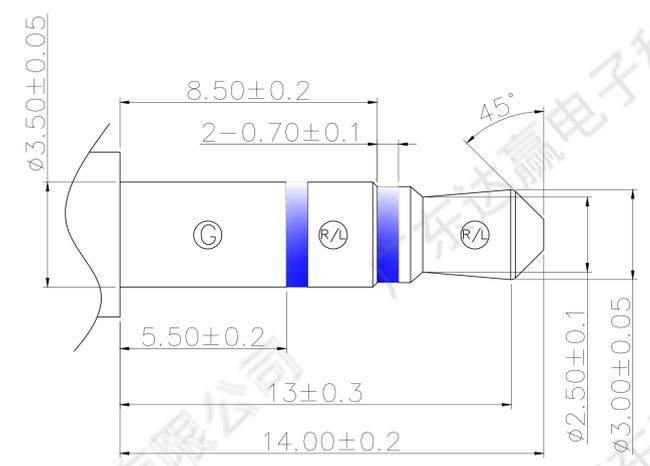
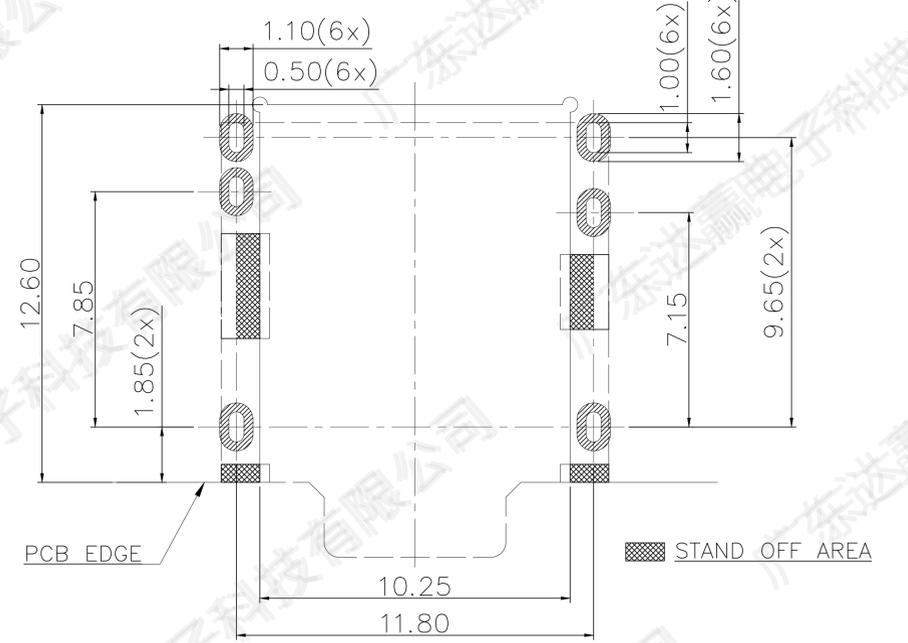






Halgen Free Compliant

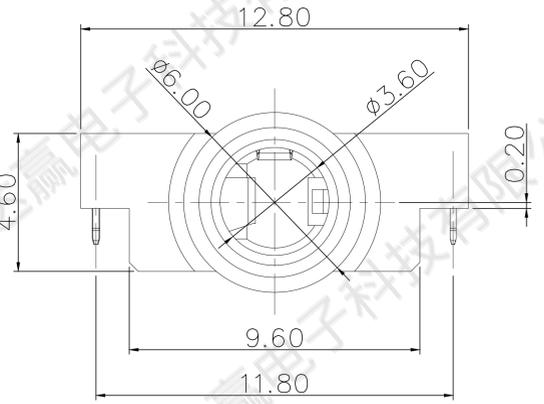

Matching Plug


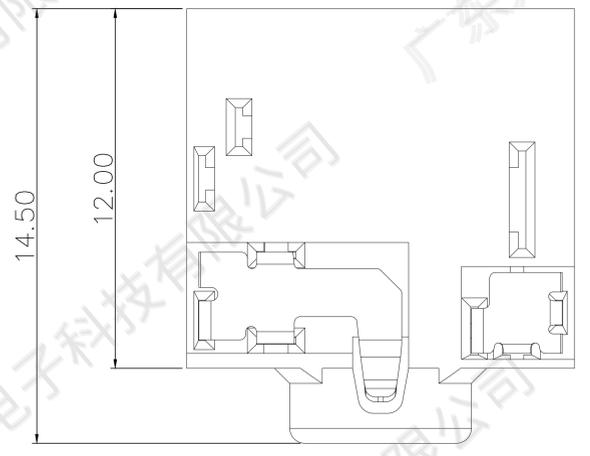


RECOMMENDED P.C.B LAYOUT T=1.20
TOP VIEW (TOLRANCE:±0.05)

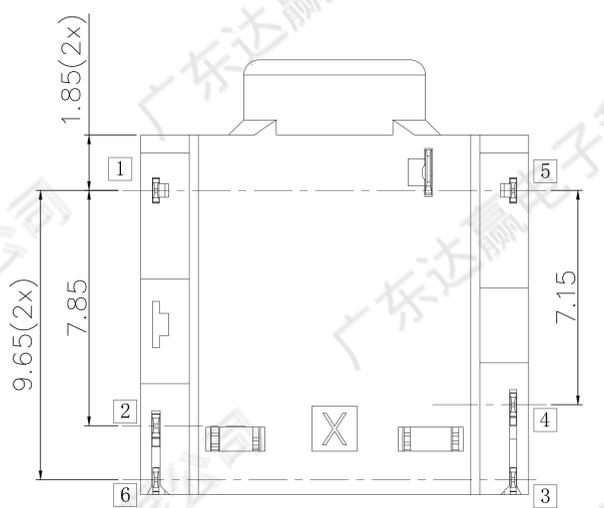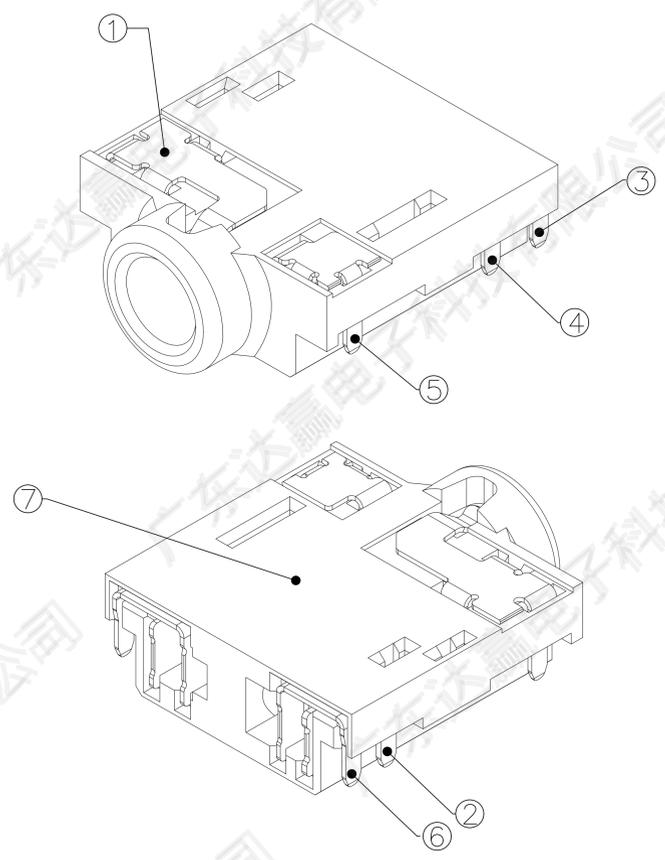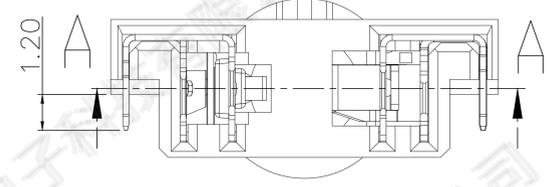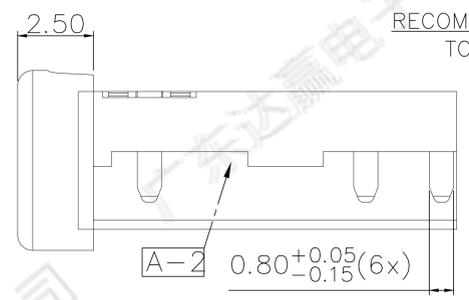

SPECIFICATION:

1. Electrical Characteristics
 - 1-1. Voltage Rating: DC 30V;
 - 1-2. Current Rating: DC 0.3A Max.;
 - 1-3. Contact Resistance: 30mΩ Max.;
 - 1-4. Insulation Resistance: 100MΩ Min. At 500V DC;
 - 1-5. Withstanding Voltage: 500V AC For 1 Minute;
2. Mechanical Characteristics
 - 2-1. Life Test: 5000 Cycles Min,
 - 2-2. Mating/Unmating Force: 3~30N;
3. Salt Spray Test Time: 48 Hours Min.

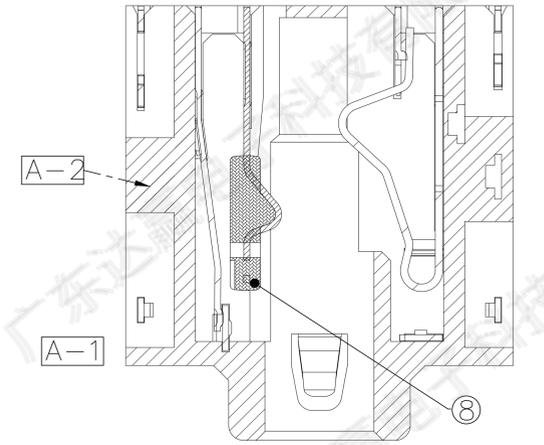

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
⑧	Insulator		HIGHT TEMPERATURE PLASTIC	Black,UL94 V-0
⑦	Housing		HIGHT TEMPERATURE PLASTIC	Black,UL94 V-0
⑥	Shunt terminal	⑥ 1	Phosphor Bronze,t0.20	Gold Flash Plated
⑤	Shunt terminal	⑤ 1	Phosphor Bronze,t0.20	Gold Flash On The Contact Area,
④	Transfer Spring	④ 1	Phosphor Bronze,t0.20	
③	Ring Spring	③ 1	Phosphor Bronze,t0.20	Matte-TIN Plating 80u"Min. on Solder Tail Area
②	Tip Spring	② 1	Phosphor Bronze,t0.25	
①	Earth Spring	① 1	Phosphor Bronze,t0.20	Nickel 50u"Min. Under Plating All Over

ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	SCALE:	UNIT:	SHEET:
	A-2	17' /03/08	A-2:减少两槽位深度,外观会随之修改	Andy	李海鸥	Angle ±2° 10<L≤20 ±0.3	DESIGN	mm	1 of 1
	A-1	14' /03/17	A-1:设计变更MOLDING塑胶结构及锡脚公差;	喻荣华	余军	5<L≤10 ±0.25	CHECK		
	A-0	13' /05/05	NEW	喻荣华	余军	L≤5 ±0.20	APPROVAL		

广东达赢电子科技有限公司
 Guangdong DaYing Electronic Technology Co., Ltd.

TITLE: ø3.50mm Phone Jack(6PIN,CL=0.20mm)
 MODEL NO. PJ-D3229A-ABK7AM02L-RH
 FILE NO. /