
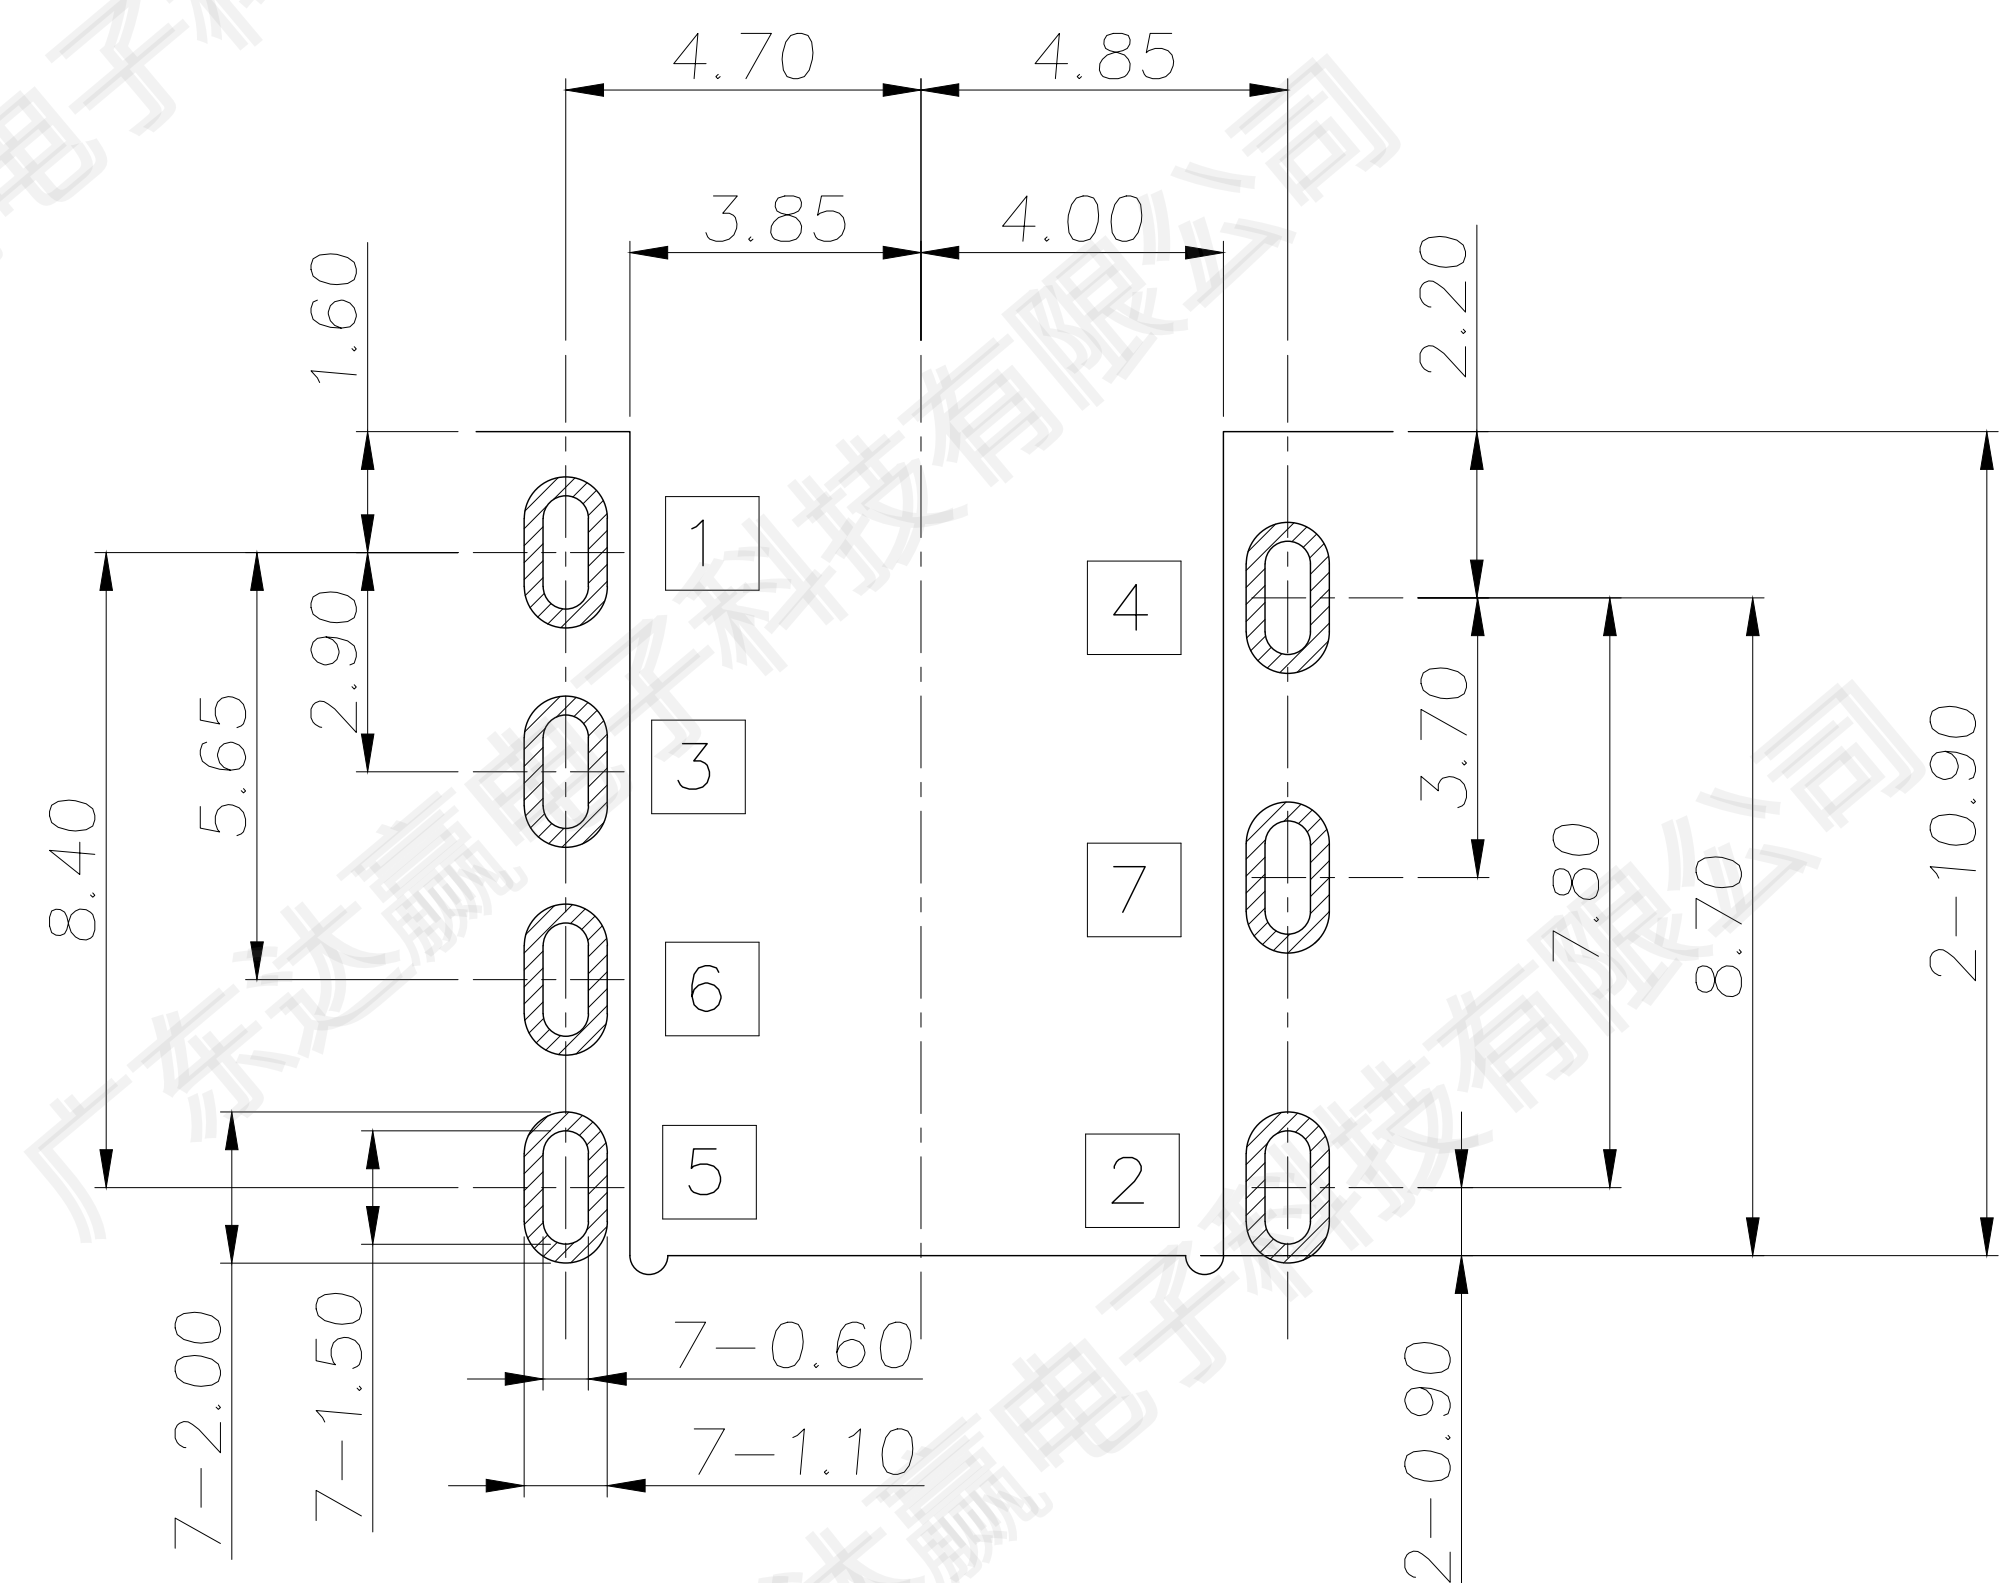
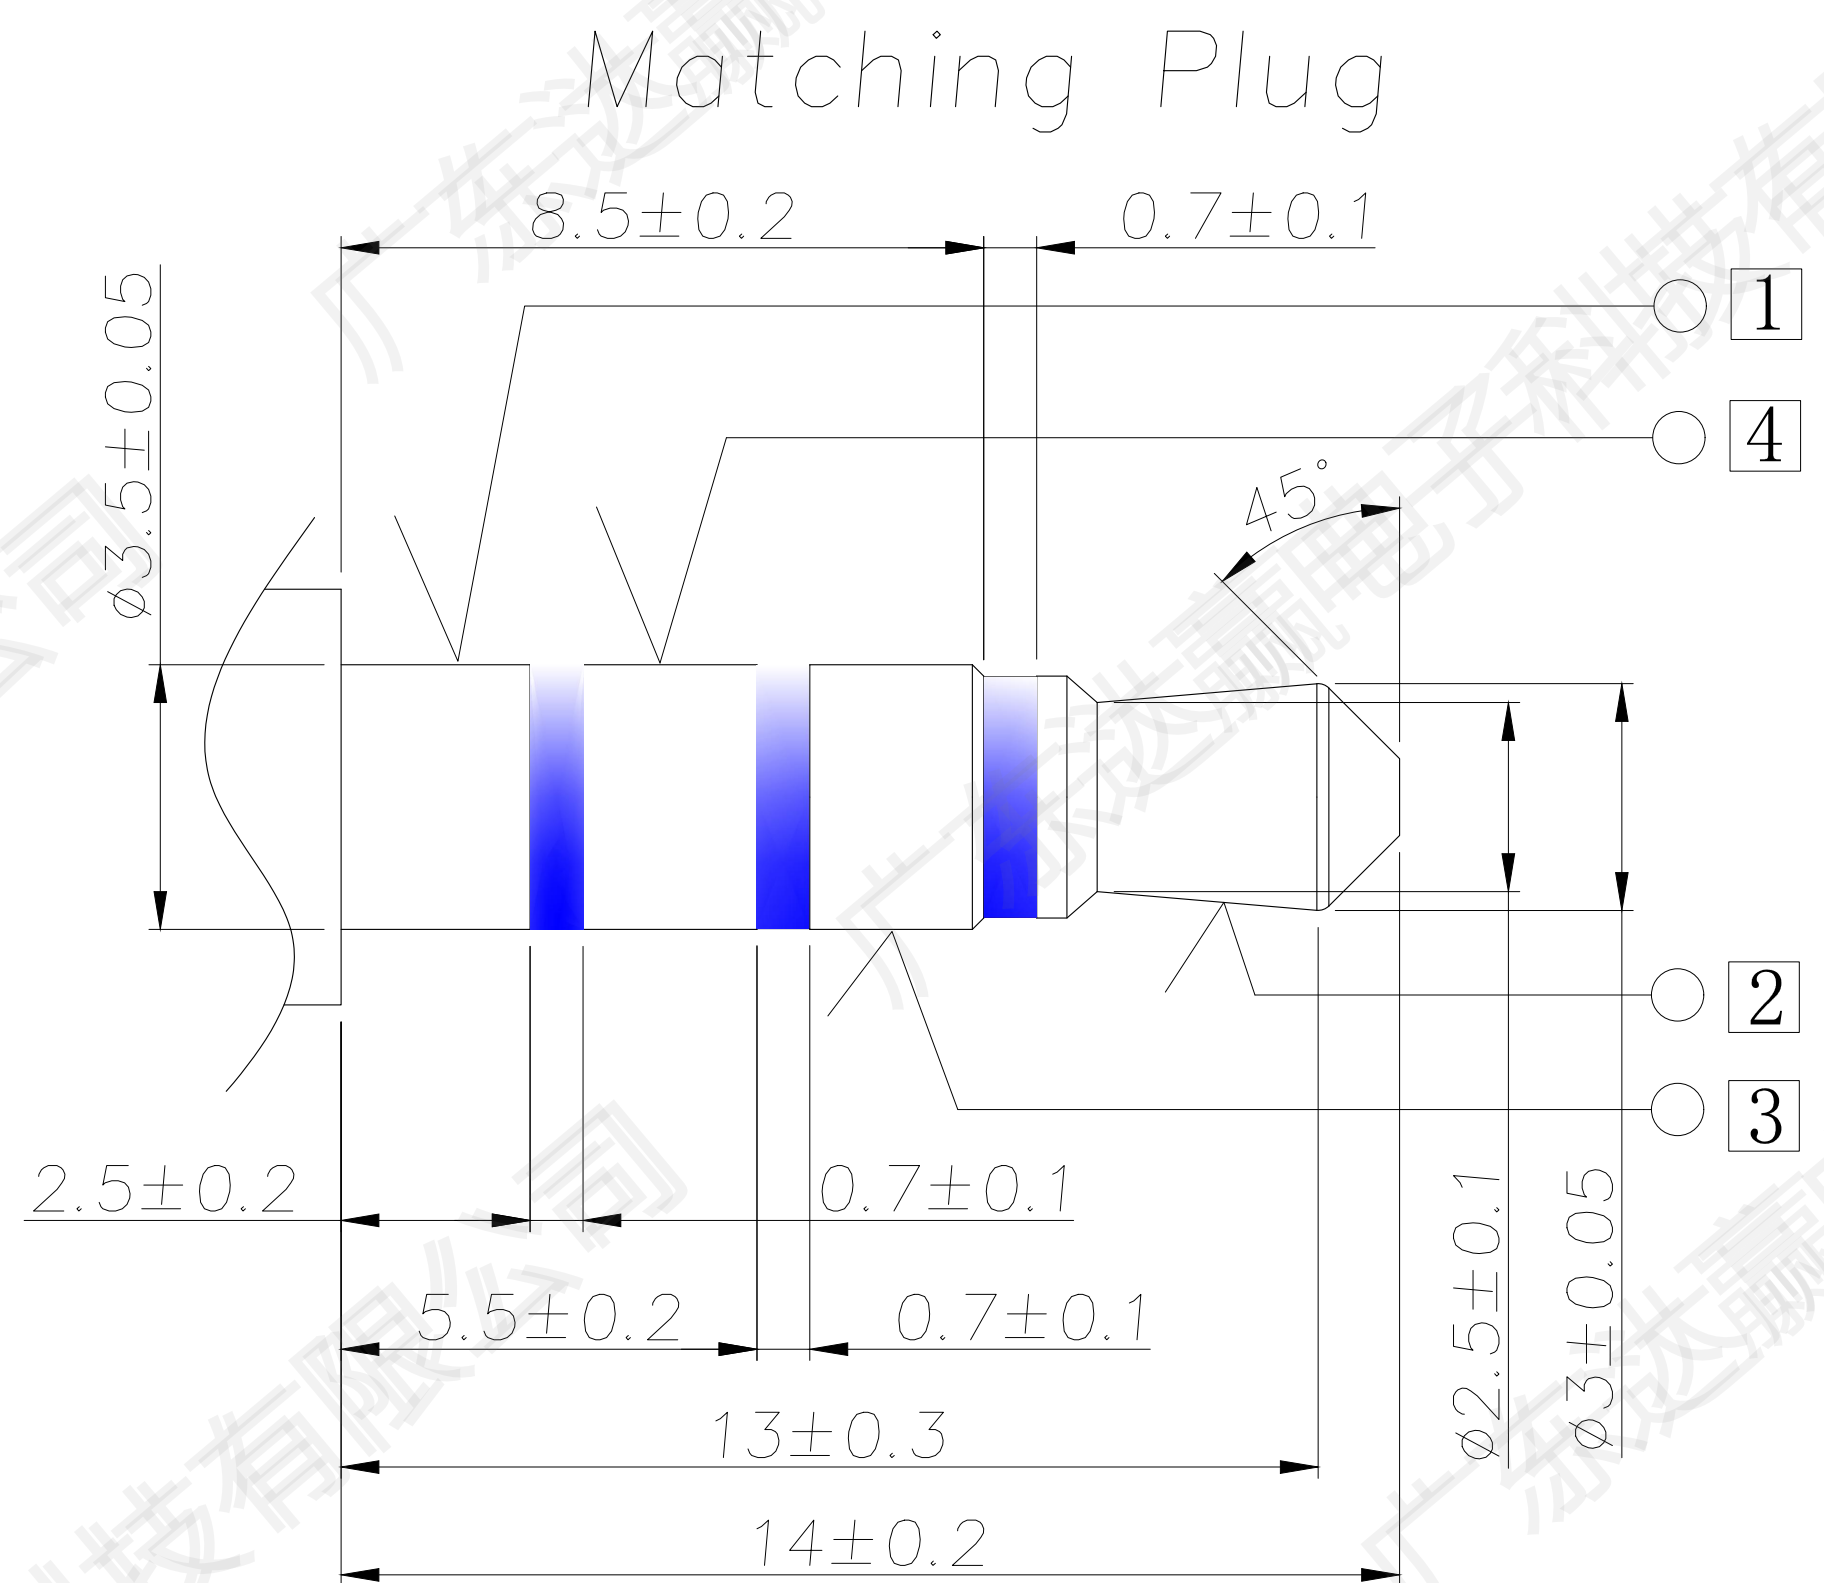
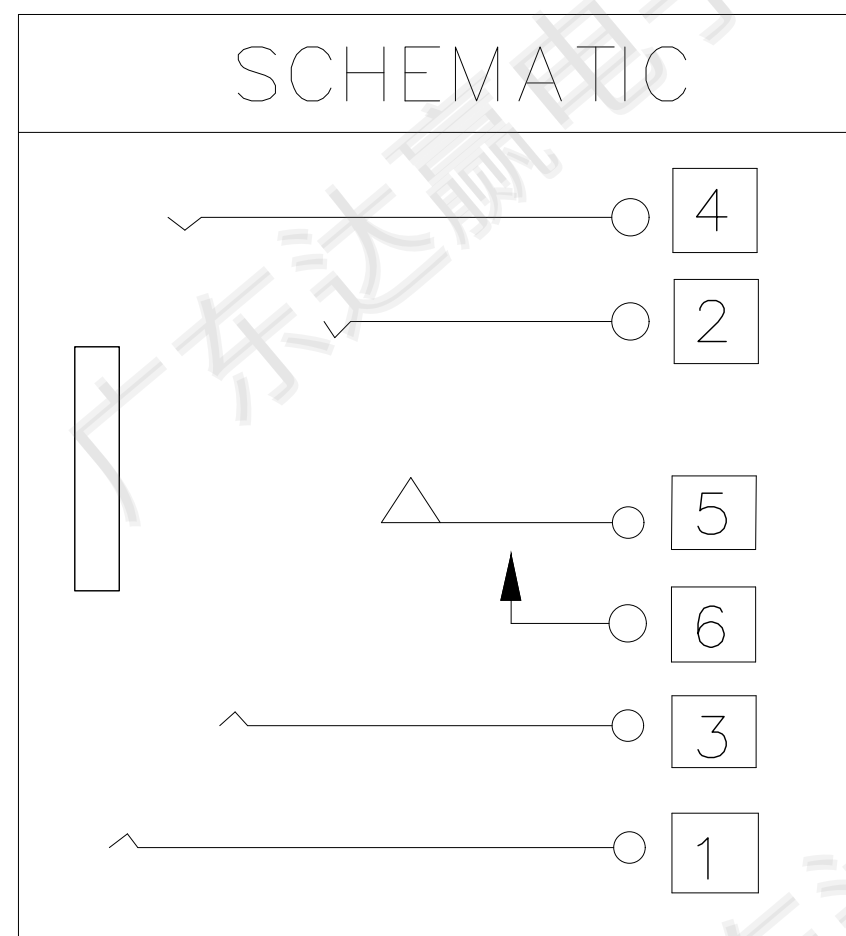
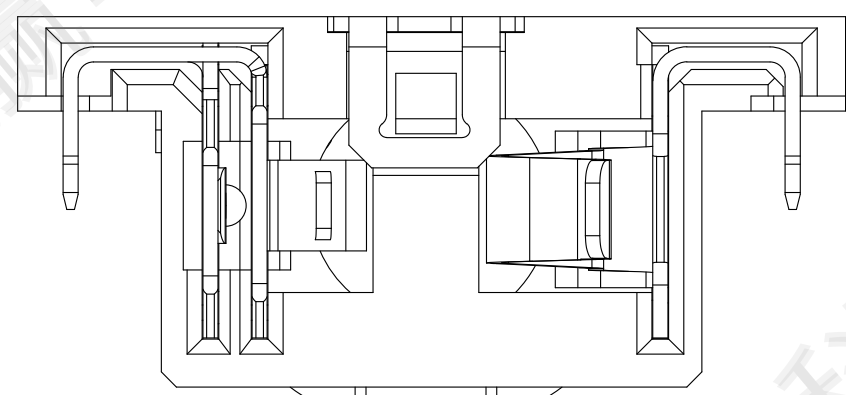
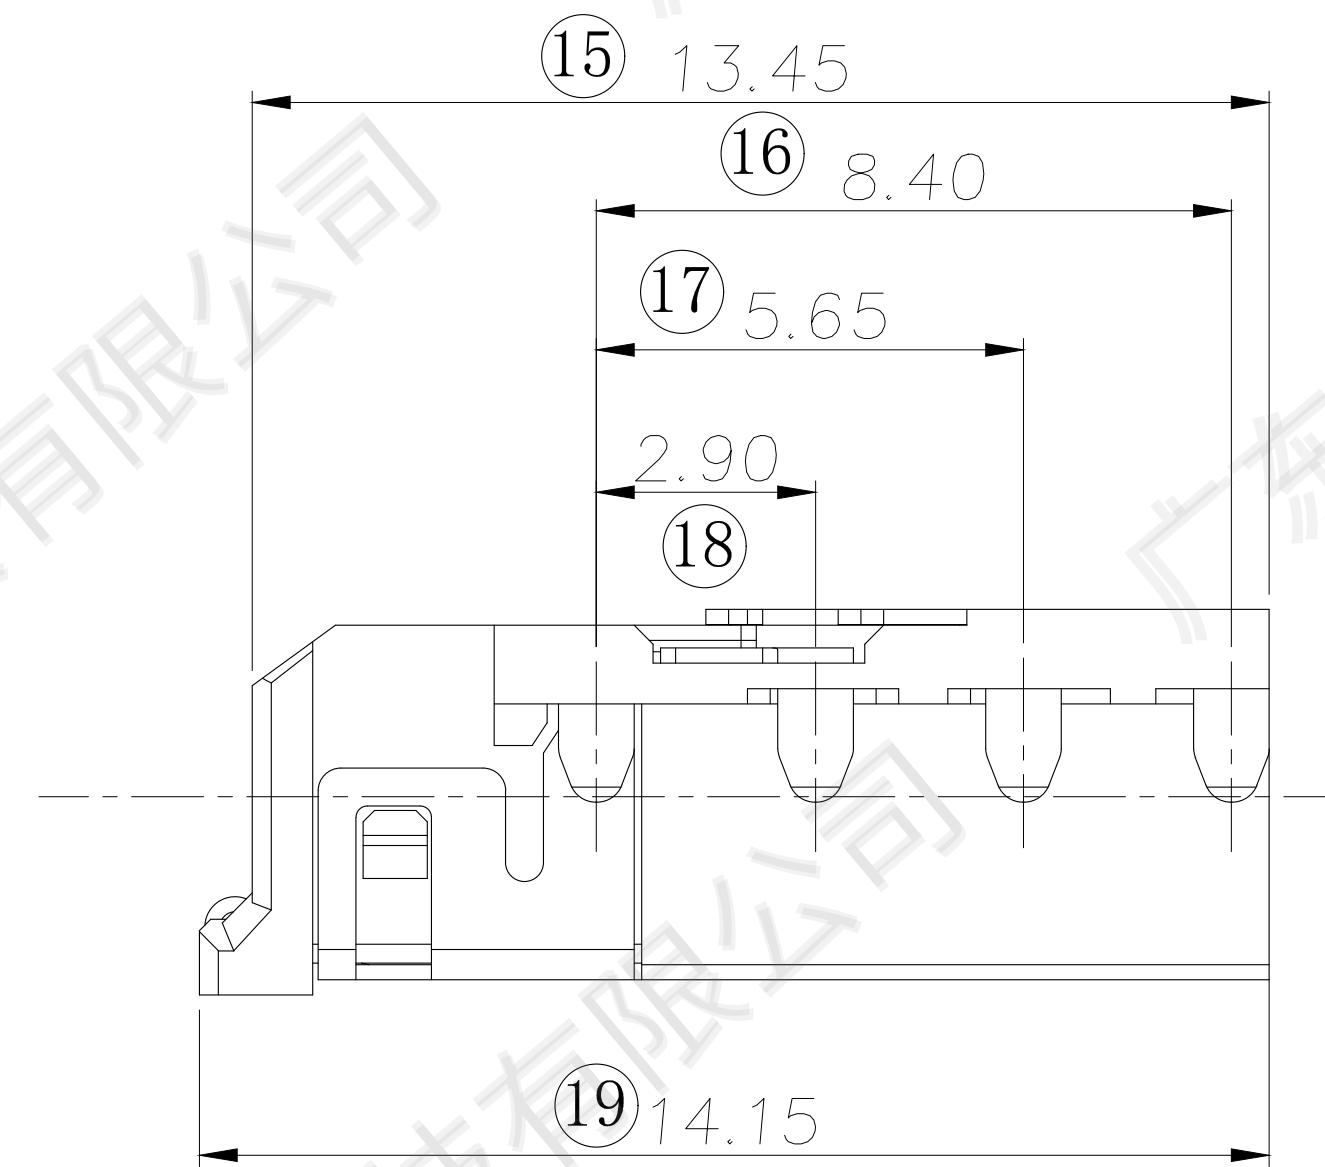
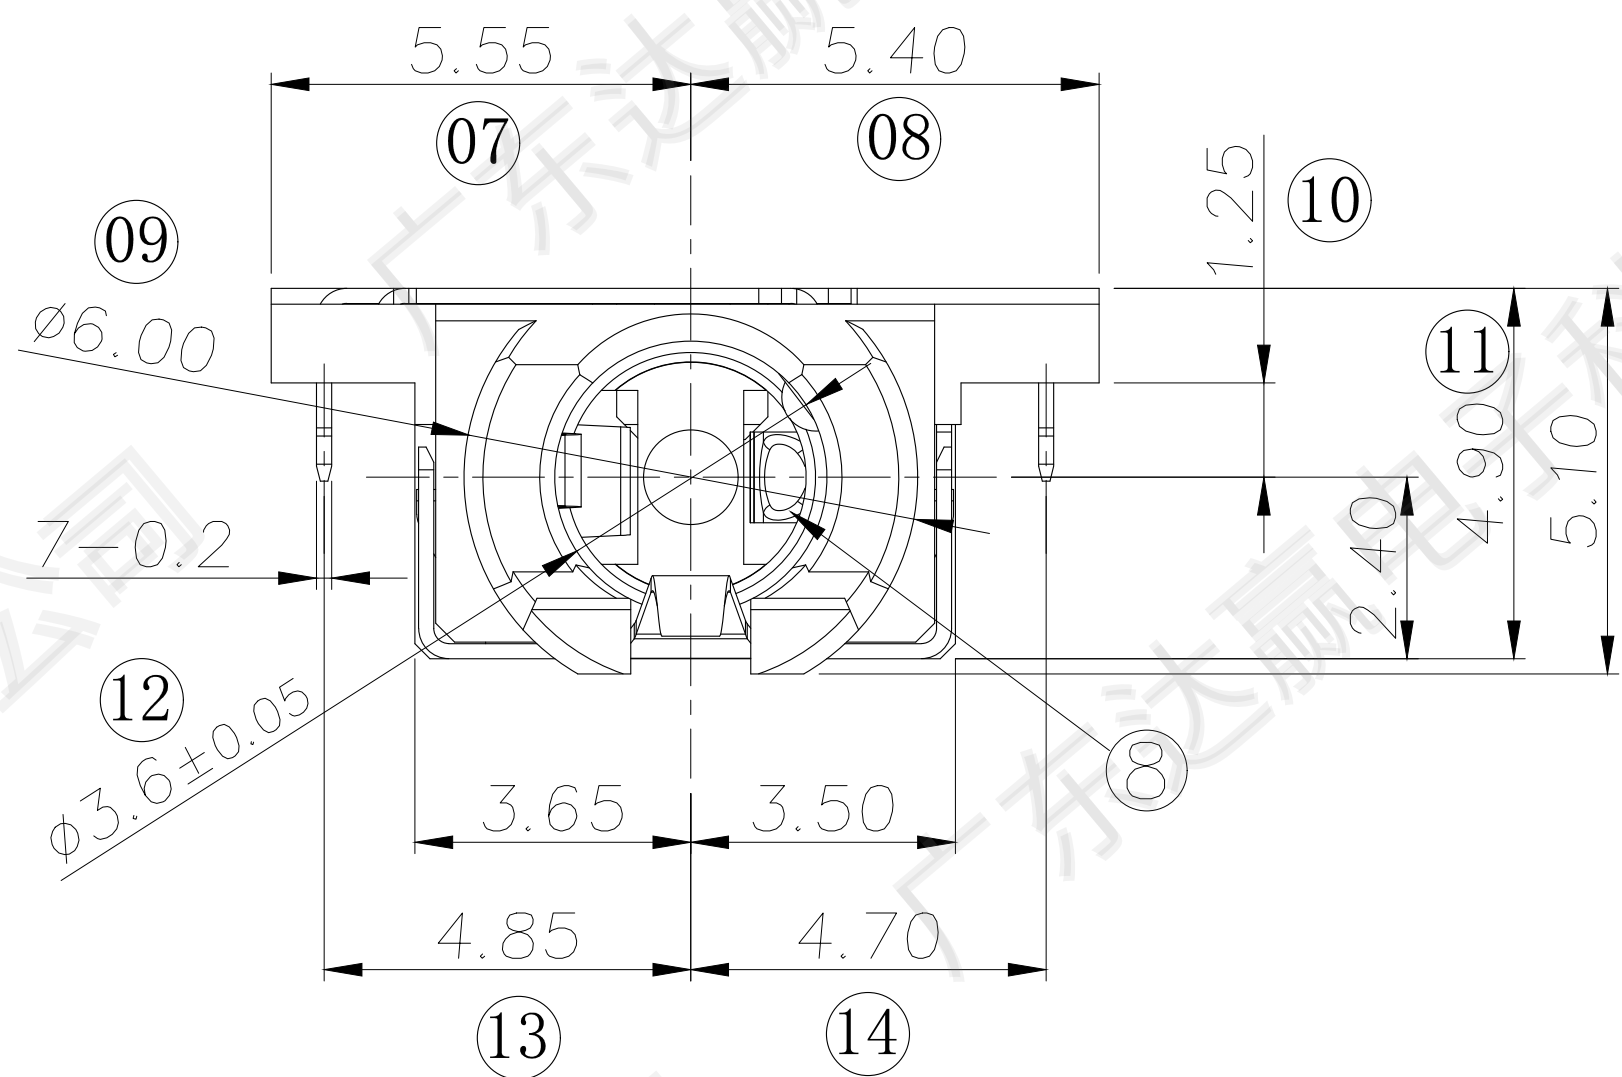
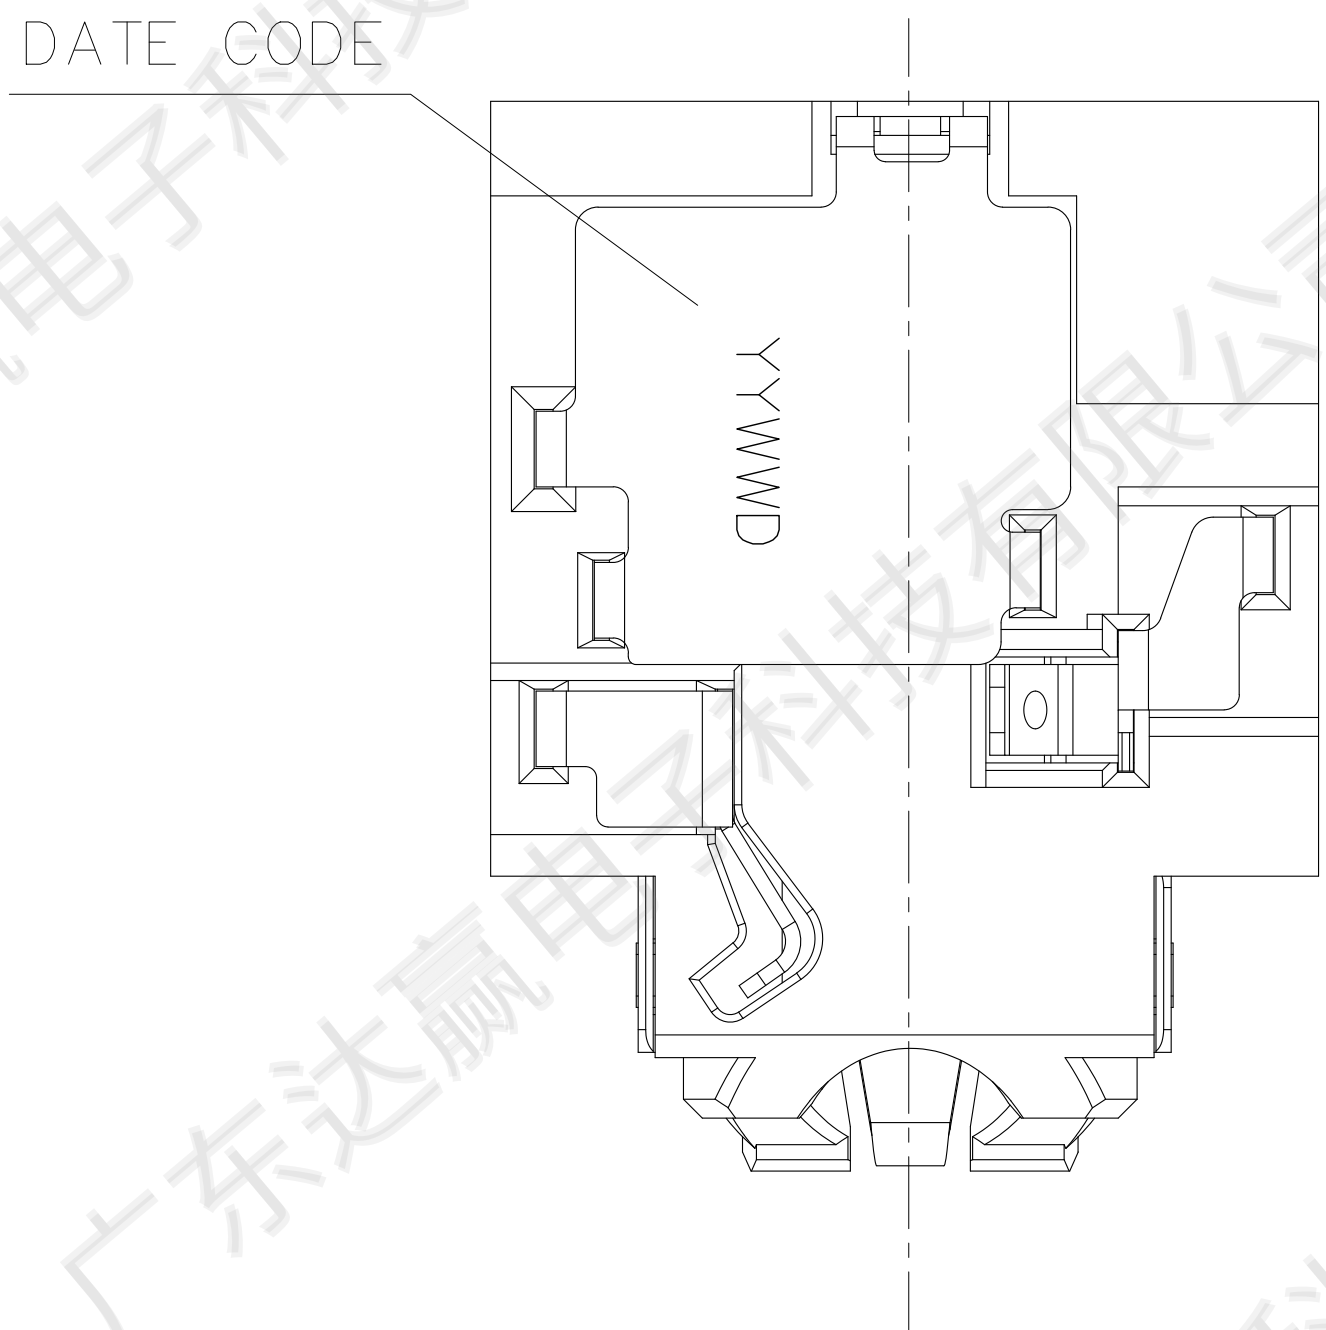


MODEL NO. :
PJ-D3158A-ABK7AS0*L-RH
(1) (2)(3) (4)(5)(6)


- (1) Series no.
(2) Schematic type: A
(3) Housing color:
BK7=Black
(4) Terminal plating:
AS02=Gold Flash
AS03=Gold 3u"
AS05=Gold 15u"
AS06=Gold 30u"
(5) Packing mode:L=Reel packing
(6) Environmental requirements:
RH=RoHS 2.0 + Halogen Free

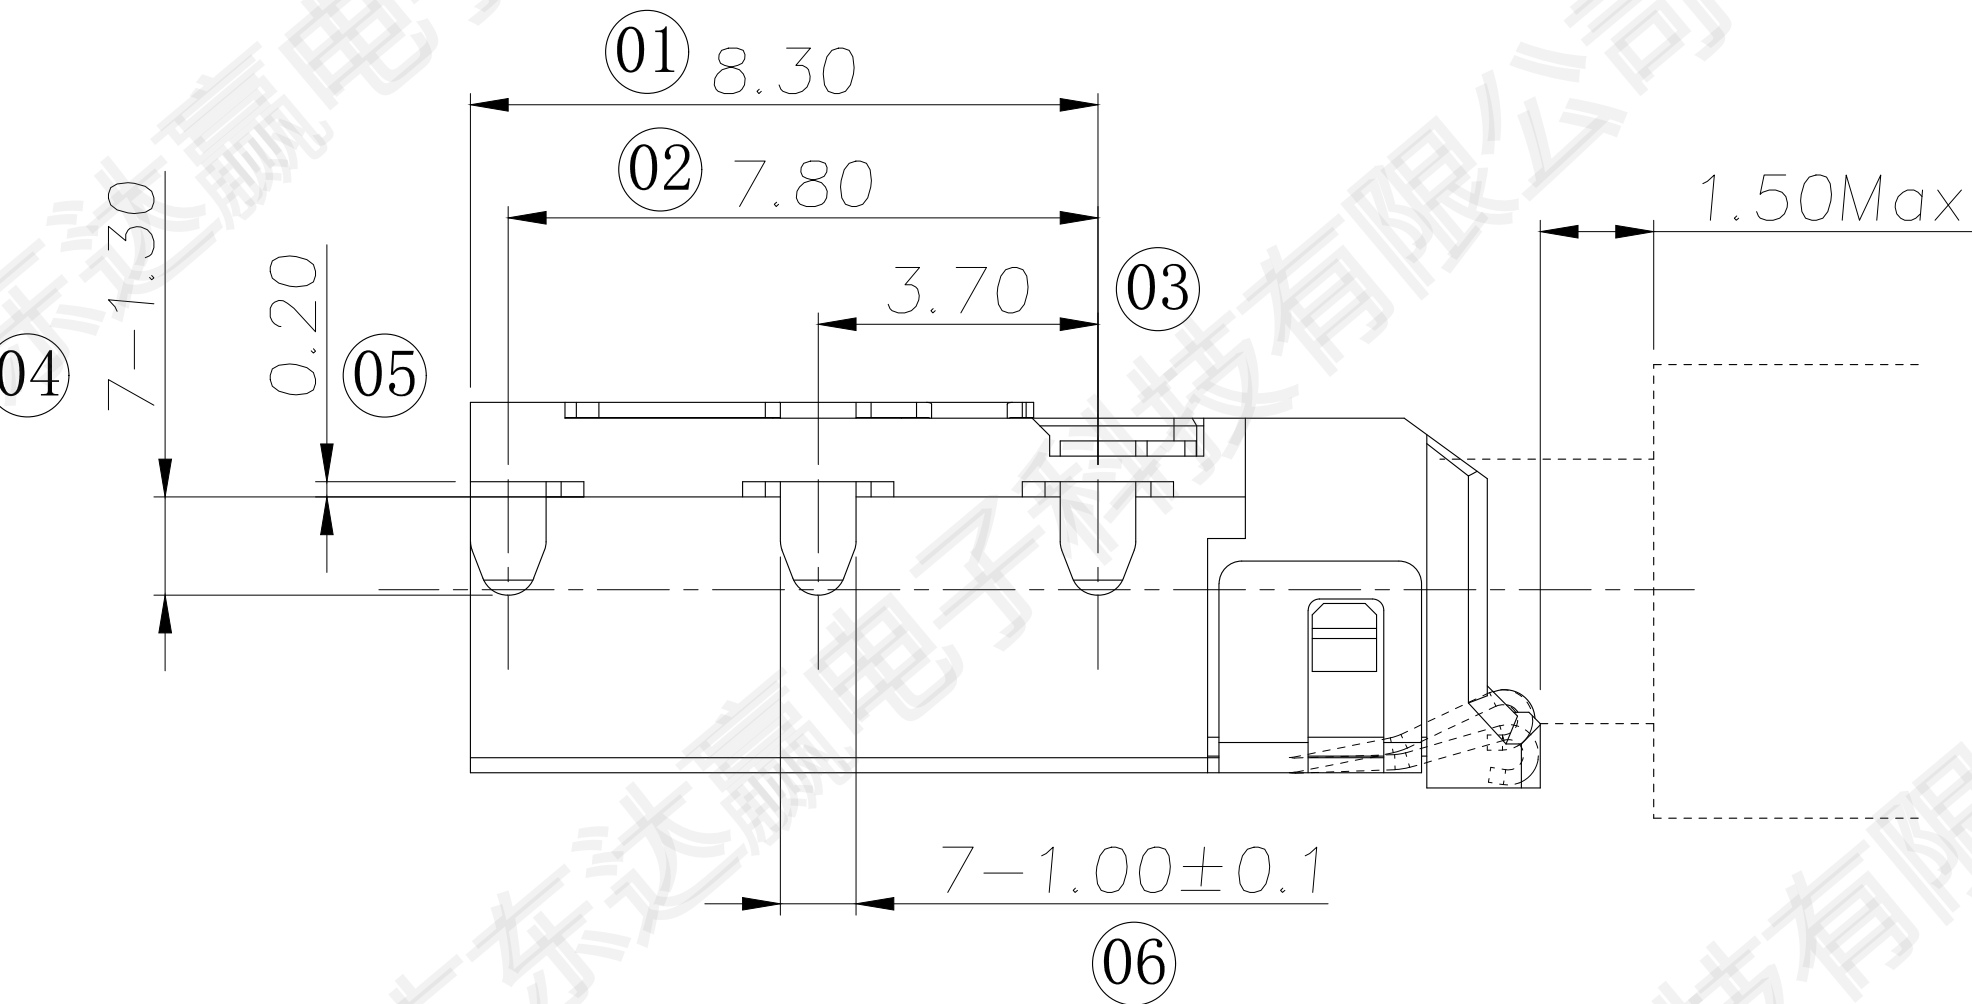

RECOMMENDED P.C.B LAYOUT (t=1.0mm)
TOP VIEW (TOLRANCE: ±0.05)

SPECIFICATION:

1. Electrical characteristics
1-1. Current rating: DC 0.5A max.
1-2. Voltage rating: DC 30V.
1-3. Contact resistance: 50mΩ max.
1-4. Insulation resistance: 100MΩ min. at 500V DC.
1-5. Withstanding voltage: 500V AC for 1 minute.
2. Mechanical characteristics
2-1. Life test: 5000 cycles min.
2-2. Mating force: 3~30N,
Unmating force: 3~30N.

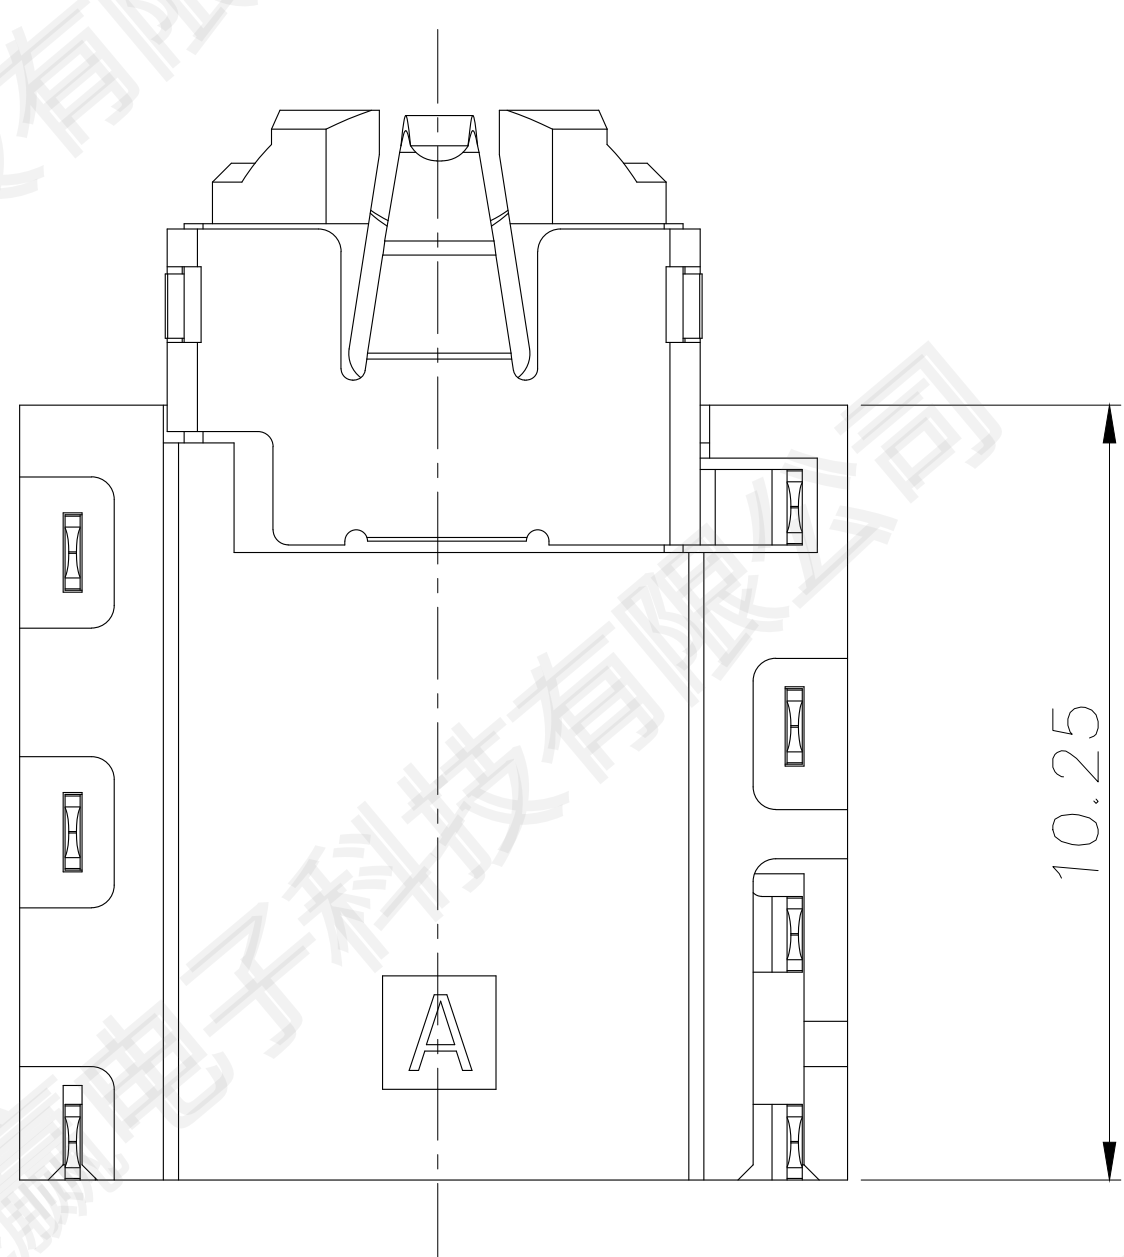

						Angle	±2°	DESIGN	罗振强	2020. 11. 16
						. x	±0.35	CHECK		
						. xx	±0.25	APPROVAL		
	A-0	2020. 11. 16	NEW	罗振强	刘 伟	. xxx	±0.15	SCALE: 1:1	UNIT:mm	A4
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED				

9	Housing	1	PA10T R630NH UL94 V-0	Black
8	Insulator	1	PA10T R630NH UL94 V-0	Black
7	Shell	1	C5210-EH, 0.20t	Nickel Plating
6	Shunt terminal	1	C5210-EH, 0.20t	Gold Flash On Contact And Solder Tail Area, Nickel 50u" UnderPlated
5	Transfer Spring	1	C5210-EH, 0.20t	Gold(See Table) On Contact Area,
4	Ring spring	1	C5210-EH, 0.20t	Matte Tin 80u"
3	Ring spring	1	C5210-EH, 0.20t	Plating on Solder Tail Area
2	Tip spring	1	C5210-EH, 0.20t	, All over 50u"
1	Earth spring	1	C5210-EH, 0.20t	Nickel
NO.	DESCRIPTION	QTY	MATERIAL	REMARK



广东达赢电子科技有限公司
Guangdong DaYing Electronic Technology Co., Ltd.

CUSTOMER DRAWING	TITLE:	Ø3.5mm PHONE JACK
	MODEL NO.	PJ-D3158A-ABK7AS0*L-RH
	FILE NO.	Q/DY. QW-001A-0725