
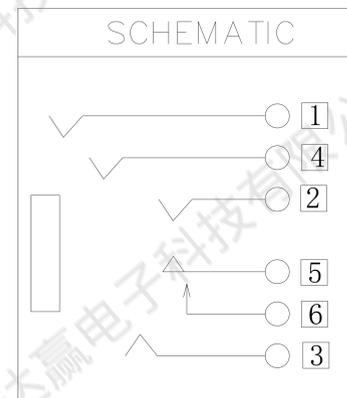
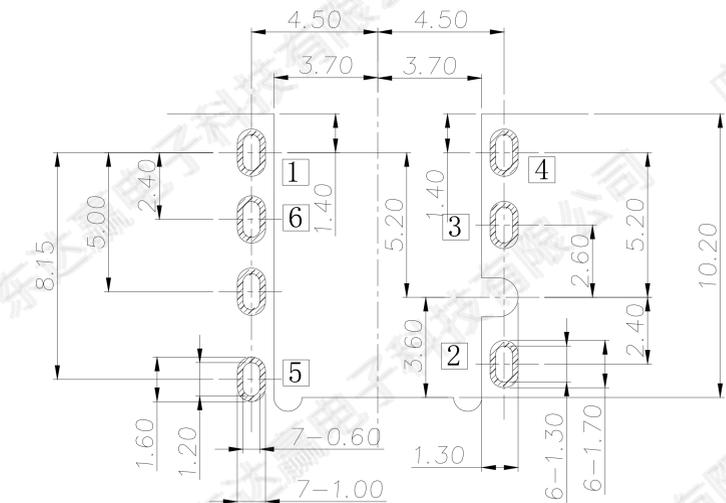
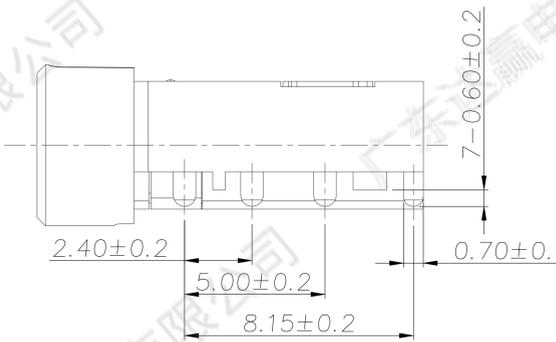
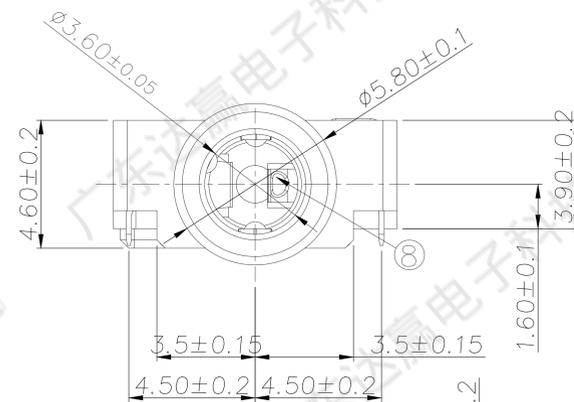
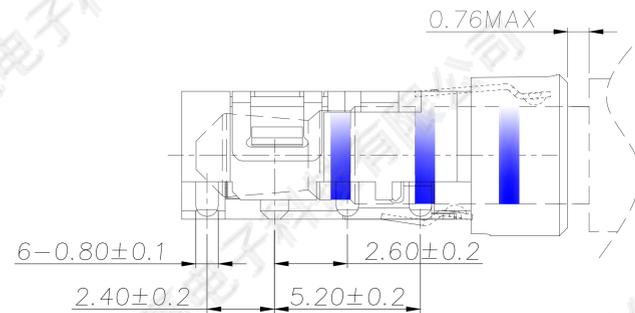
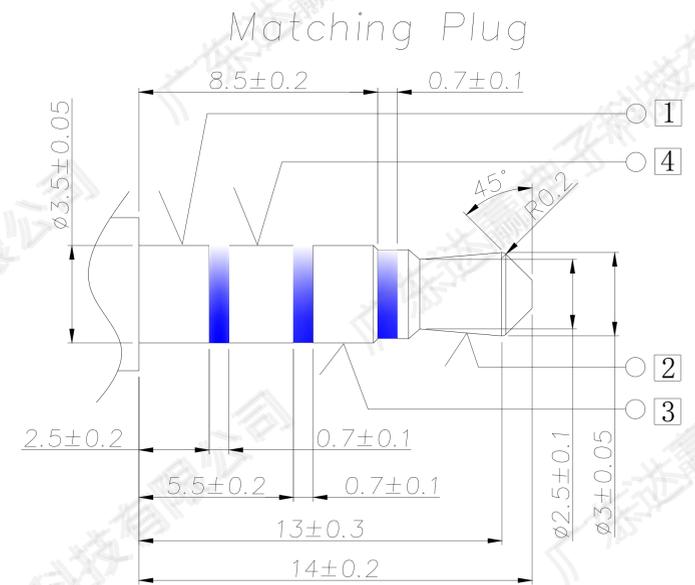
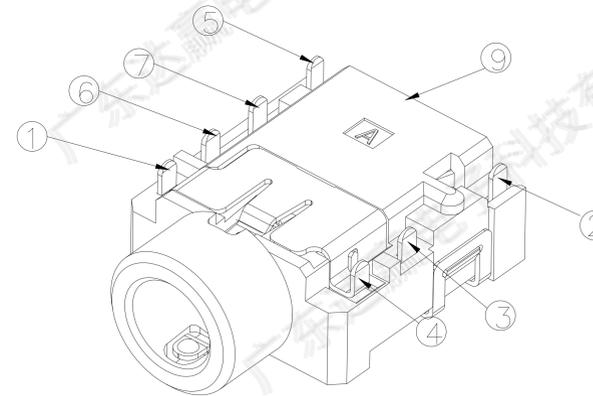


MODEL NO. :  
 PJ-D3261I - A BK7 AS04 L - RH  
 (1) (2) (3) (4) (5) (6)


- (1) Series no.
- (2) Schematic type: A, B, C
- (3) Housing color:  
BK7=Black
- (4) Terminal plating:  
AS04=Plating Tin/Gold 5u" min.
- (5) Packing mode:L=Reel packing
- (6) Environmental requirements:  
RH=RoHS 2.0 +Halogen Free

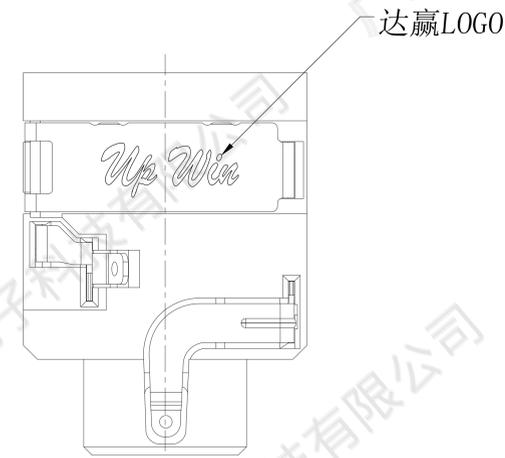

RECOMMENDED P.C.B LAYOUT  
 TOP VIEW (TOLRANCE: ±0.05)

SPECIFICATION:

1. Electrical characteristics
  - 1-1. Current rating: DC 0.5A max.
  - 1-2. Voltage rating: DC 30V.
  - 1-3. Contact resistance: 50mΩ max.
  - 1-4. Insulation resistance: 100MΩ min. at 500V DC.
  - 1-5. Withstanding voltage: 500V AC for 1 minute.
2. Mechanical characteristics
  - 2-1. Life test: 5000 cycles min,
  - 2-2. Mating force: Before the test 7~20N.  
After the test 5~20N.
  - Unmating force: Before the test 5~20N.  
After the test 3~20N.
3. Salt spray test time: 24 hours min.

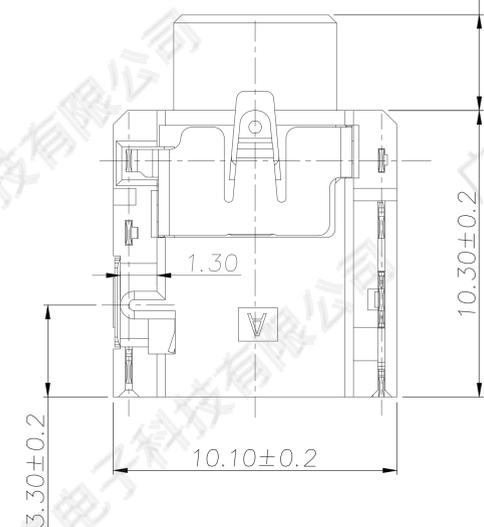

9	Housing	1	PA10T R630NH+30%GF UL 94V-0	Black
8	Insulator	1	PA10T R630NH+30%GF UL 94V-0	Black
5	Transfer Spring [5]	1	Phosphor bronze, 0.20t	Gold Flash On Contact Area And Solder Tail Area, All over 40u"Nickel Plated
7	shell	1	Phosphor bronze, 0.20t	Nickel Plated
6	Shunt terminal [6]	1	Phosphor bronze, 0.20t	Au5u" On Contact Area Tin 80u"Plating on Solder Tail Area
4	Ring spring [4]	1	Phosphor bronze, 0.20t	
3	Ring spring [3]	1	Phosphor bronze, 0.20t	
2	Tip spring [2]	1	Phosphor bronze, 0.20t	
1	Earth spring [1]	1	Phosphor bronze, 0.20t	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

Angle	±2°	DESIGN	罗振强	2018.07.03
.x	±0.35	CHECK		
.xx	±0.25	APPROVAL		
.xxx	±0.10			
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: 1:1	UNIT:mm	A4

广东达赢电子科技有限公司  
 Guangdong DaYing Electronic Technology Co., Ltd.

ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.
	A-0	2018.07.03	NEW	罗振强	李海鸥

CUSTOMER DRAWING	TITLE:	Ø3.5mm PHONE JACK
	MODEL NO.	PJ-D3261I-ABK7AS04L-RH
	FILE NO.	Q/SSY.QW-001A-xxxx