
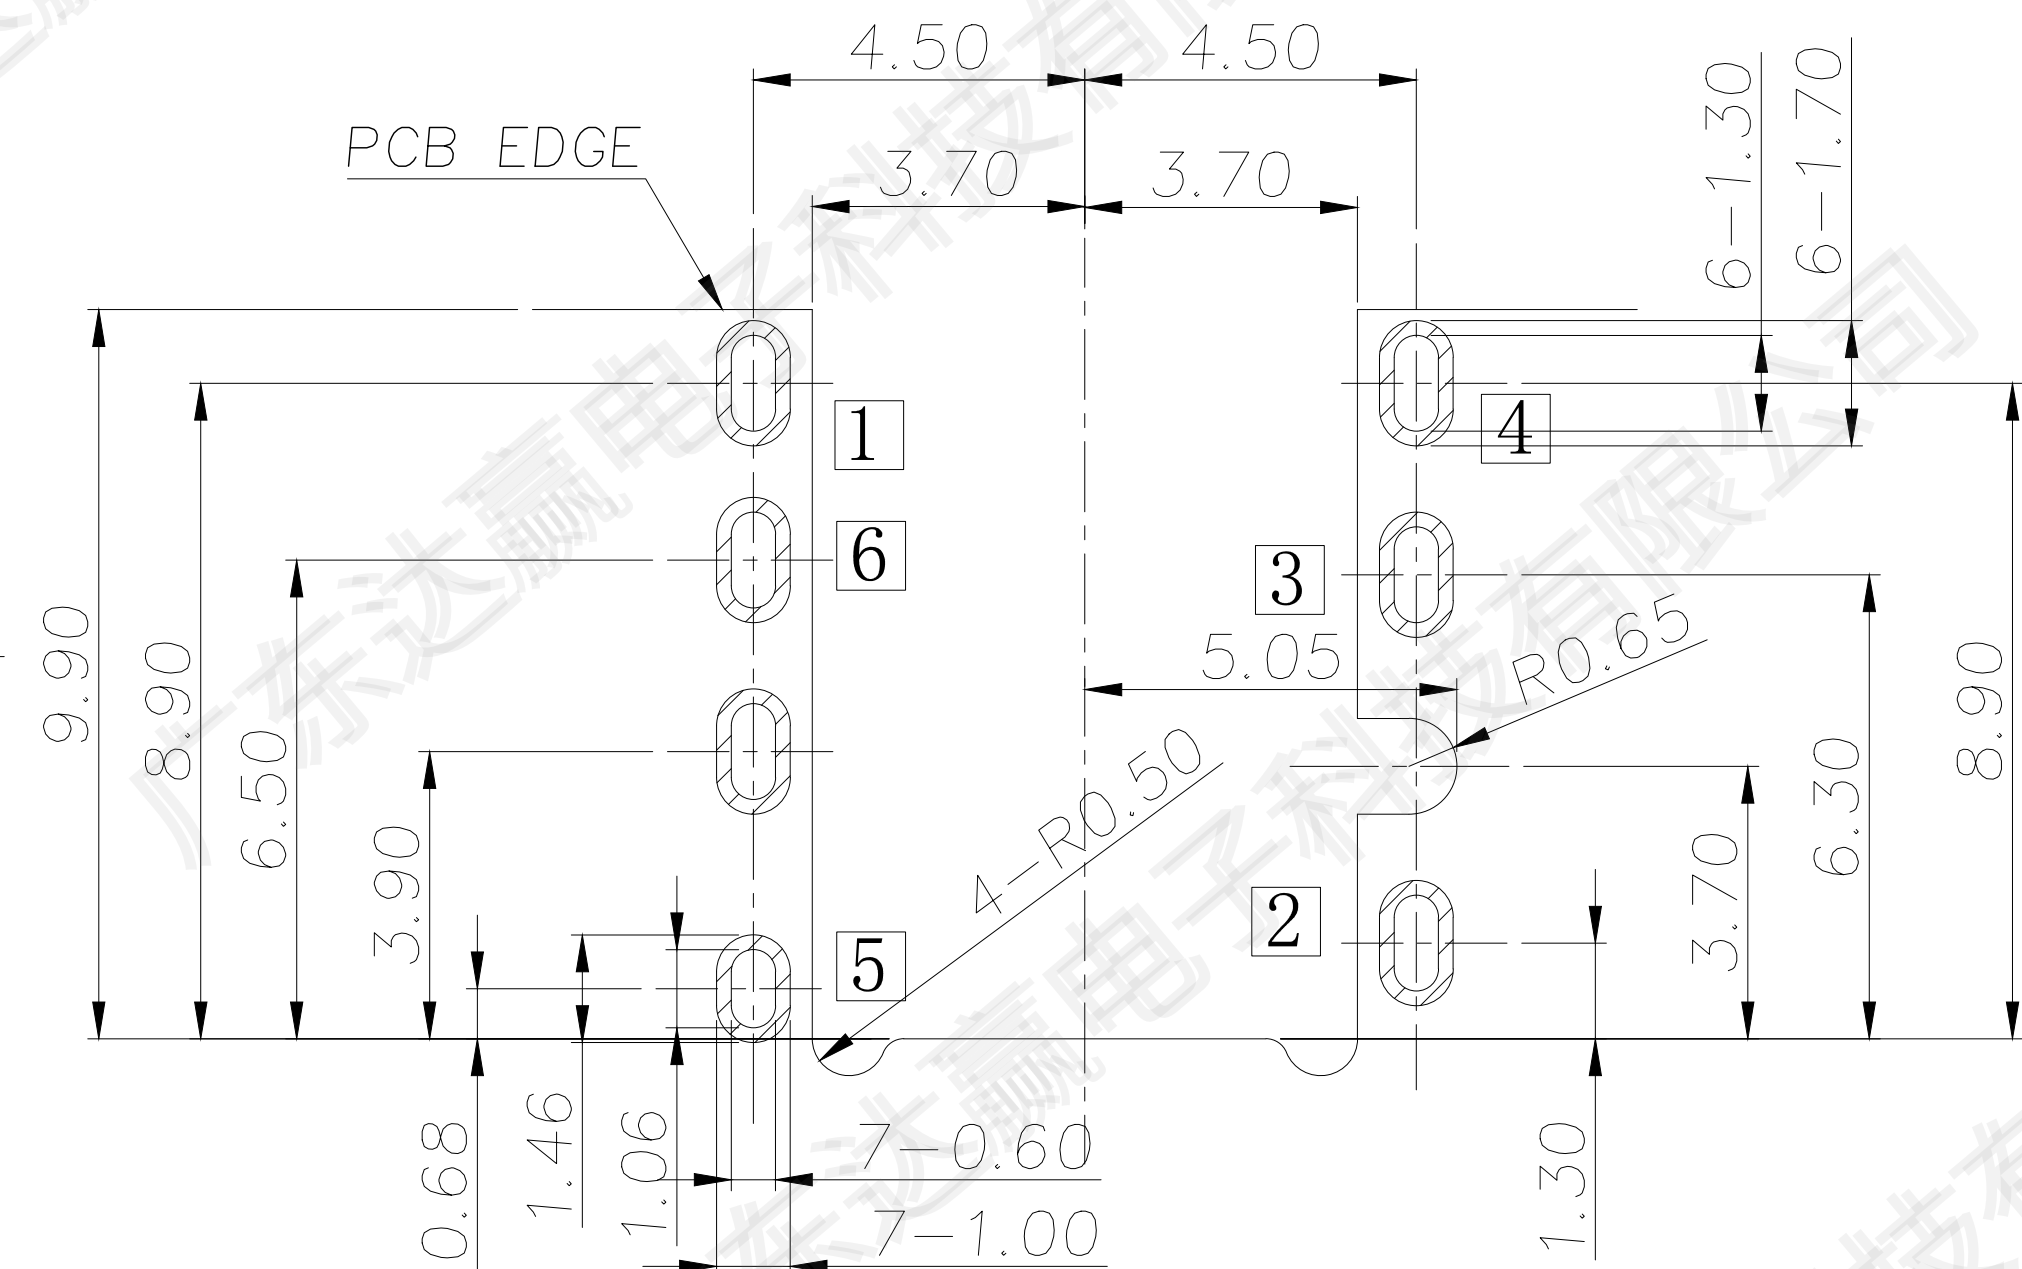
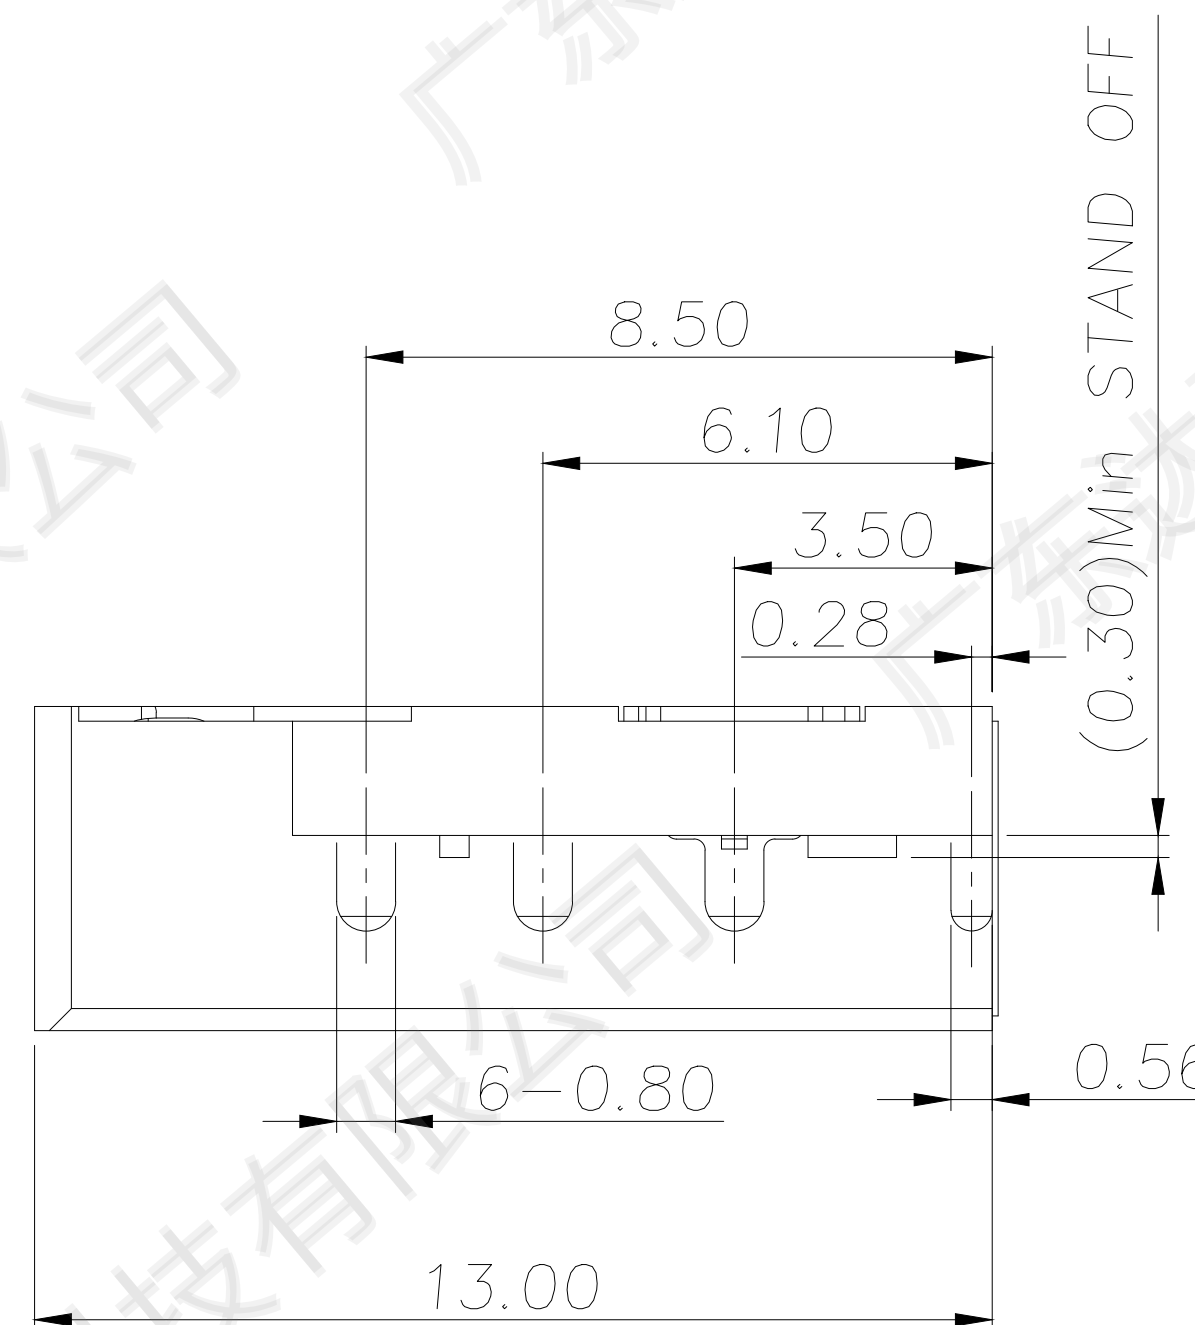
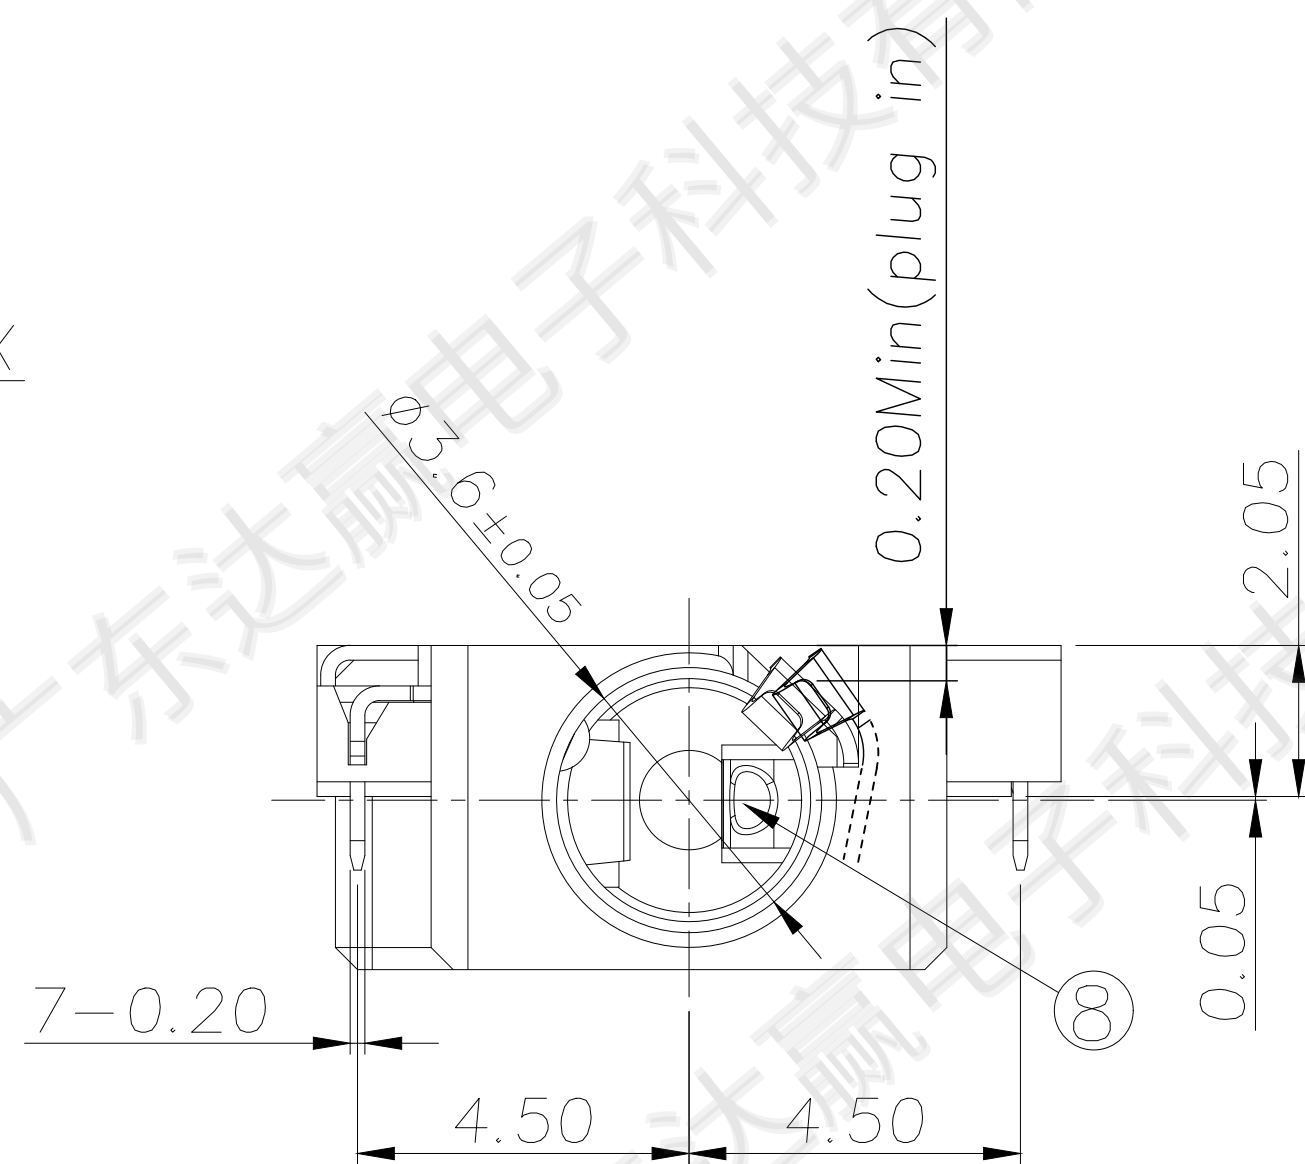
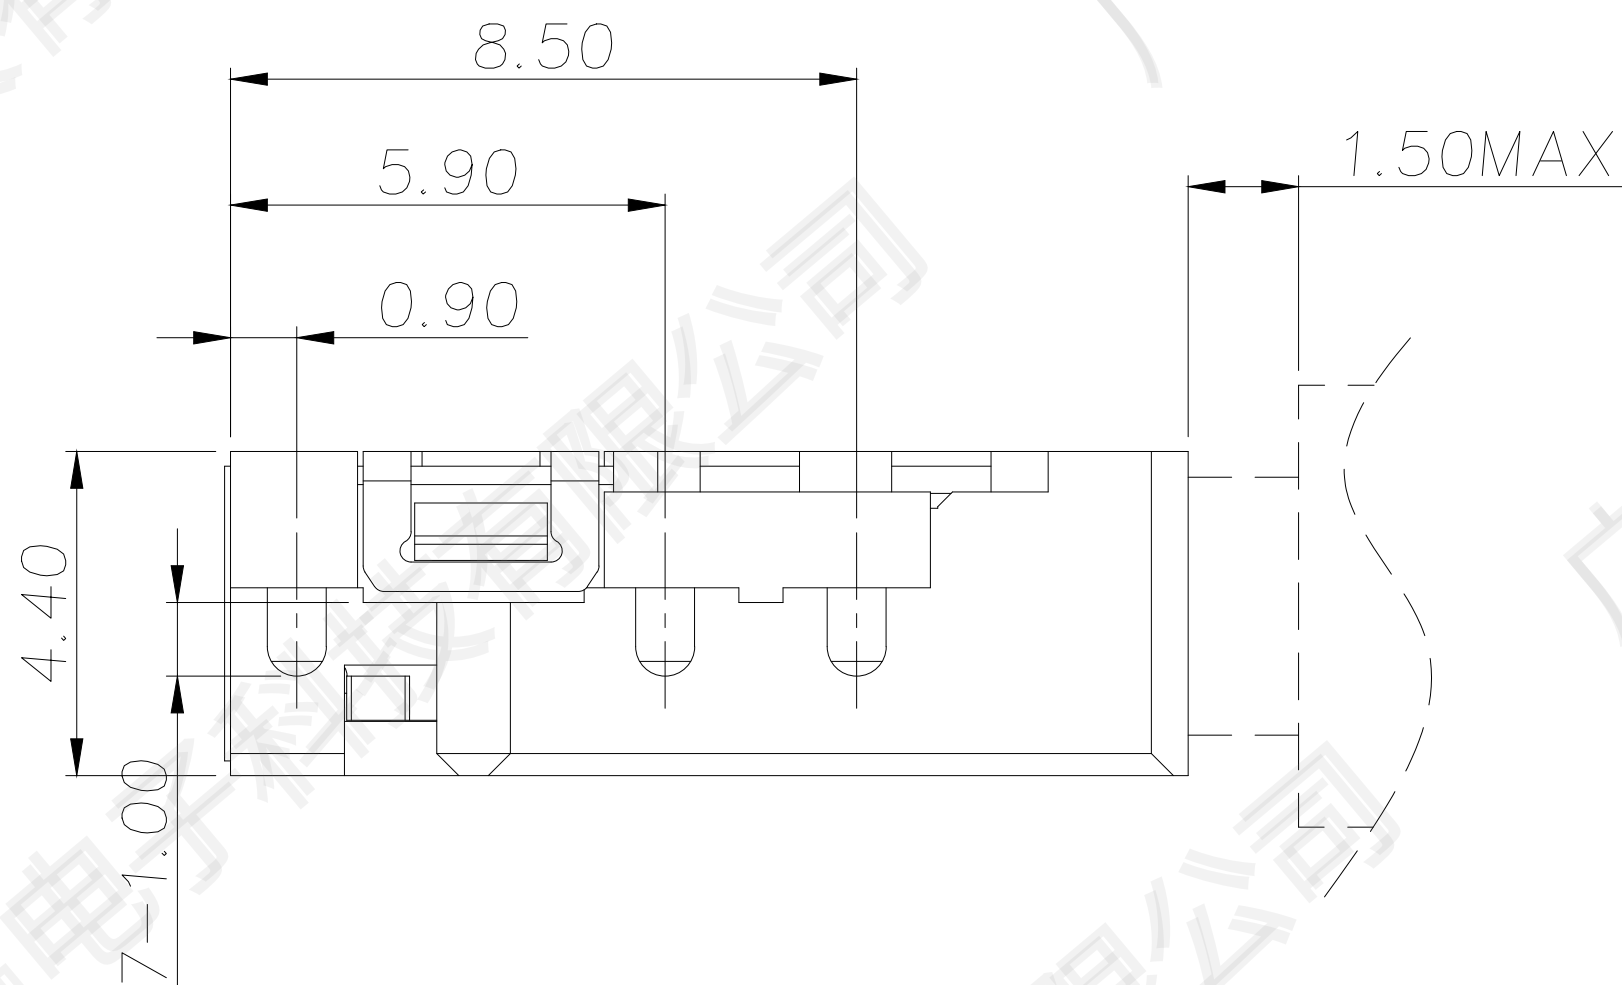
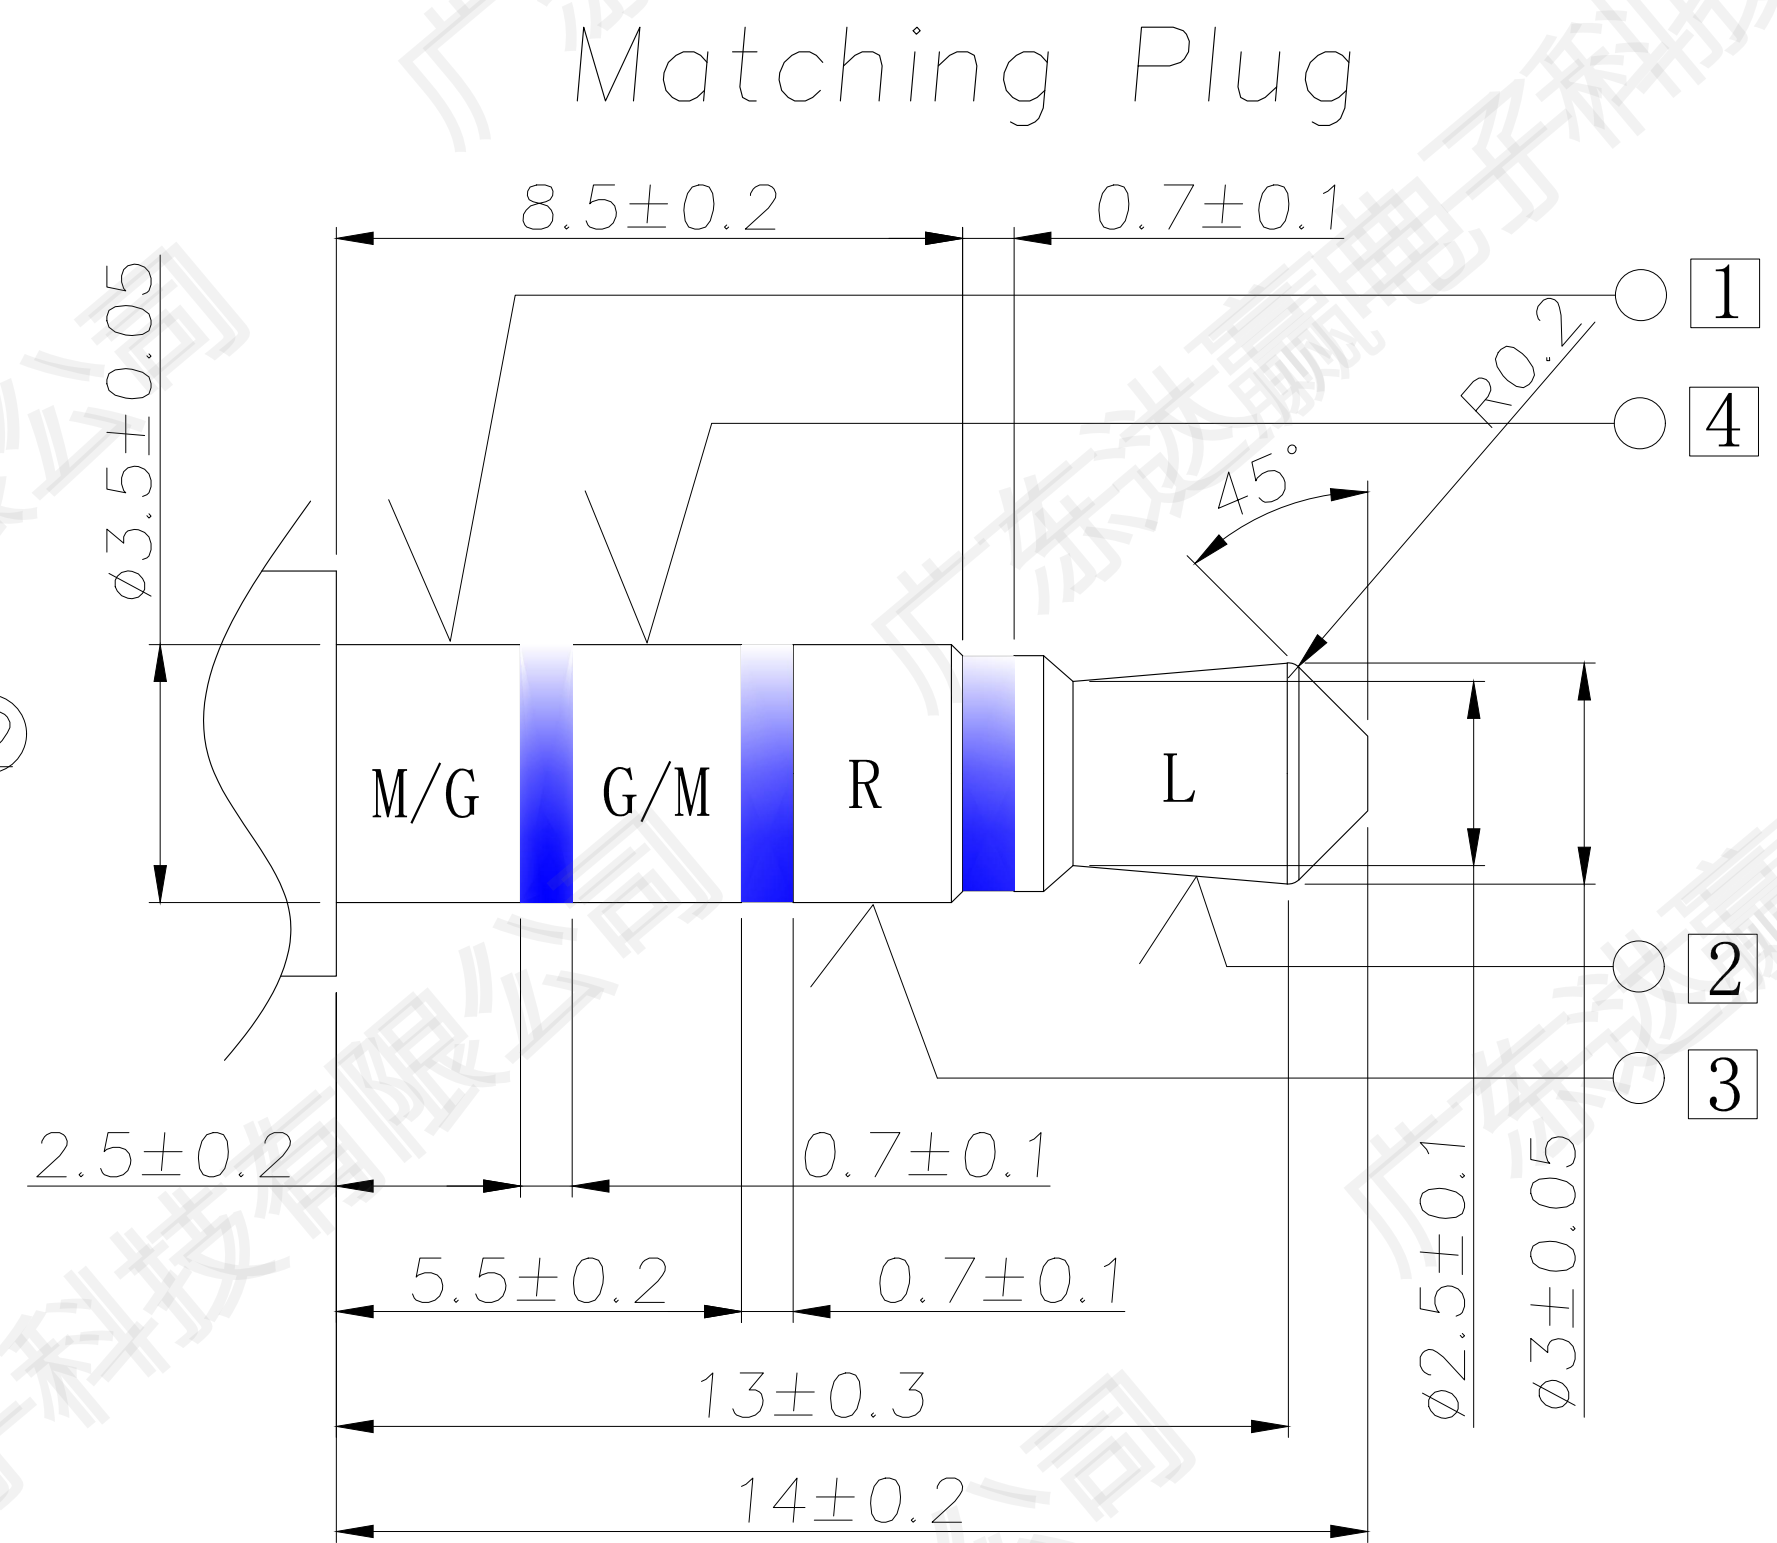
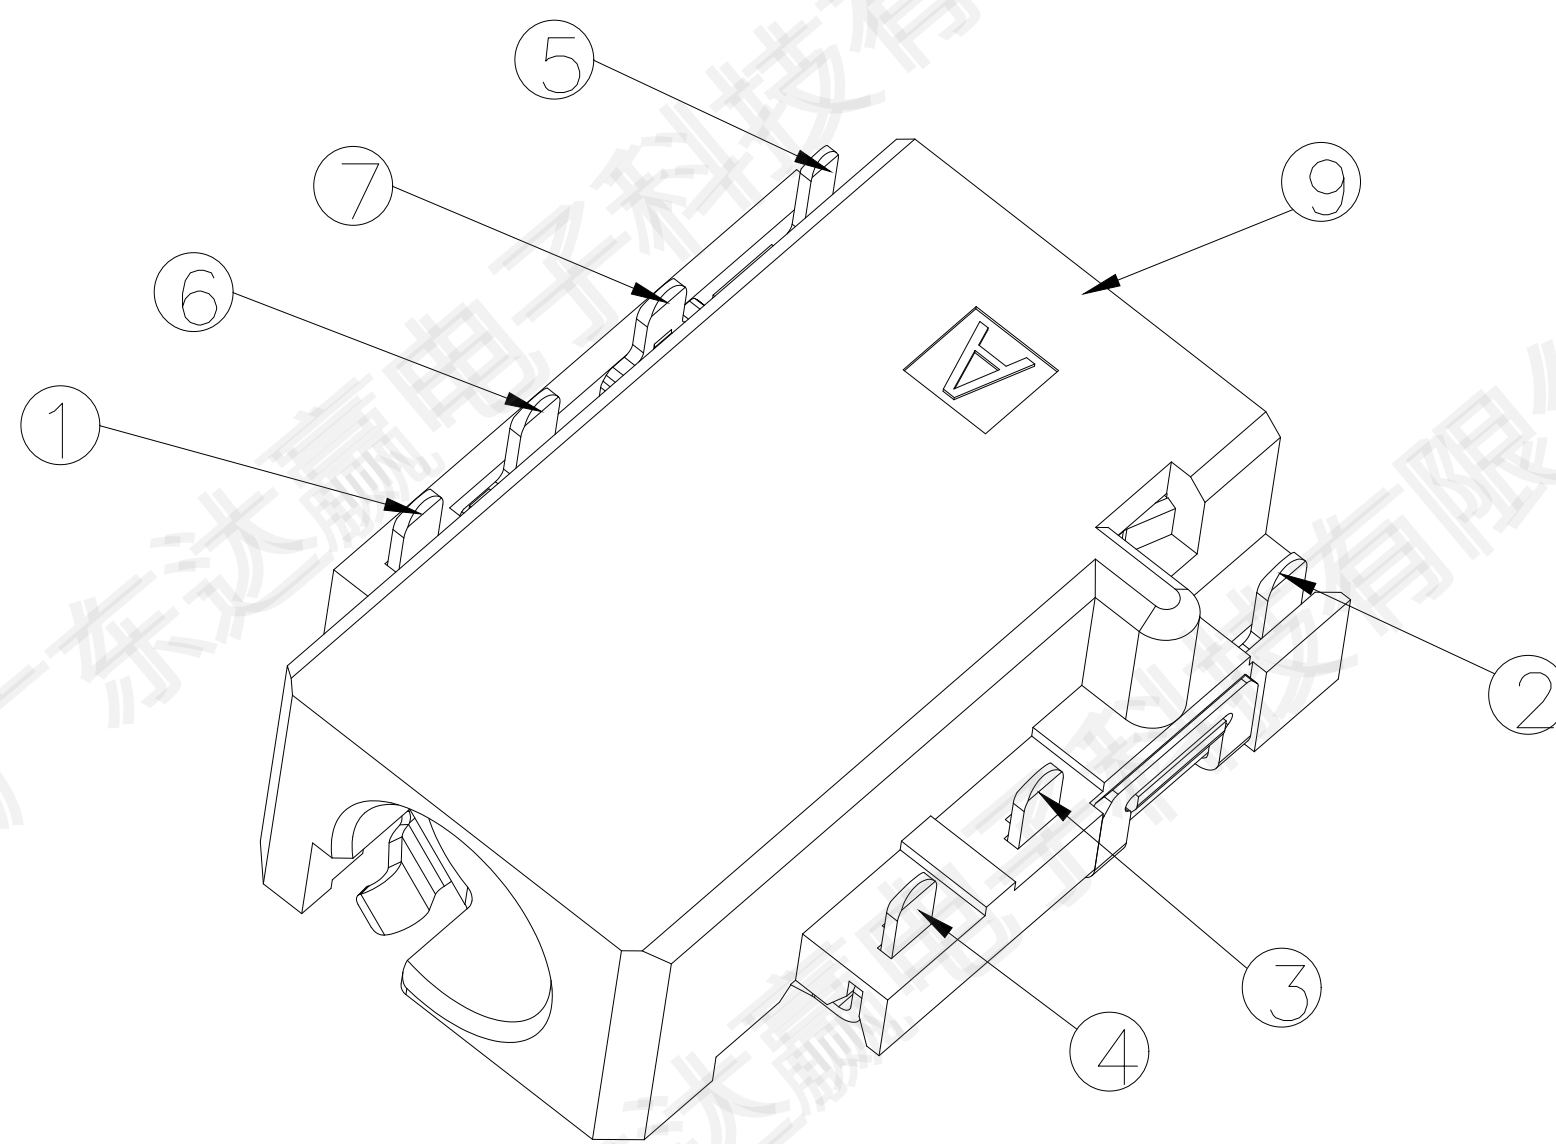
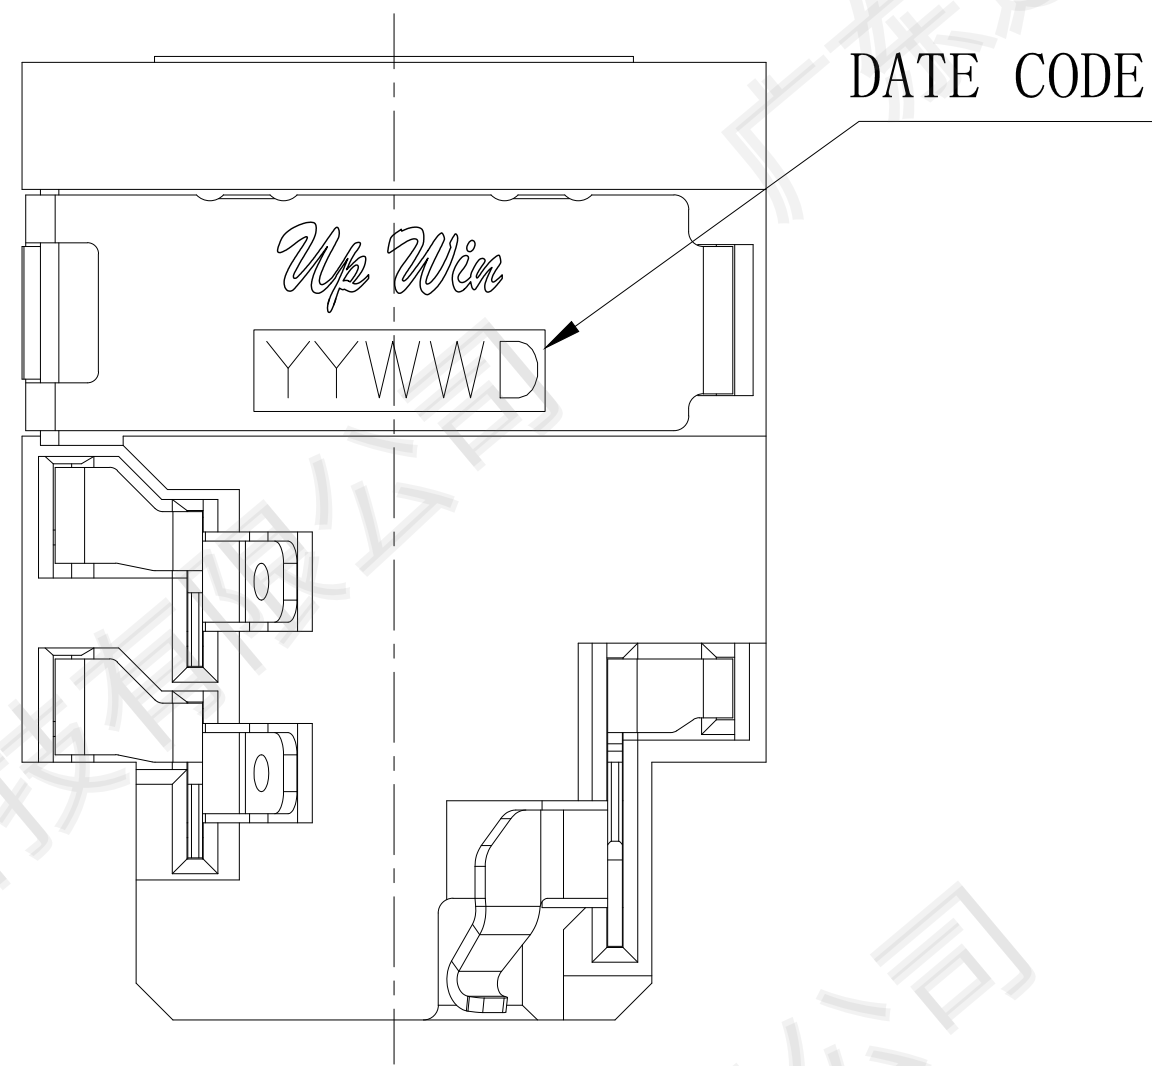


MODEL NO. :  
PJ-D3261K - A BK7 AS02 L - RH  
(1) (2) (3) (4) (5) (6)



- (1) Series no.  
(2) Schematic type: A, B, C  
(3) Housing color:  
BK7=Black  
(4) Terminal plating:  
AS02=Plating Tin/Gold 1u" min.  
(5) Packing mode:L=Reel packing  
(6) Environmental requirements:  
RH=RoHS 2.0 + Halogen Free

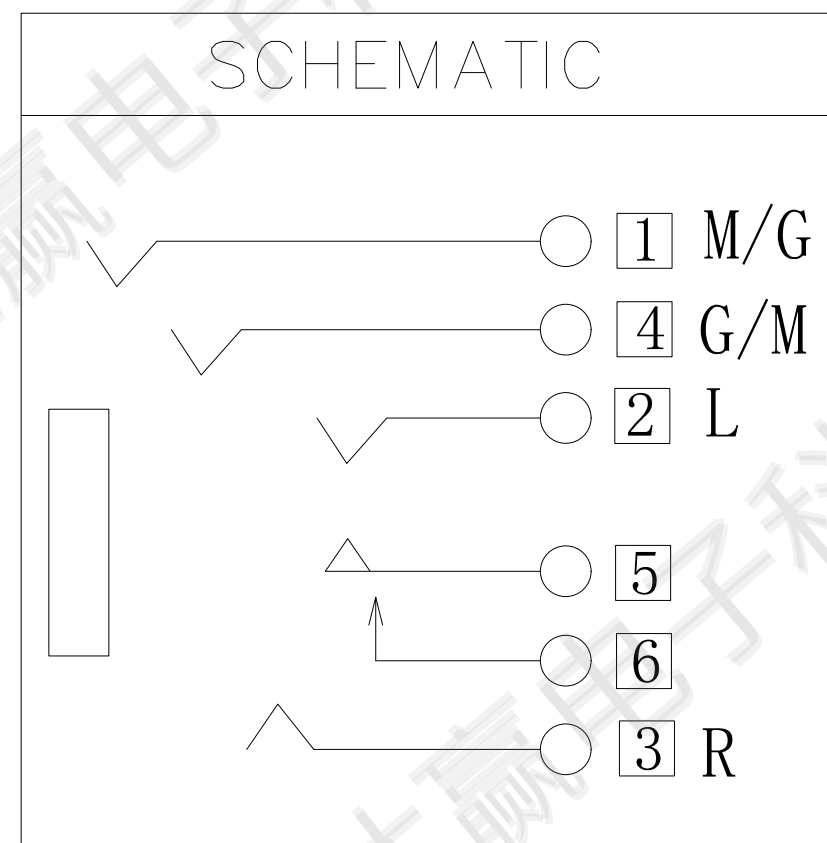

RECOMMENDED P. C. B LAYOUT  
TOP VIEW (TOLRANCE: ±0.05)

SPECIFICATION:

1. Electrical characteristics  
1-1. Current rating: DC 1.0A max.  
1-2. Voltage rating: DC 12V.  
1-3. Contact resistance: 50mΩ max.  
1-4. Insulation resistance: 100MΩ min. at 500V DC.  
1-5. Withstanding voltage: 500V AC for 1 minute.  
2. Mechanical characteristics  
2-1. Life test: 5000 cycles min,  
2-2. Mating force: 3~30N.  
Unmating force: 3~30N.

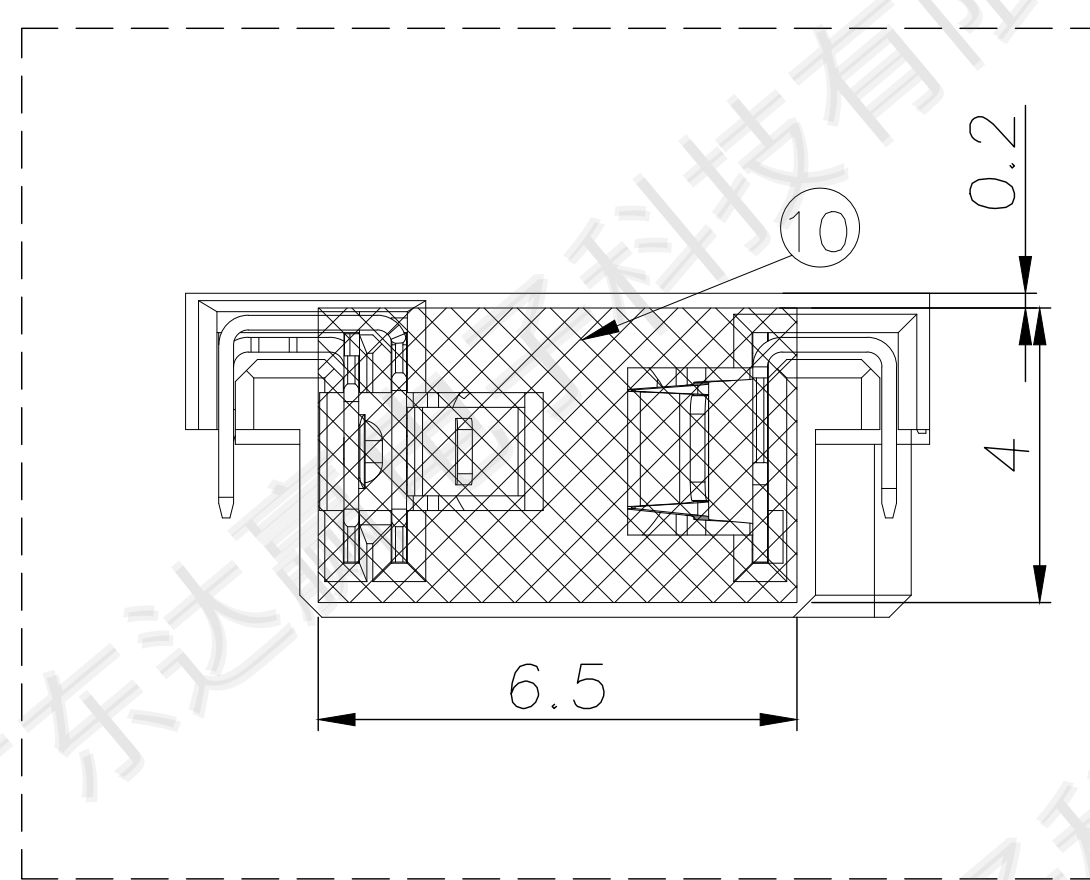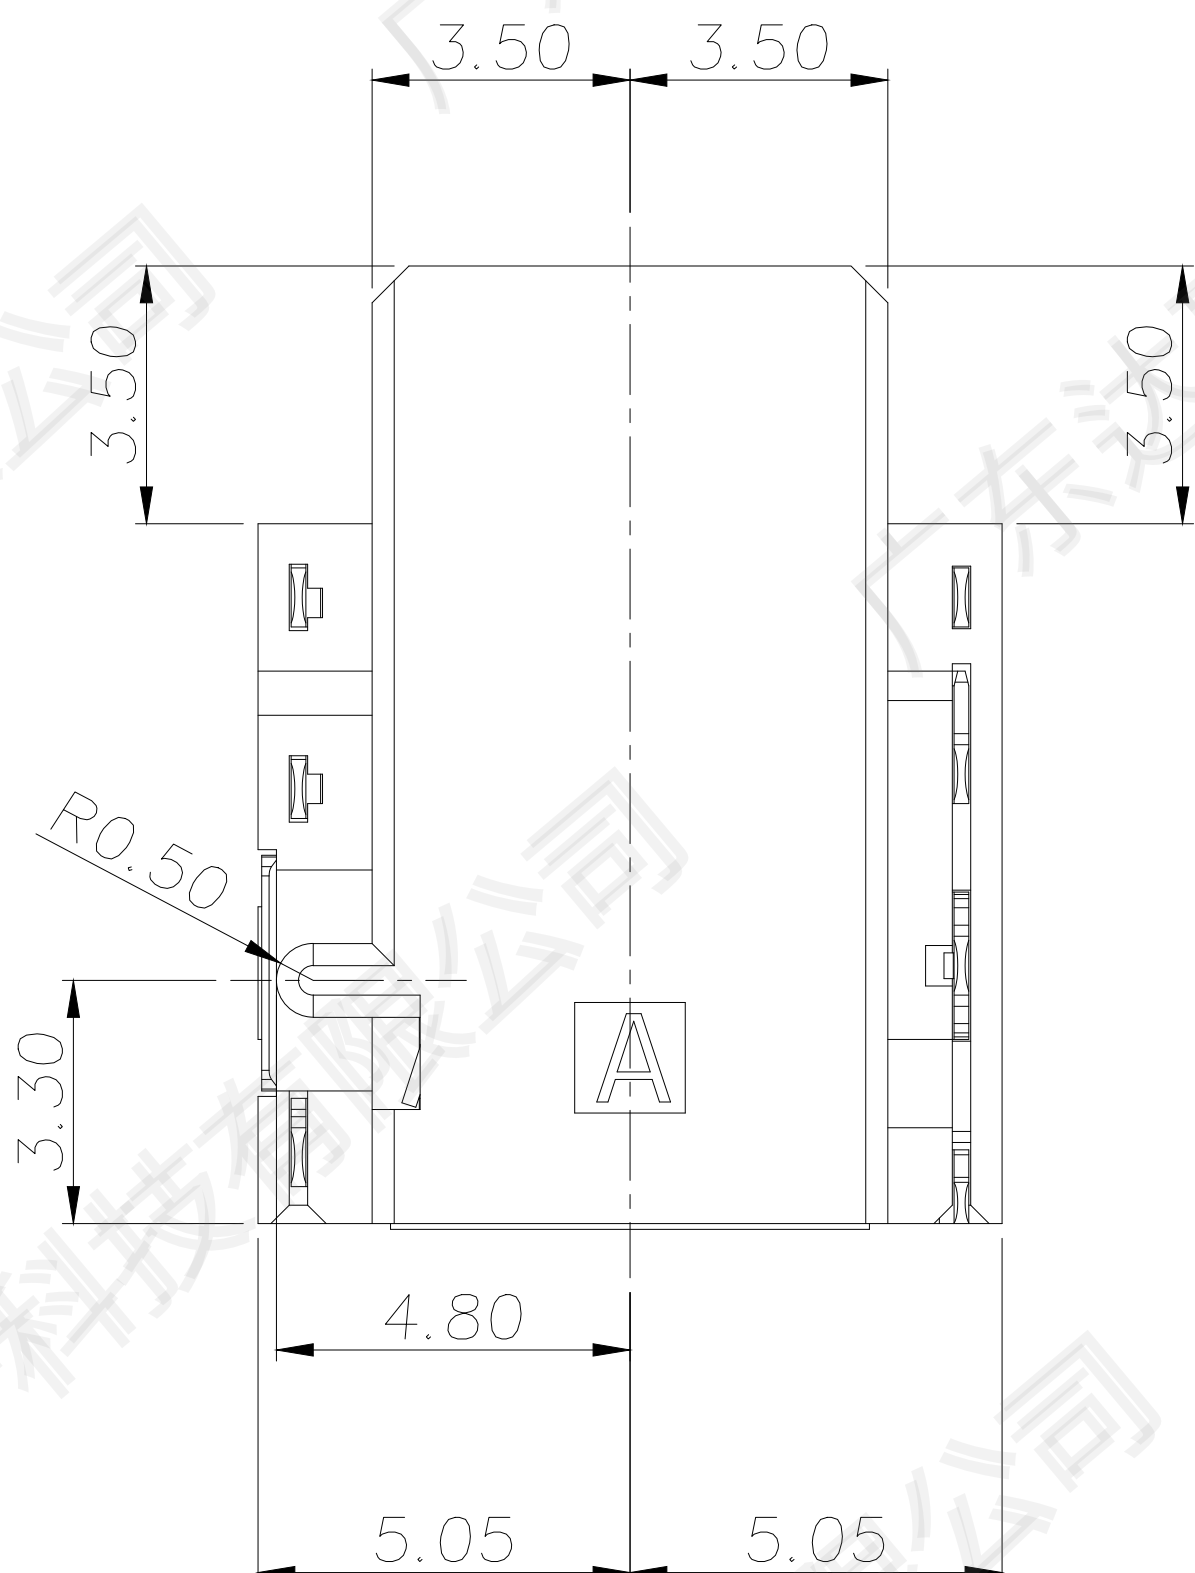

|     |                   |     |                          |                                                                              |
|-----|-------------------|-----|--------------------------|------------------------------------------------------------------------------|
| 10  | Mylar             | 1   | Kapton                   | Yellow                                                                       |
| 9   | Housing           | 1   | HIGH TEMPERATURE PLASTIC | Black                                                                        |
| 8   | Insulator         | 1   | HIGH TEMPERATURE PLASTIC | Black                                                                        |
| 5   | Transfer Spring 5 | 1   | Phosphor bronze, 0.20t   | Gold Flash On Contact Area And Solder Tail Area, All over 50u" Nickel Plated |
| 7   | shell             | 1   | Phosphor bronze, 0.20t   | Plating Ni 50u"                                                              |
| 6   | Shunt terminal 6  | 1   | Phosphor bronze, 0.20t   | Gold Flash On Contact Area                                                   |
| 4   | Ring spring 4     | 1   | Phosphor bronze, 0.20t   | 80u"matte tin                                                                |
| 3   | Ring spring 3     | 1   | Phosphor bronze, 0.20t   | Plating on Solder Tail                                                       |
| 2   | Tip spring 2      | 1   | Phosphor bronze, 0.20t   | Area, All over 50u"Nickel Plated                                             |
| 1   | Earth spring 1    | 1   | Phosphor bronze, 0.20t   |                                                                              |
| NO. | DESCRIPTION       | QTY | MATERIAL                 | REMARK                                                                       |

广东达赢电子科技有限公司  
Guangdong DaYing Electronic Technology Co., Ltd.

TITLE:  $\phi$ 3.5mm PHONE JACK  
MODEL NO. PJ-D3261K-ABK7AS02L-RH  
FILE NO. Q/SSY.QW-001A-0XXX

|         |     |              |                |        |         |                                             |            |         |              |              |
|---------|-----|--------------|----------------|--------|---------|---------------------------------------------|------------|---------|--------------|--------------|
|         |     |              |                |        | Angle   | ±2°                                         | DESIGN     | 李海鸥     | 2017. 12. 11 |              |
|         |     |              |                |        | 10<L≤20 | ±0.30                                       | CHECK      |         |              |              |
|         | A-1 | 2017. 12. 11 | 客户要求增加尾部MYLAR. | 李海鸥    | 5<L≤10  | ±0.25                                       | APPROVAL   |         |              |              |
|         | A-0 | 2017. 11. 20 | NEW            | 李海鸥    | L≤5     | ±0.20                                       |            |         |              |              |
| ECN NO. | REV | DATE         | DESCRIPTION    | CHANGE | APPRO.  | GENERAL TOLERANCE<br>UNLESS OTHERWISE NOTED | SCALE: 3:1 | UNIT:mm | A4           | SHEET:1 of 1 |