
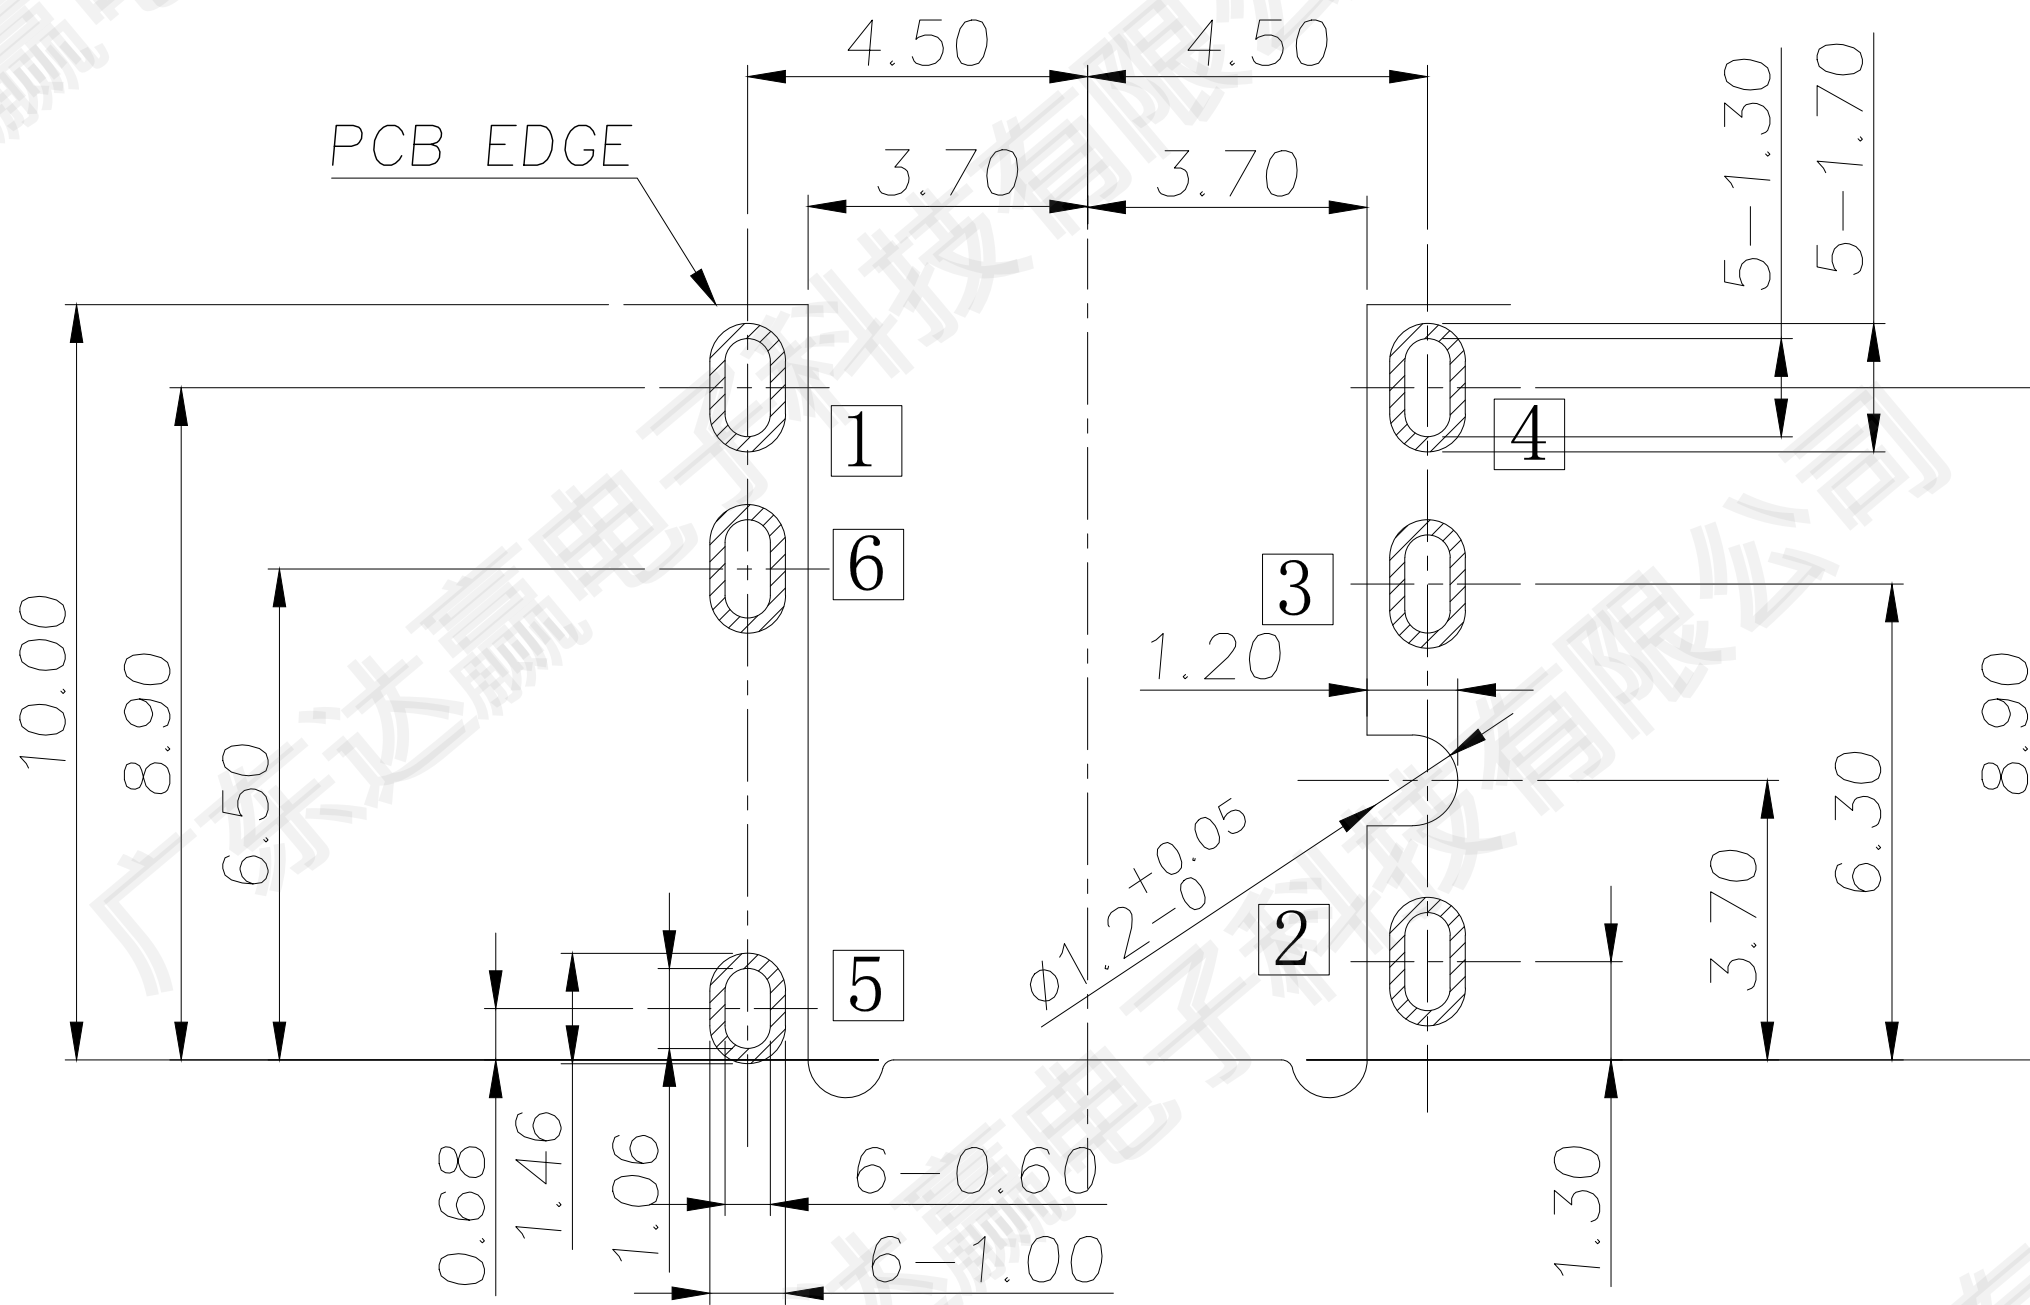
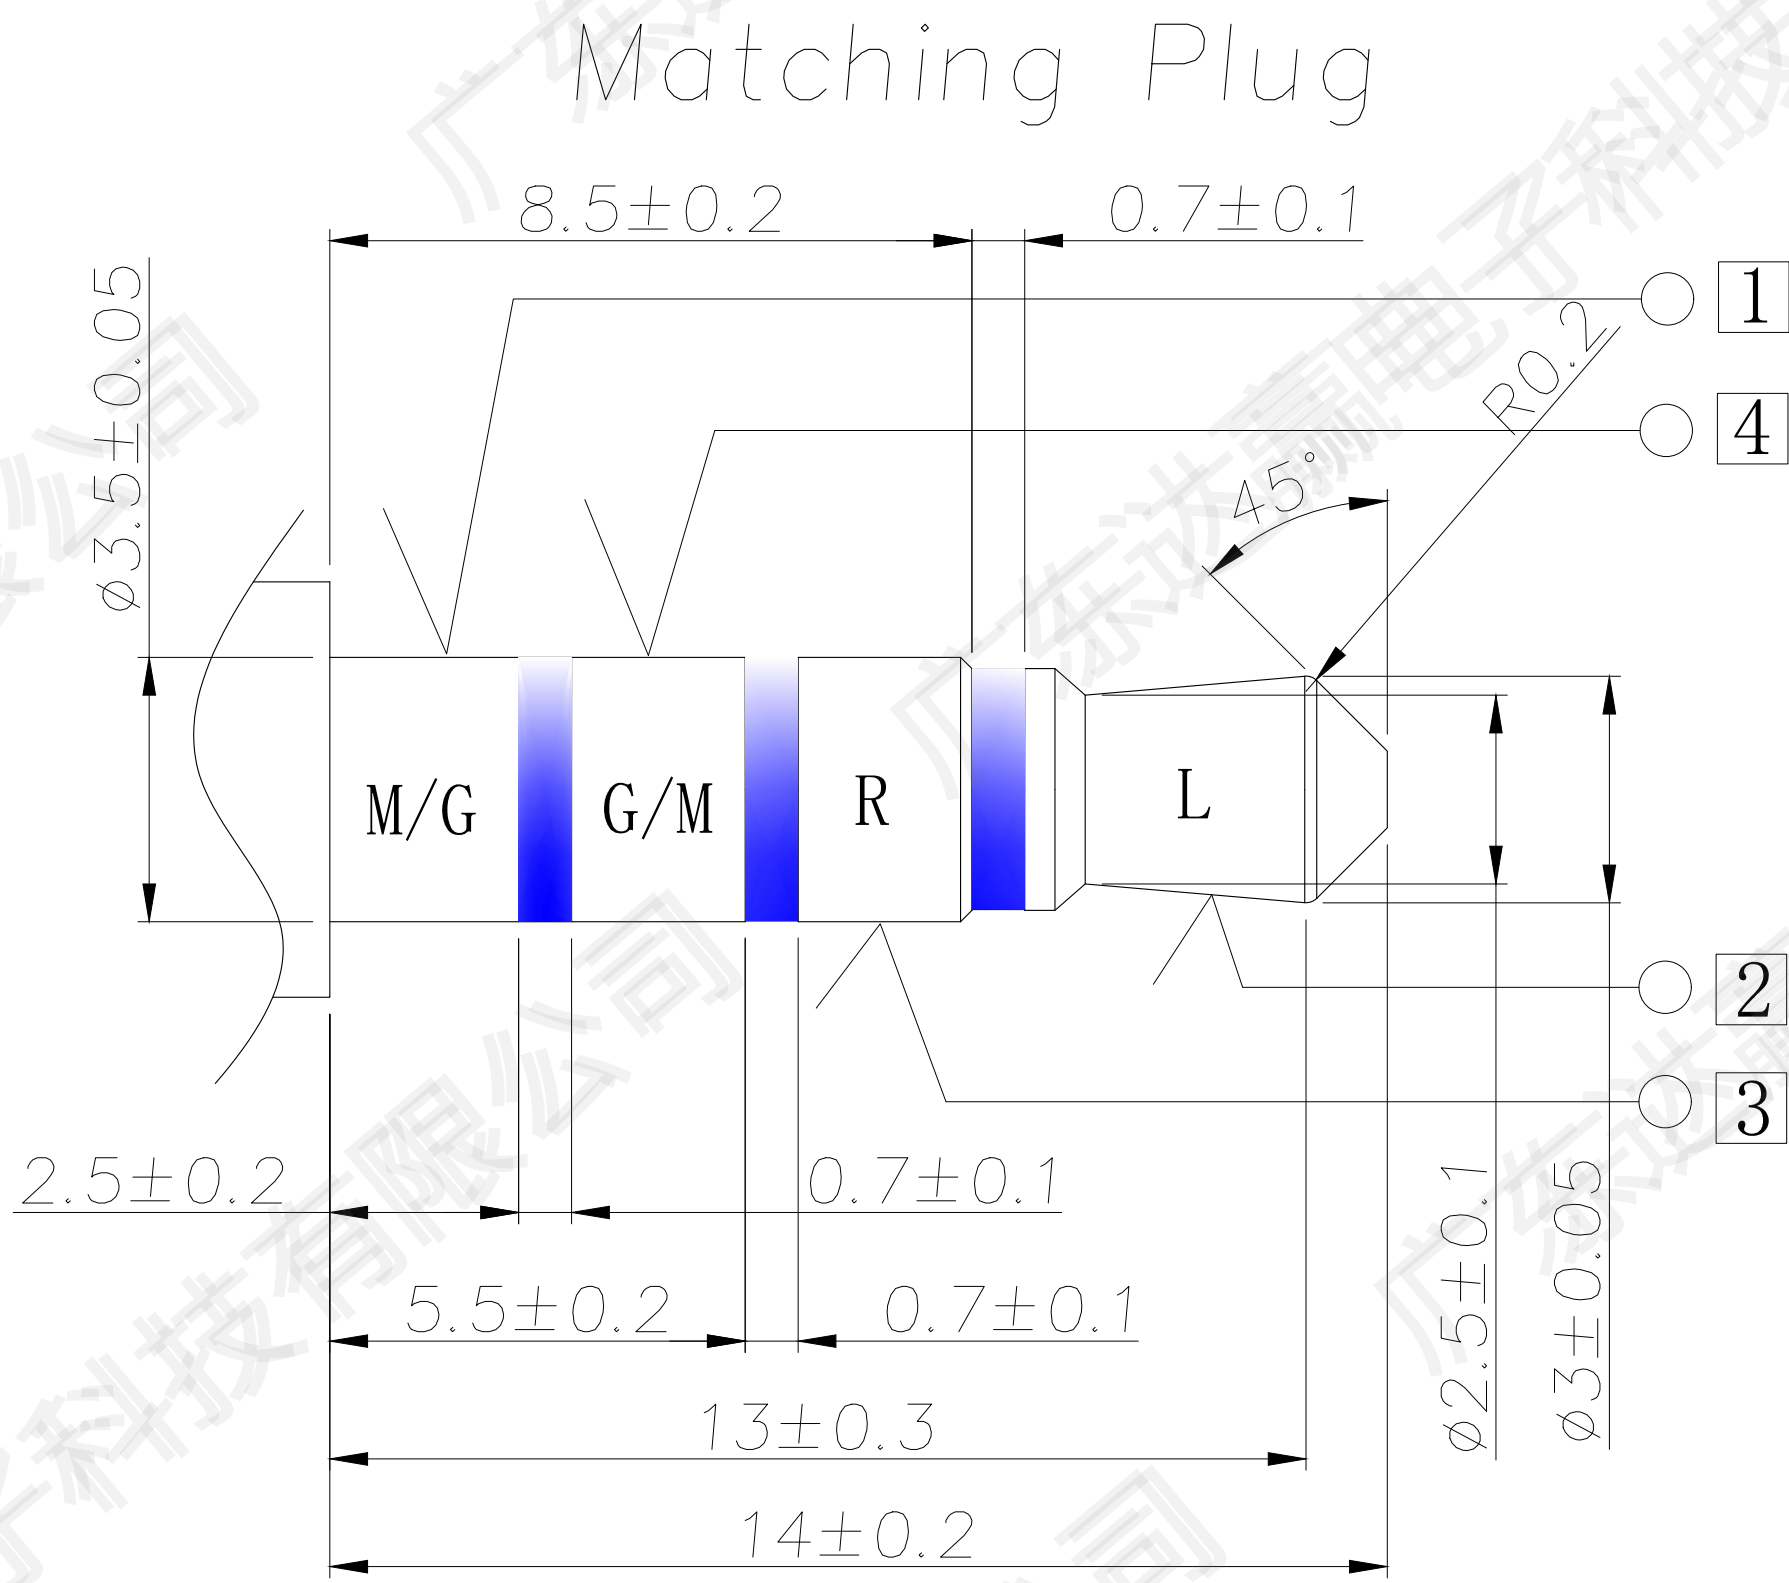
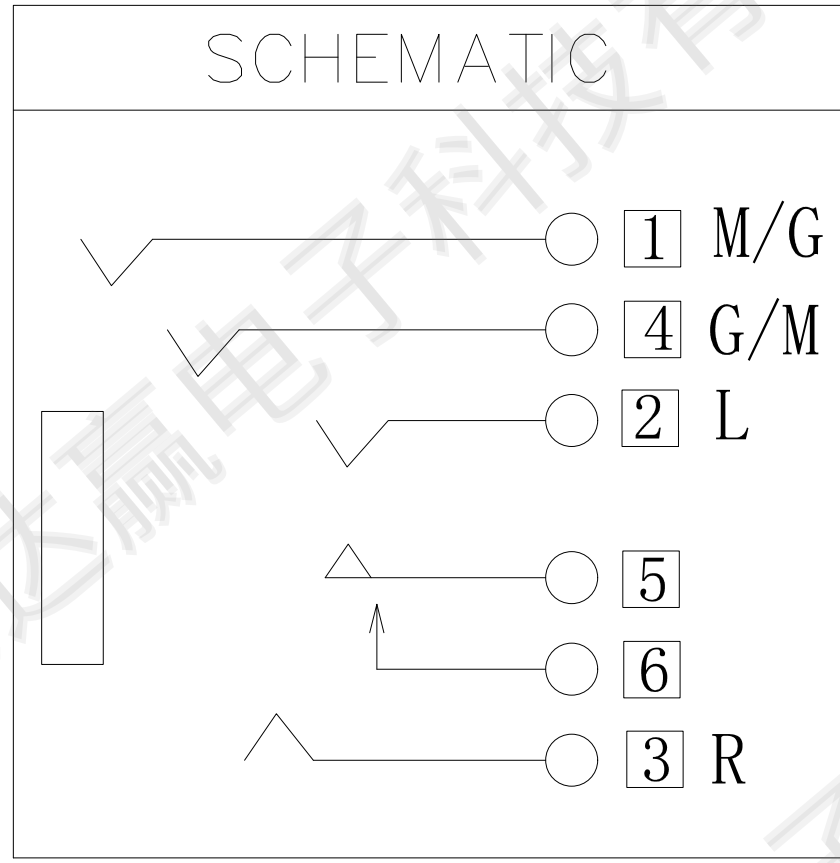
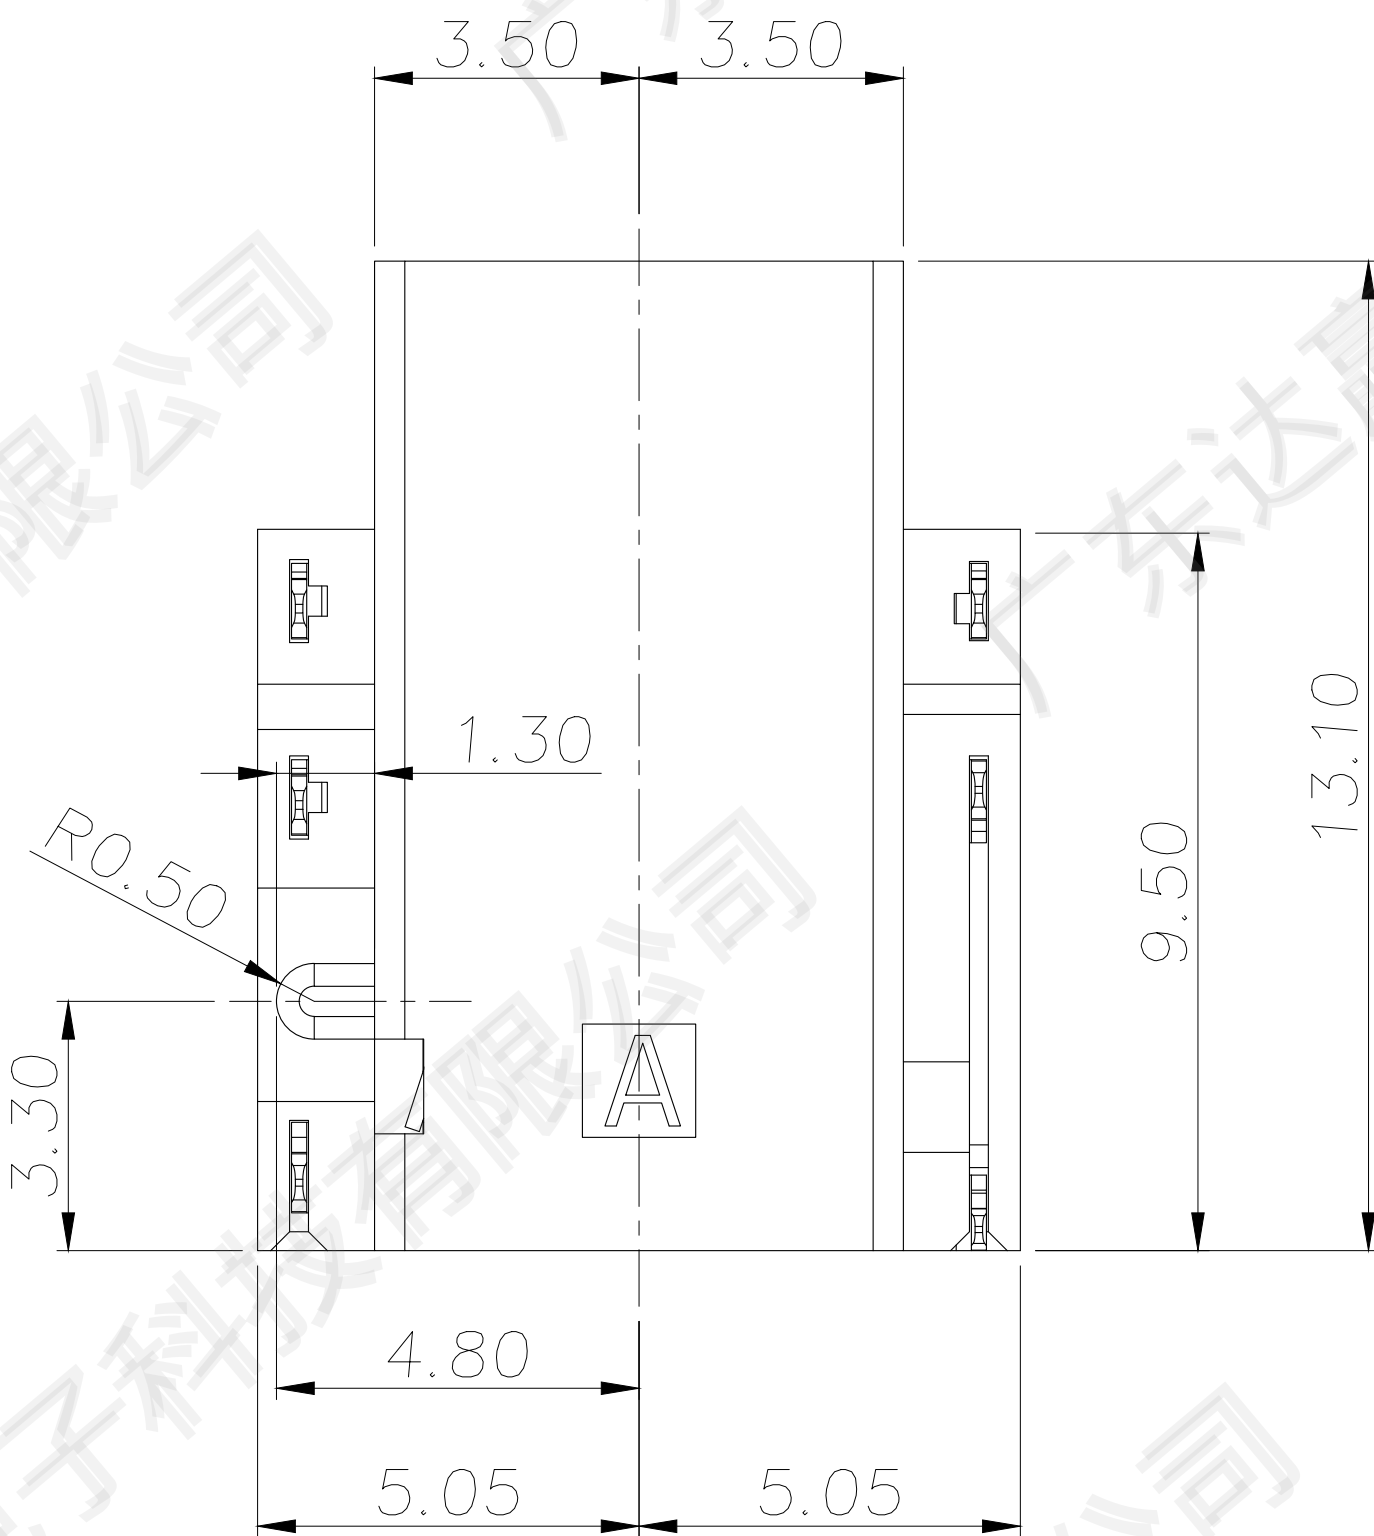
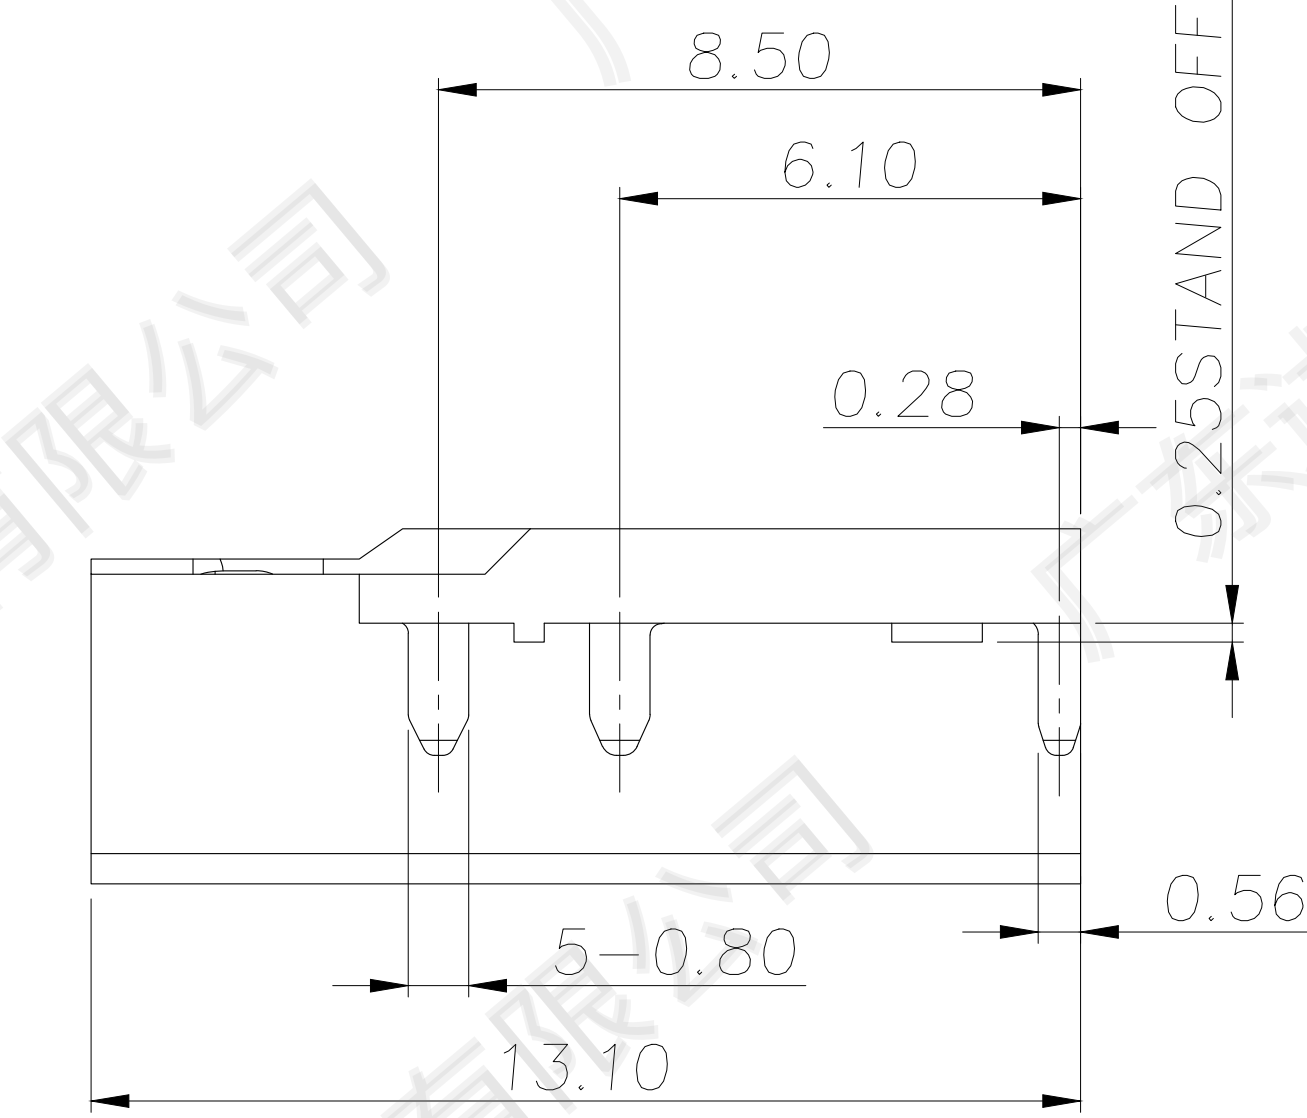
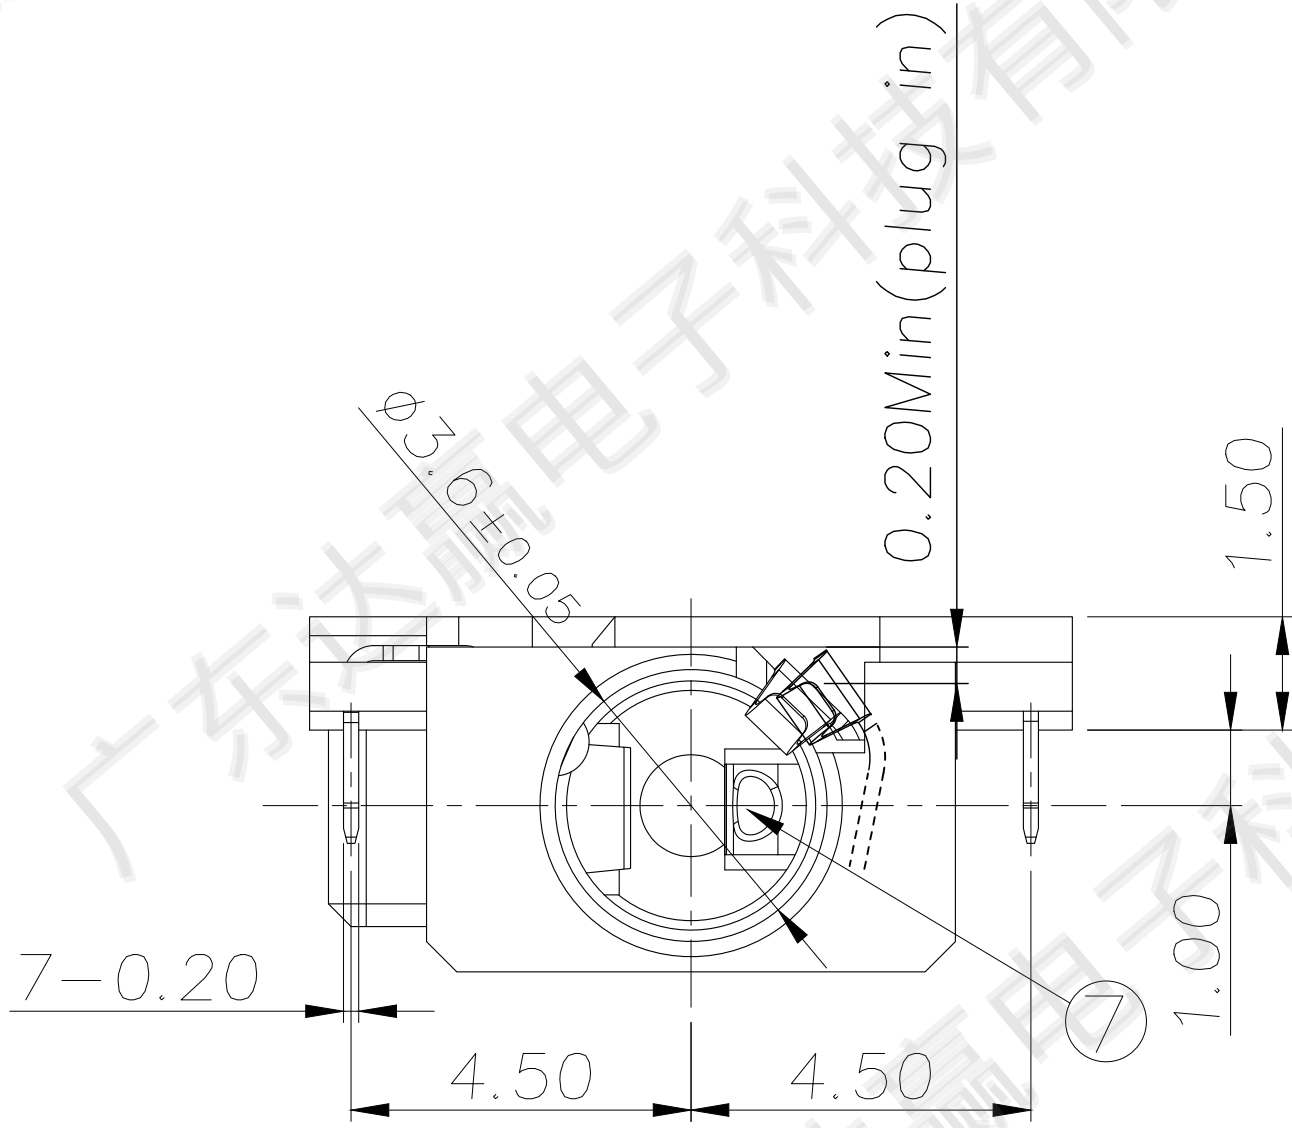


MODEL NO. :
PJ-D3261Q-ABK7xxxxL-RH
(1) (2)(3) (4)(5)(6)

- (1) Series no.
(2) Schematic type: A
(3) Housing color:
BK7=Black
(4) Terminal plating:
AS02=Plating Tin/Gold flash
AS03=Plating Gold 3u"
AS06=Plating Gold 30u"
(5) Packing mode:L=Reel packing
(6) Environmental requirements:
RH=RoHS 2.0 + Halogen Free

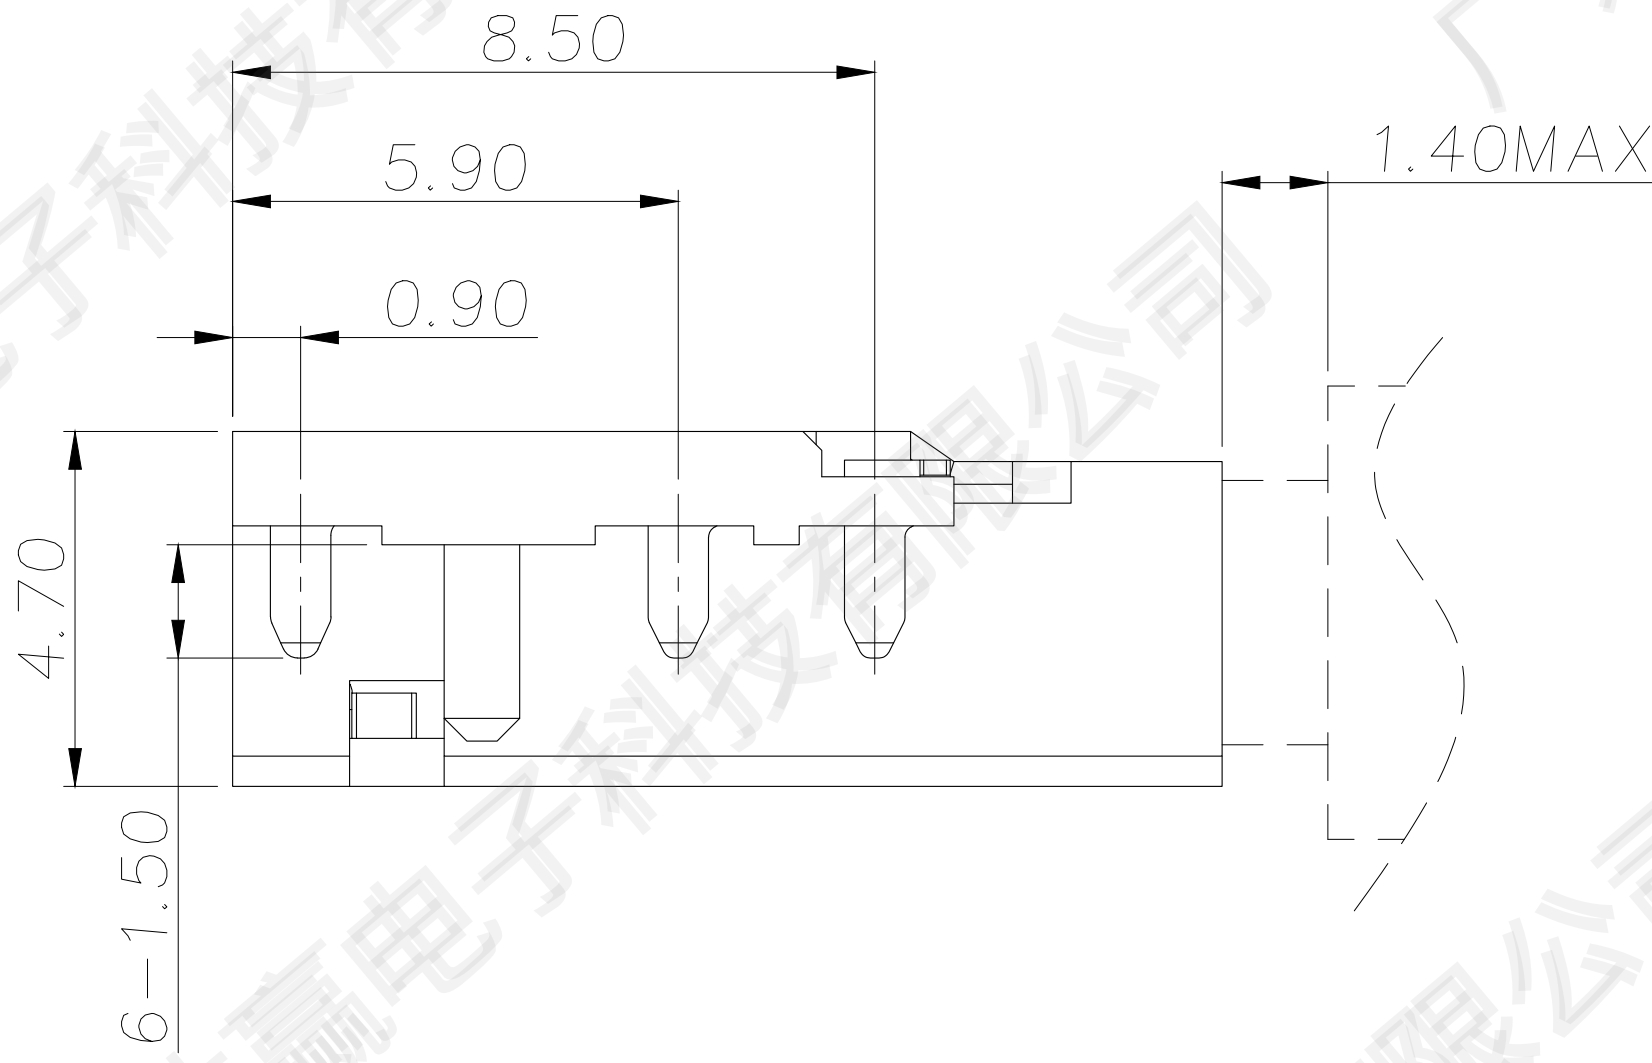


RECOMMENDED P. C. B LAYOUT
TOP VIEW (TOLRANCE: ±0.05)

- SPECIFICATION:
- 1.Electrical characteristics
- 1-1.Current rating:DC 1.0A max.
- 1-2:Voltage rating:DC 12V.
- 1-3:Contact resistance:50mΩ max.
- 1-4.Insulation resistance:100MΩ min. at 500V DC.
- 1-5.Withstanding voltage:500V AC for 1 minute.
- 2.Mechanical characteristics
- 2-1.Life test:5000 cycles min,
- 2-2.Mating force:3~30N.
- Unmating force:3~30N.

8	Housing	1	PA10T	Black
7	Insulator	1	PA10T	Black
5	Transfer spring [5]	1	C5210R, 0.20t	Gold Flash On Contact Area And Solder Tail Area, All Over 50u" Nickel Plated
6	Shunt terminal [6]	1	C5210R, 0.20t	Gold Flash On Contact Area 80u"Matte Tin Plating On Solder Tail Area, All over 50u"Nickel Plated
4	Ring spring [4]	1	C5210R, 0.20t	Gold flash/3u/30u" On Contact Area 80u"Matte Tin Plating On Solder Tail Area, All over 50u"Nickel Plated
3	Ring spring [3]	1	C5210R, 0.20t	
2	Tip spring [2]	1	C5210R, 0.20t	
1	Earth spring [1]	1	C5210R, 0.20t	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

 广东达赢电子科技有限公司
Guangdong DaYing Electronic Technology Co.,ltd.

						Angle	±2°	DESIGN	刘伟	2025.05.30
	A-2	2022.05.30	新增3u"规格	刘伟	余军	.x	±0.20	CHECK		
	A-1	2021.09.08	新增30u"规格	刘伟	余军	.xx	±0.15	APPROVAL		
	A-0	2021.01.29	NEW	刘伟	余军	.xxx	±0.10			
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: 1:1	UNIT:mm	A4 

CUSTOMER DRAWING	TITLE:	ø3.5mm PHONE JACK
	MODEL NO.	PJ-D3261Q-ABK7AS02, 03, 06L-RH
	FILE NO.	Q/DY. QW-001A-0732