
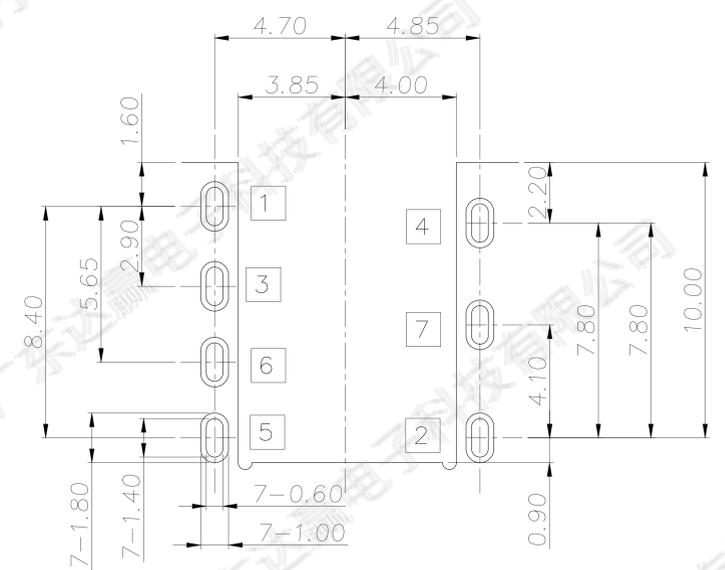
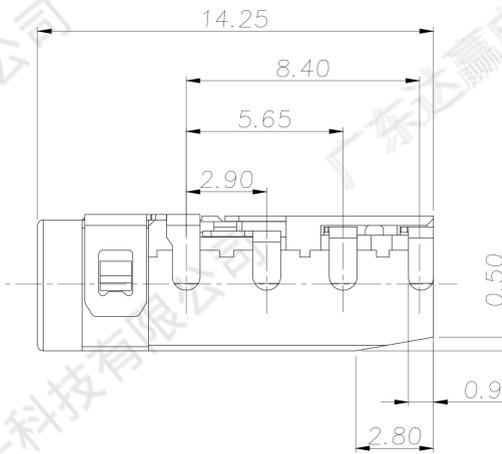
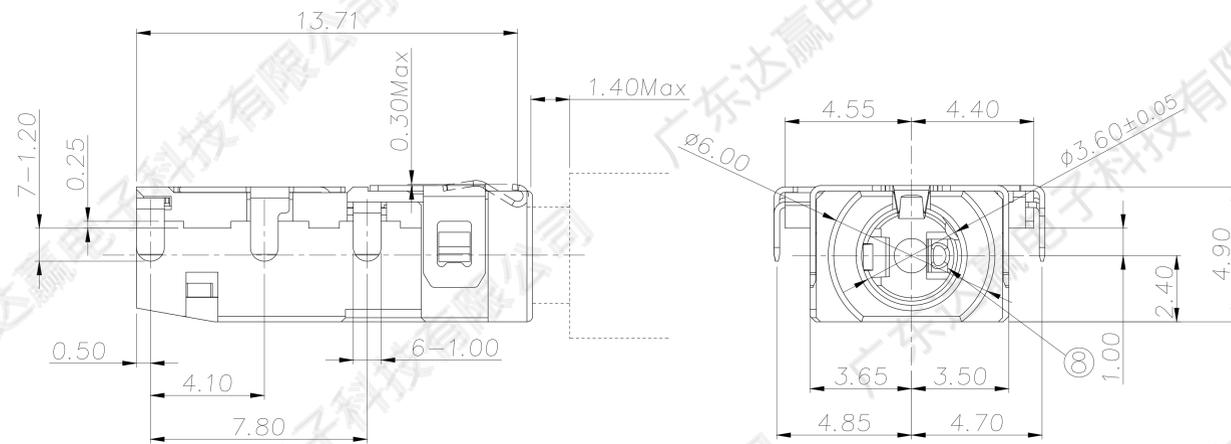
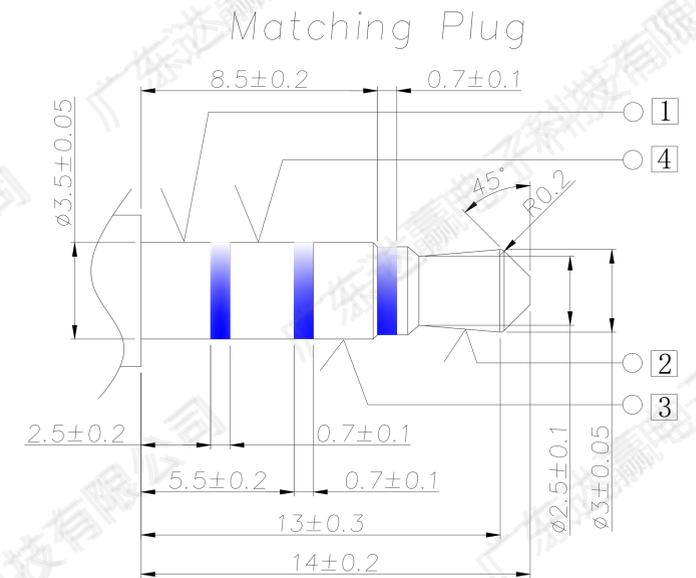
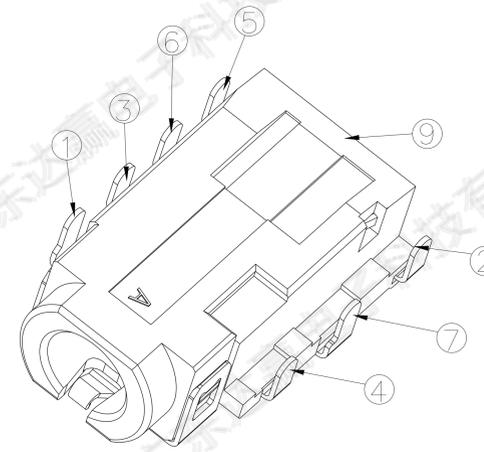




MODEL NO. :  
PJ-D3145Q-ABK7AS02L-RH

- (1) (2) (3) (4) (5) (6)  
 (1) Series no.  
 (2) Schematic type: A  
 (3) Housing color:  
 BK7=Black  
 (4) Terminal plating:  
 AS02=Plating Gold Flash.  
 (5) Packing mode:L=Reel packing  
 (6) Environmental requirements:  
 RH=RoHS 2.0 + Halogen Free

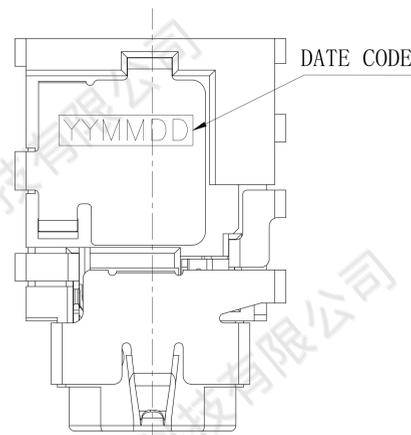

SPECIFICATION:

1. Electrical characteristics
  - 1-1. Current rating: DC 0.5A max.
  - 1-2. Voltage rating: DC 30V.
  - 1-3. Contact resistance: 50mΩ max.
  - 1-4. Insulation resistance: 100MΩ min. at 500V DC.
  - 1-5. Withstanding voltage: 500V AC for 1 minute.
2. Mechanical characteristics
  - 2-1. Life test: 5000 cycles min.
  - 2-2. Mating force: 3~30N,  
Unmating force: 3~30N.

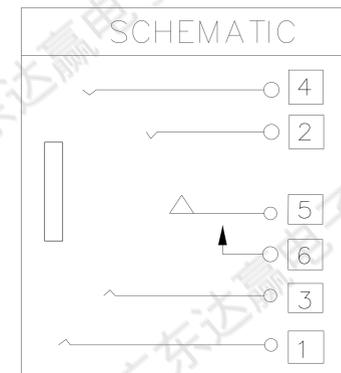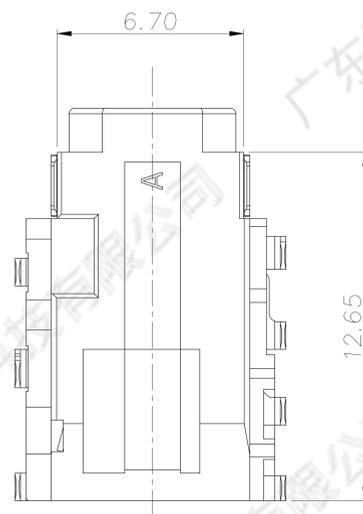

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
9	Housing	1	PA10T R630NH UL94-0	Black
8	Insulator	1	PA10T R630NH UL94-0	Black
6	Shunt terminal [6]	1	C5210-EH, 0.20t	Gold Flash On Contact And Solder Tail Area, All over 50u" Min Nickel Plated
5	Transfer Spring [5]	1	C5210-EH, 0.20t	
7	Shell	1	C5210-EH, 0.20t	50u" Min Nickel Plated
4	Ring spring [4]	1	C5210-EH, 0.20t	Gold Flash On Contact Area, 80u" Min matte tin Plating on Solder Tail Area,
3	Ring spring [3]	1	C5210-EH, 0.20t	
2	Tip spring [2]	1	C5210-EH, 0.20t	All over 50u" Min Nickel Plated
1	Earth spring [1]	1	C5210-EH, 0.20t	

ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	SCALE: 1:1	UNIT:mm	A4	SHEET:1 of 1	CUSTOMER DRAWING	TITLE:	MODEL NO.	FILE NO.
	A-0	2018. 09. 29	NEW	罗振强	李海鸥	Angle ±1.5° .x ±0.35 .xx ±0.25 .xxx ±0.15	DESIGN 罗振强 2018. 09. 29				广东达赢电子科技有限公司 Guangdong DaYing Electronic Technology Co., Ltd.	Ø3.5mm PHONE JACK	PJ-D3145Q-ABK7AS02L-RH	Q/DY. QW-001A-0684