
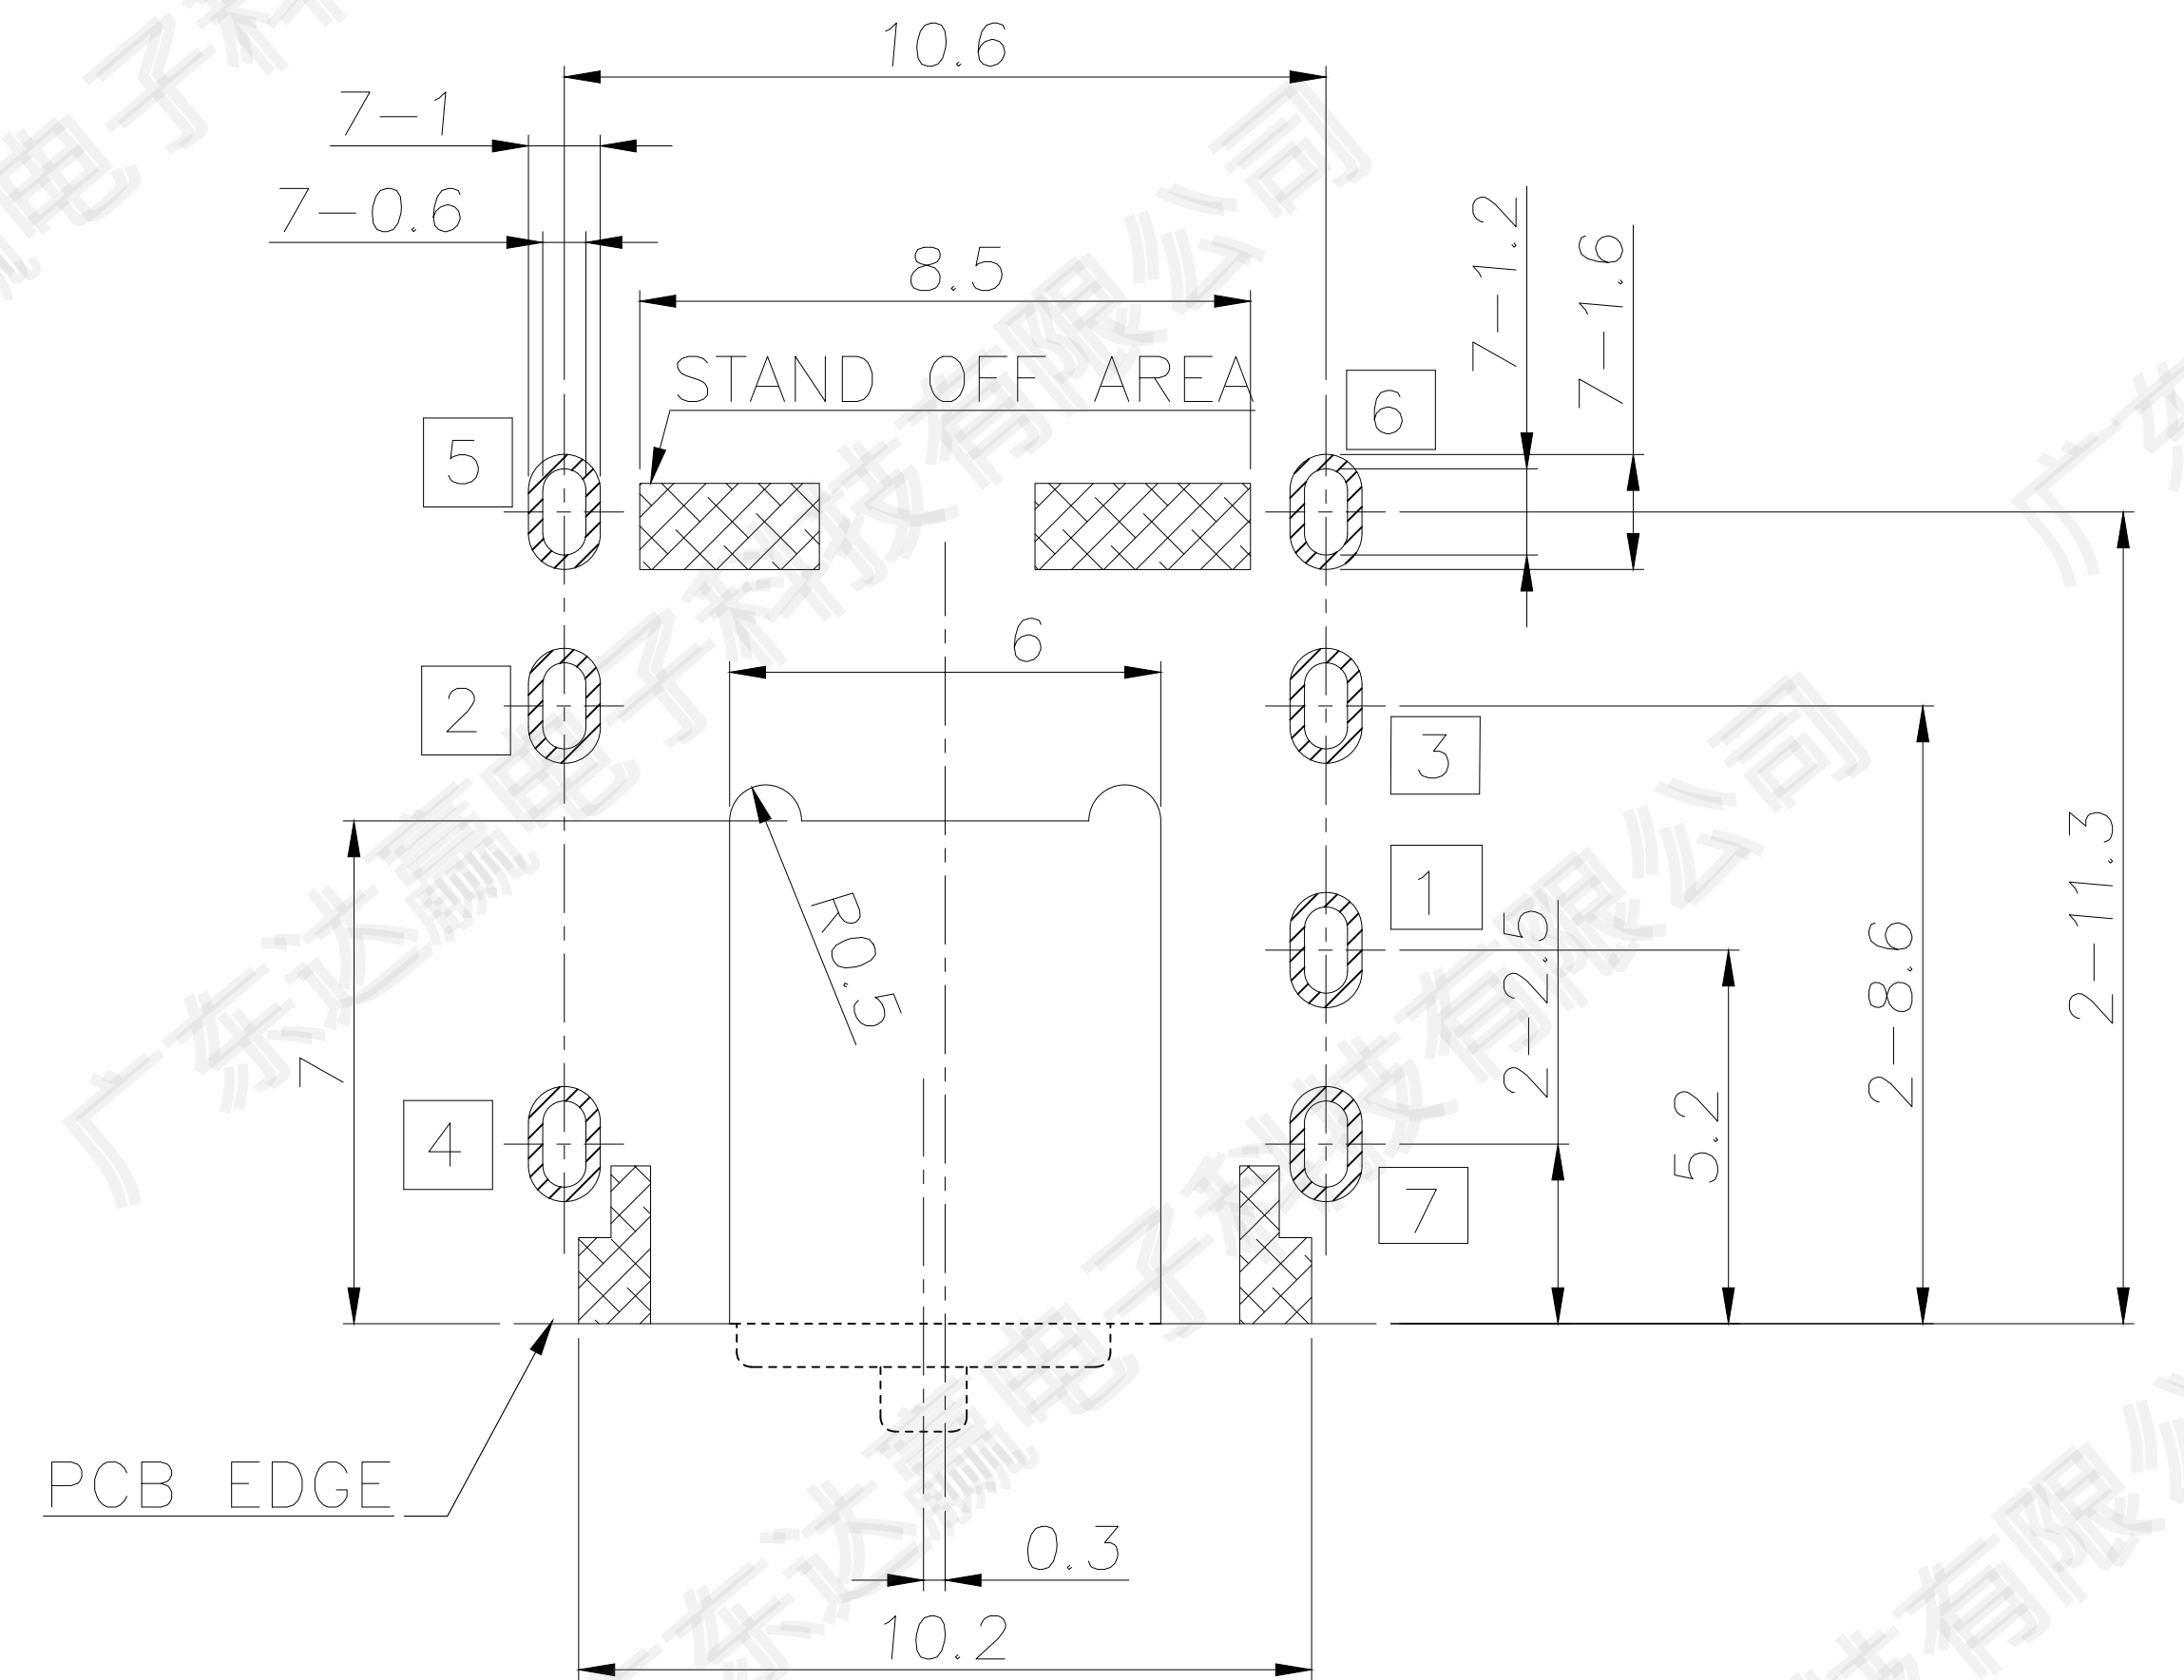
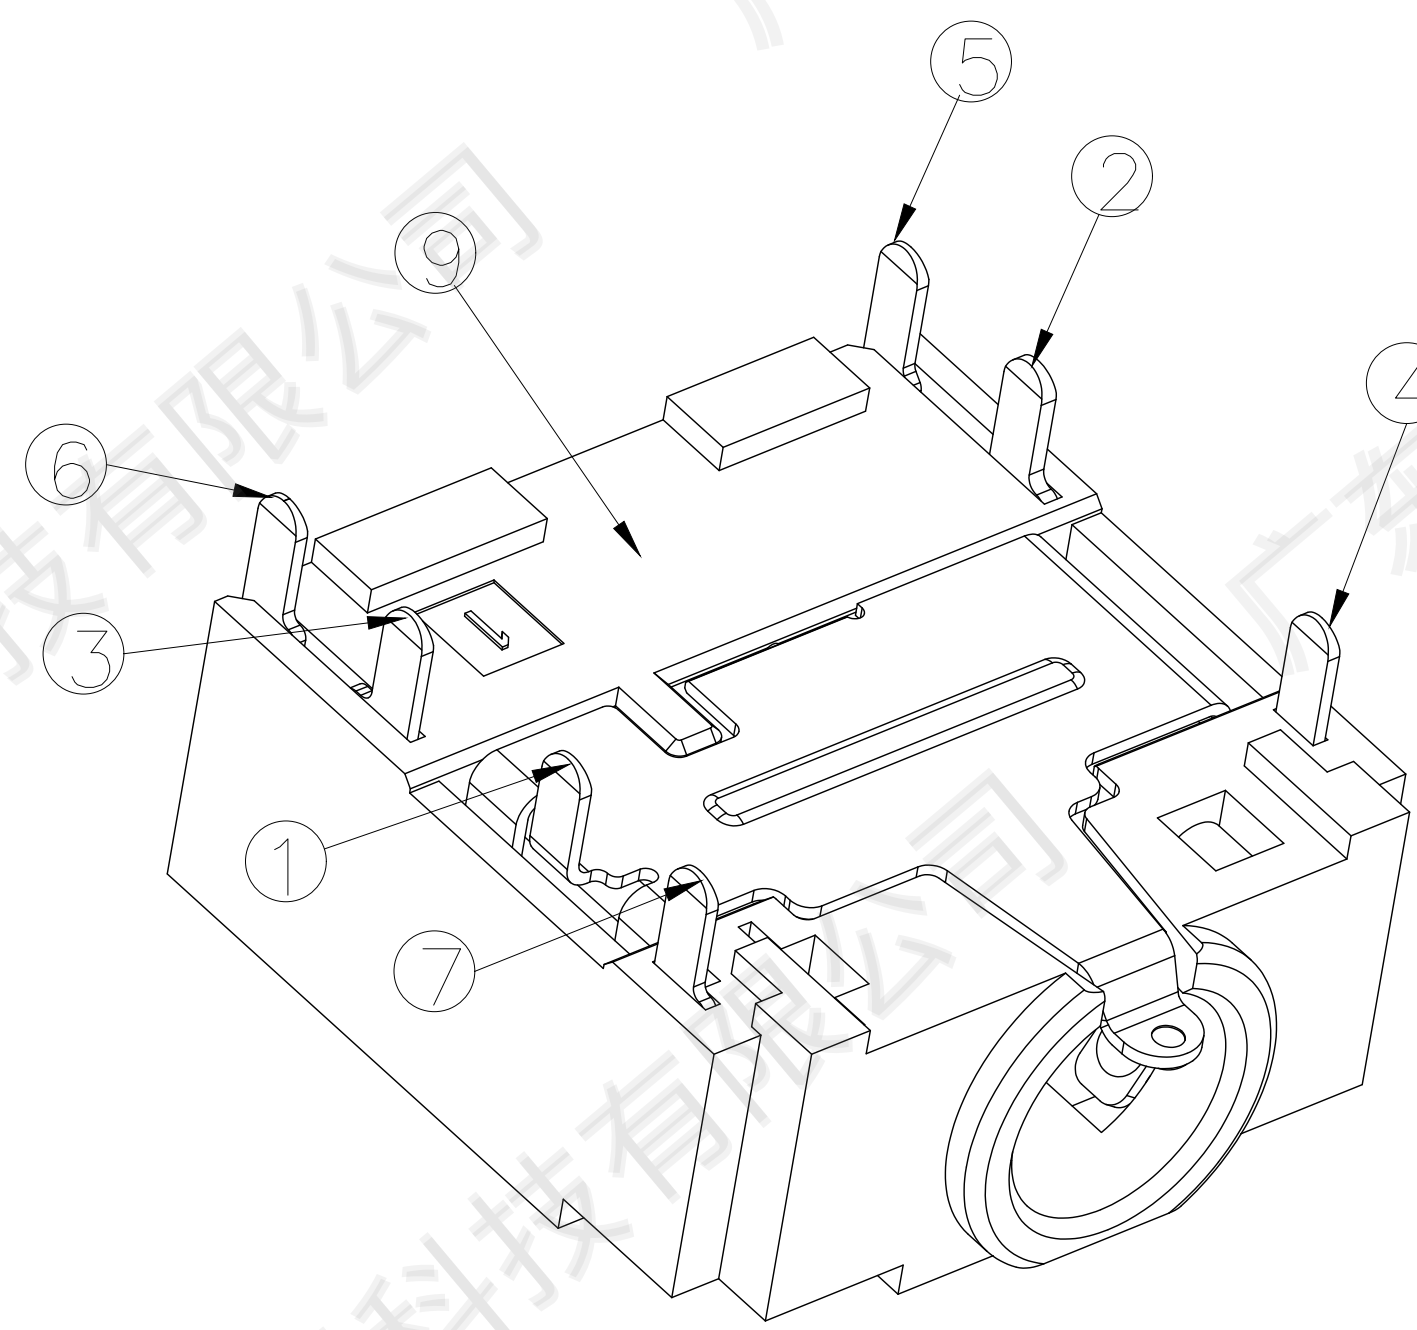
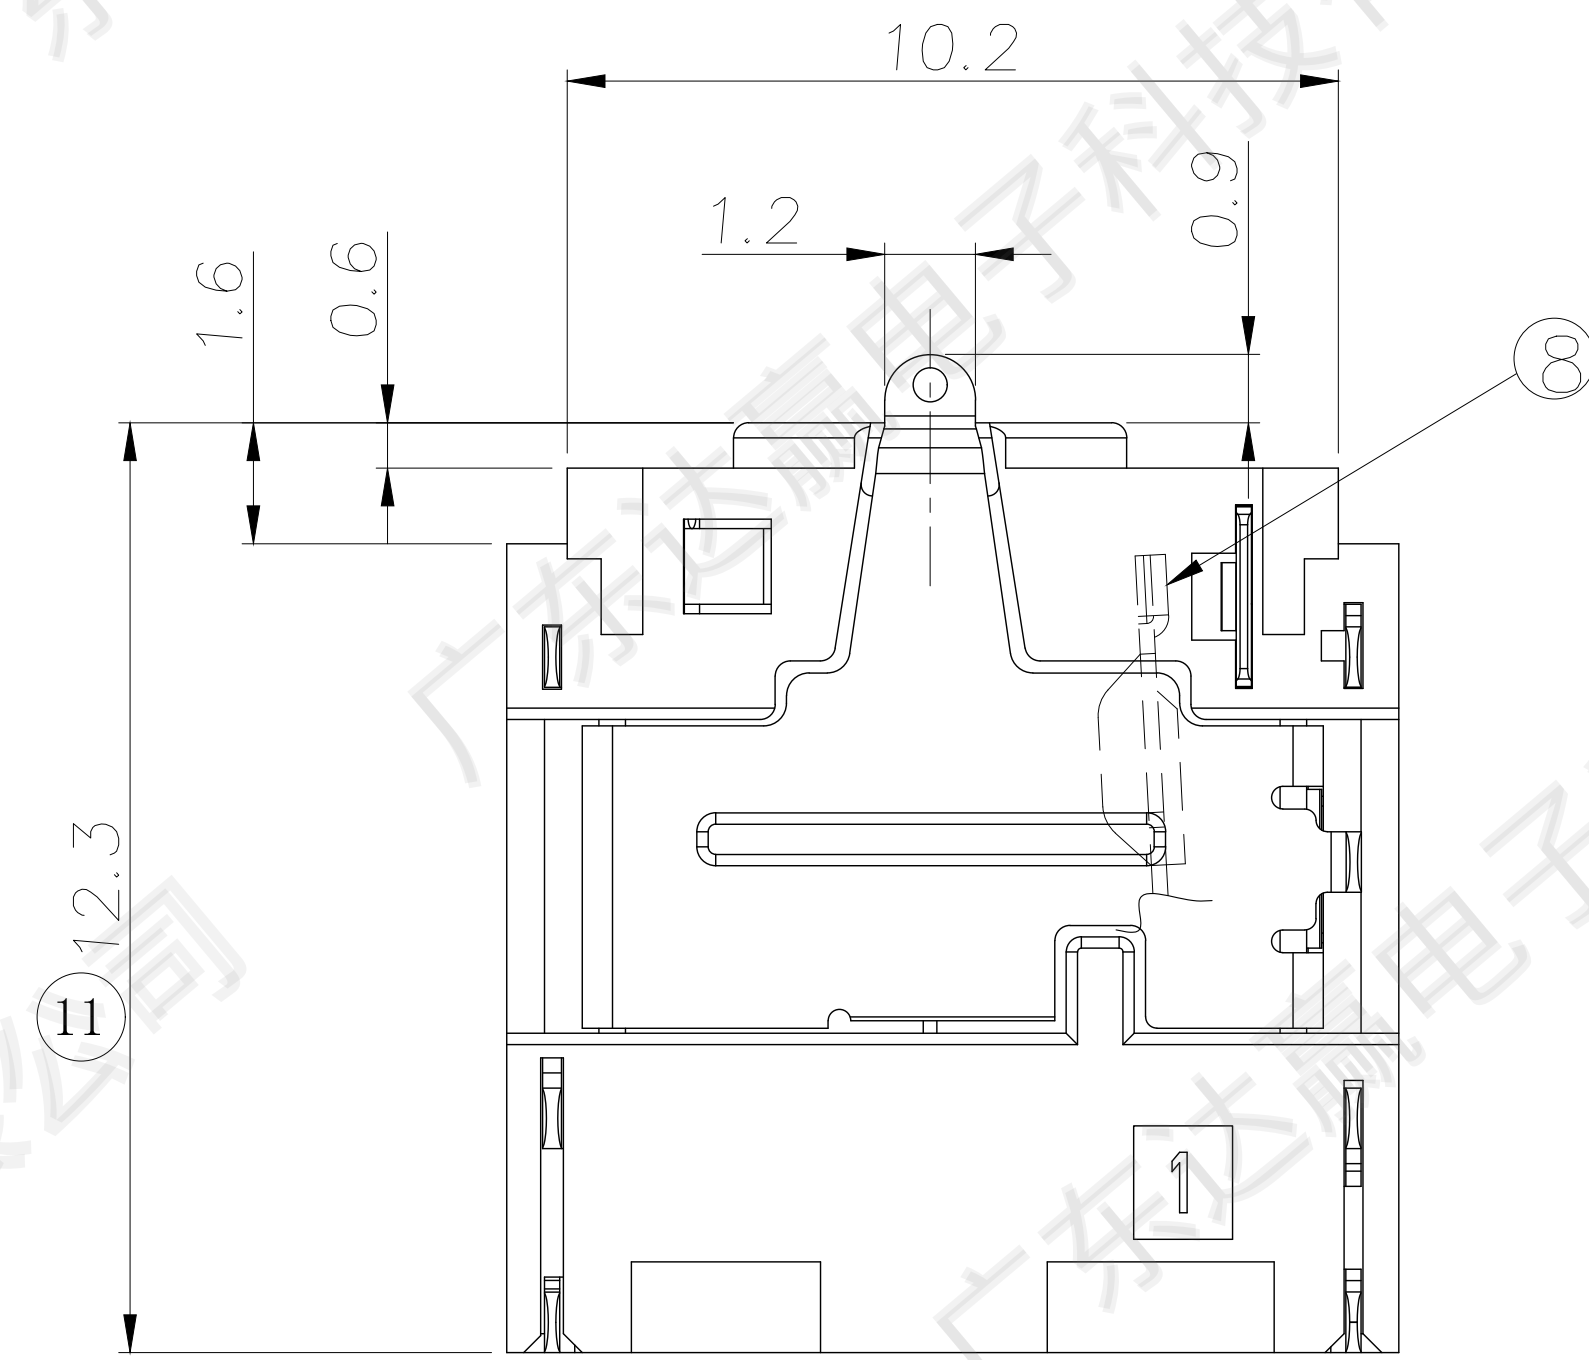
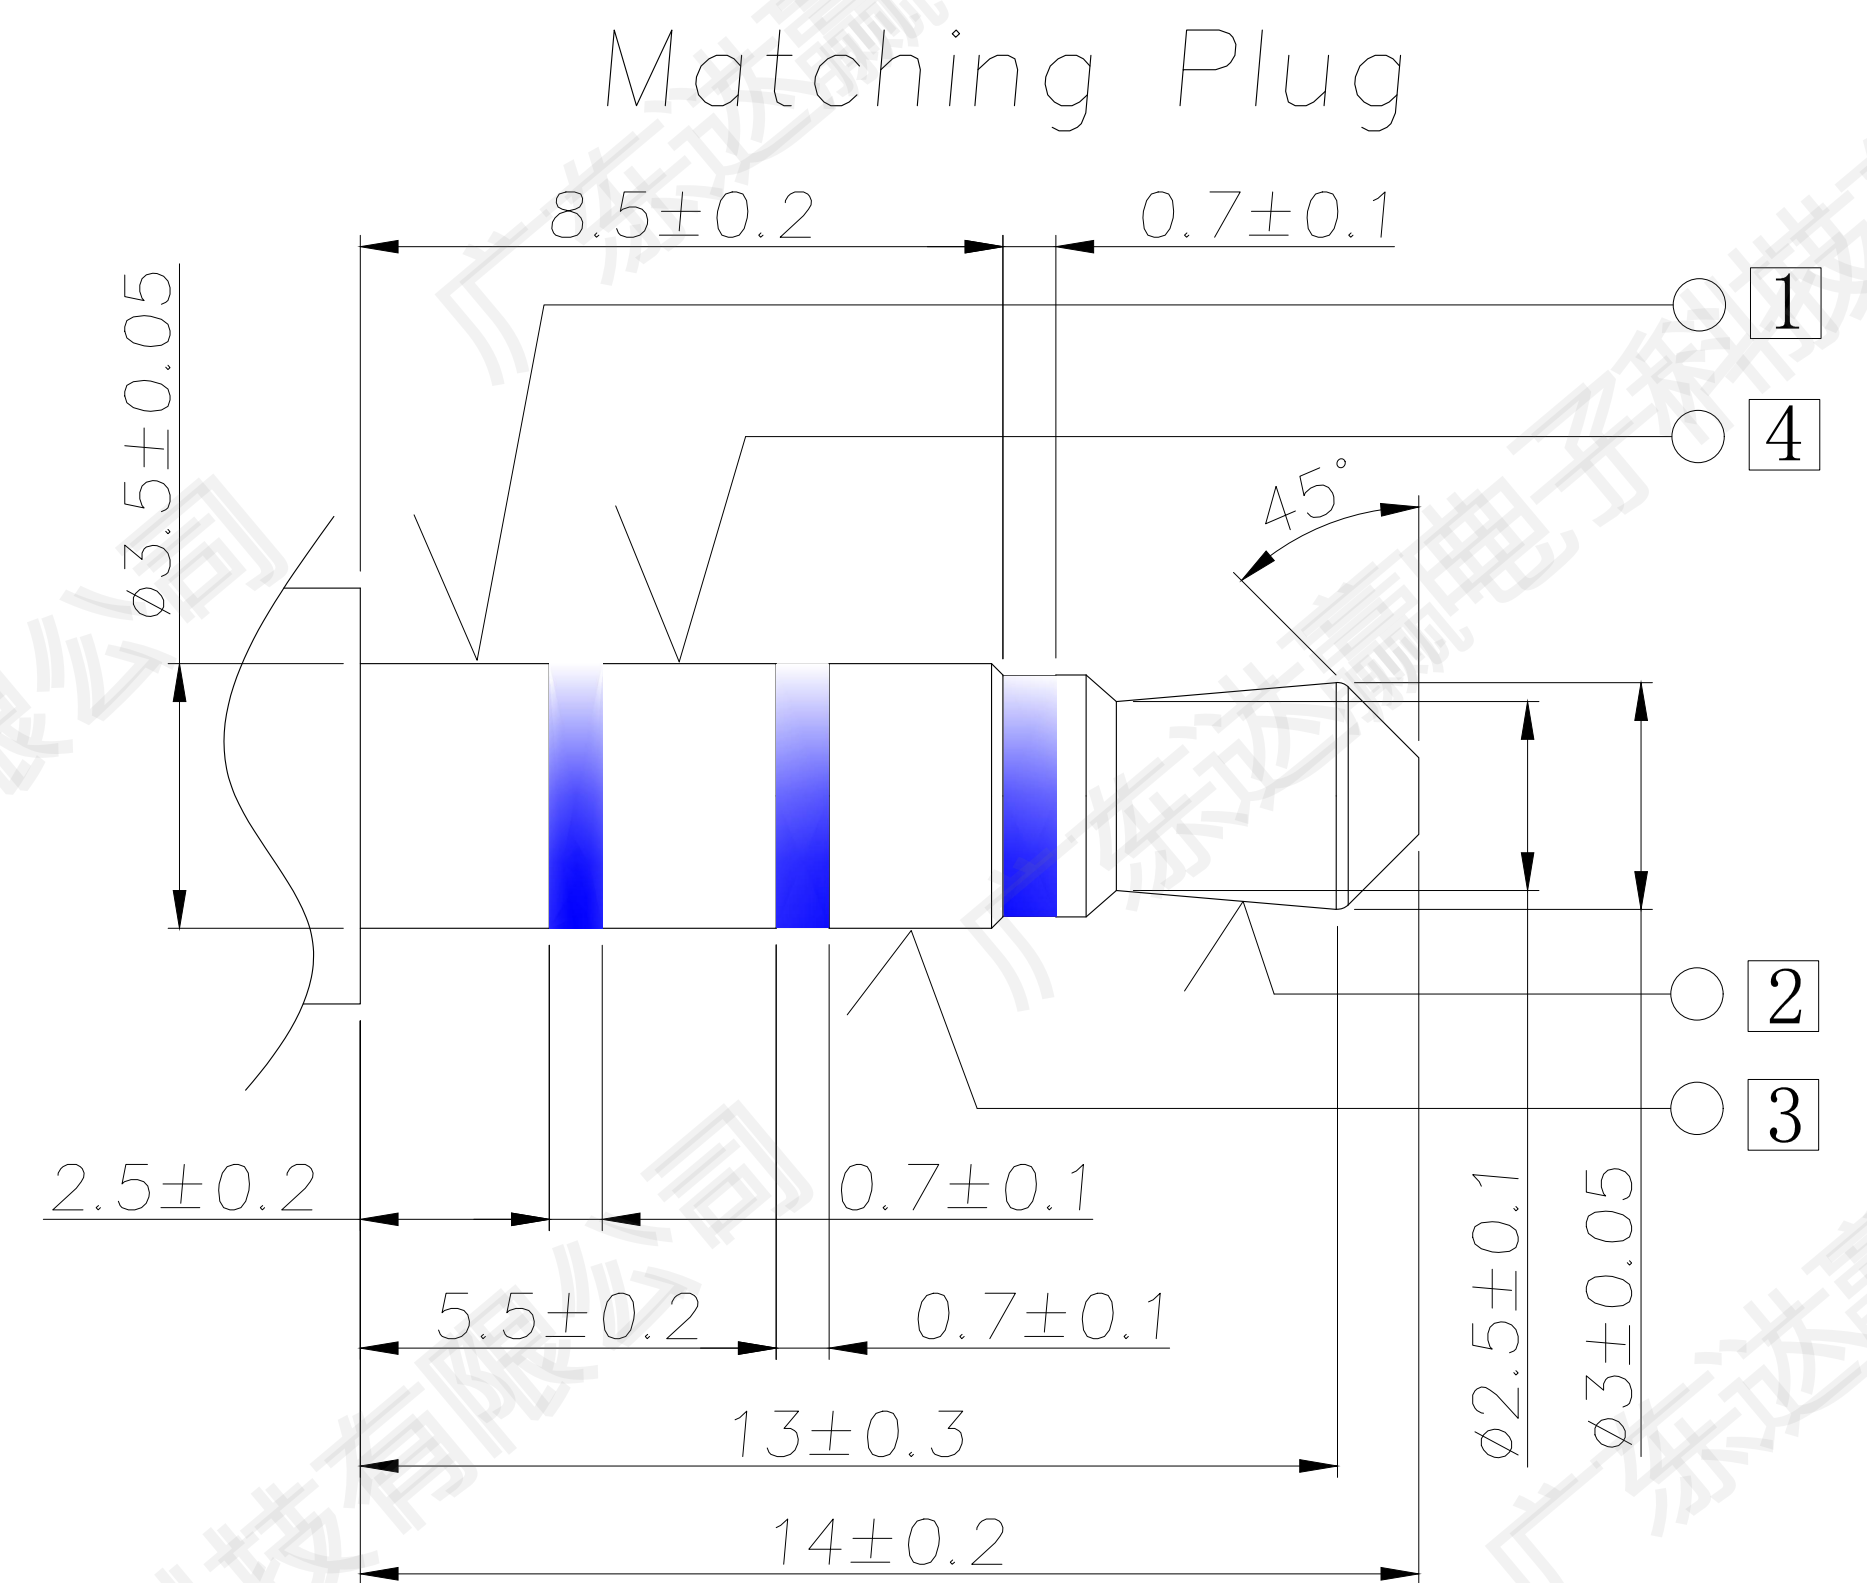
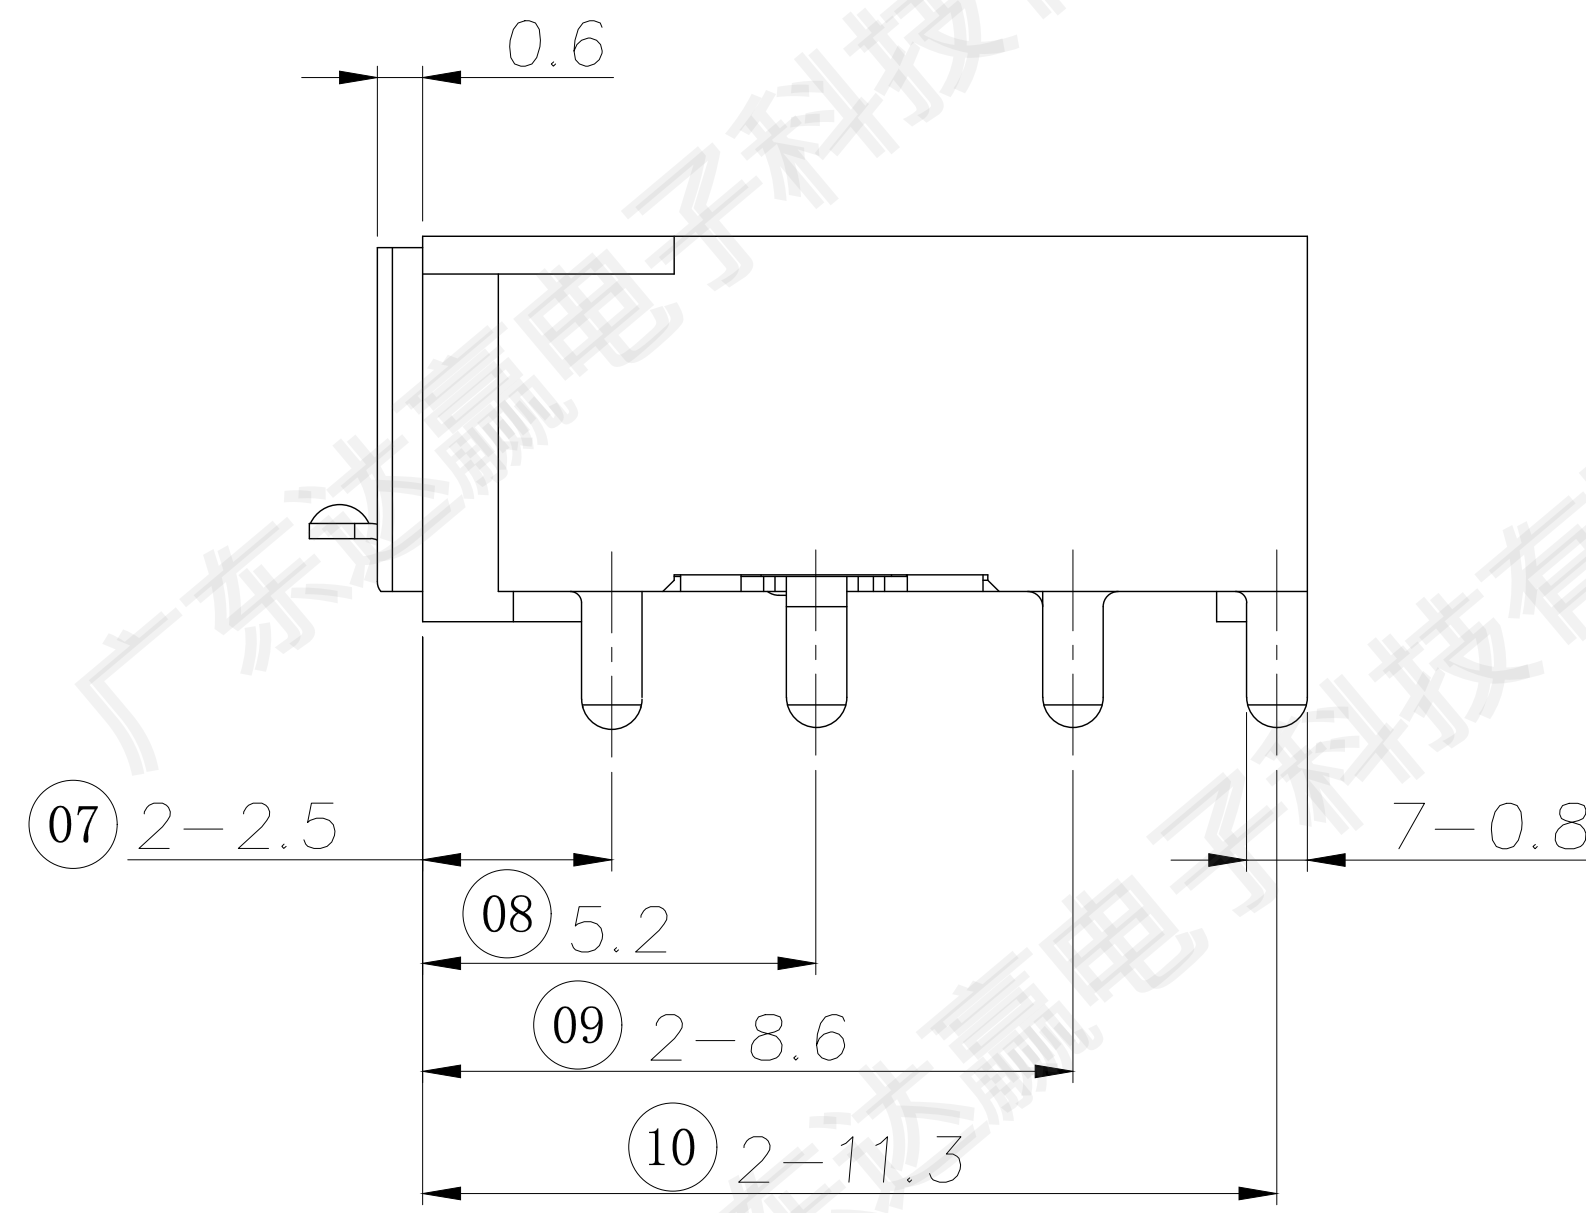
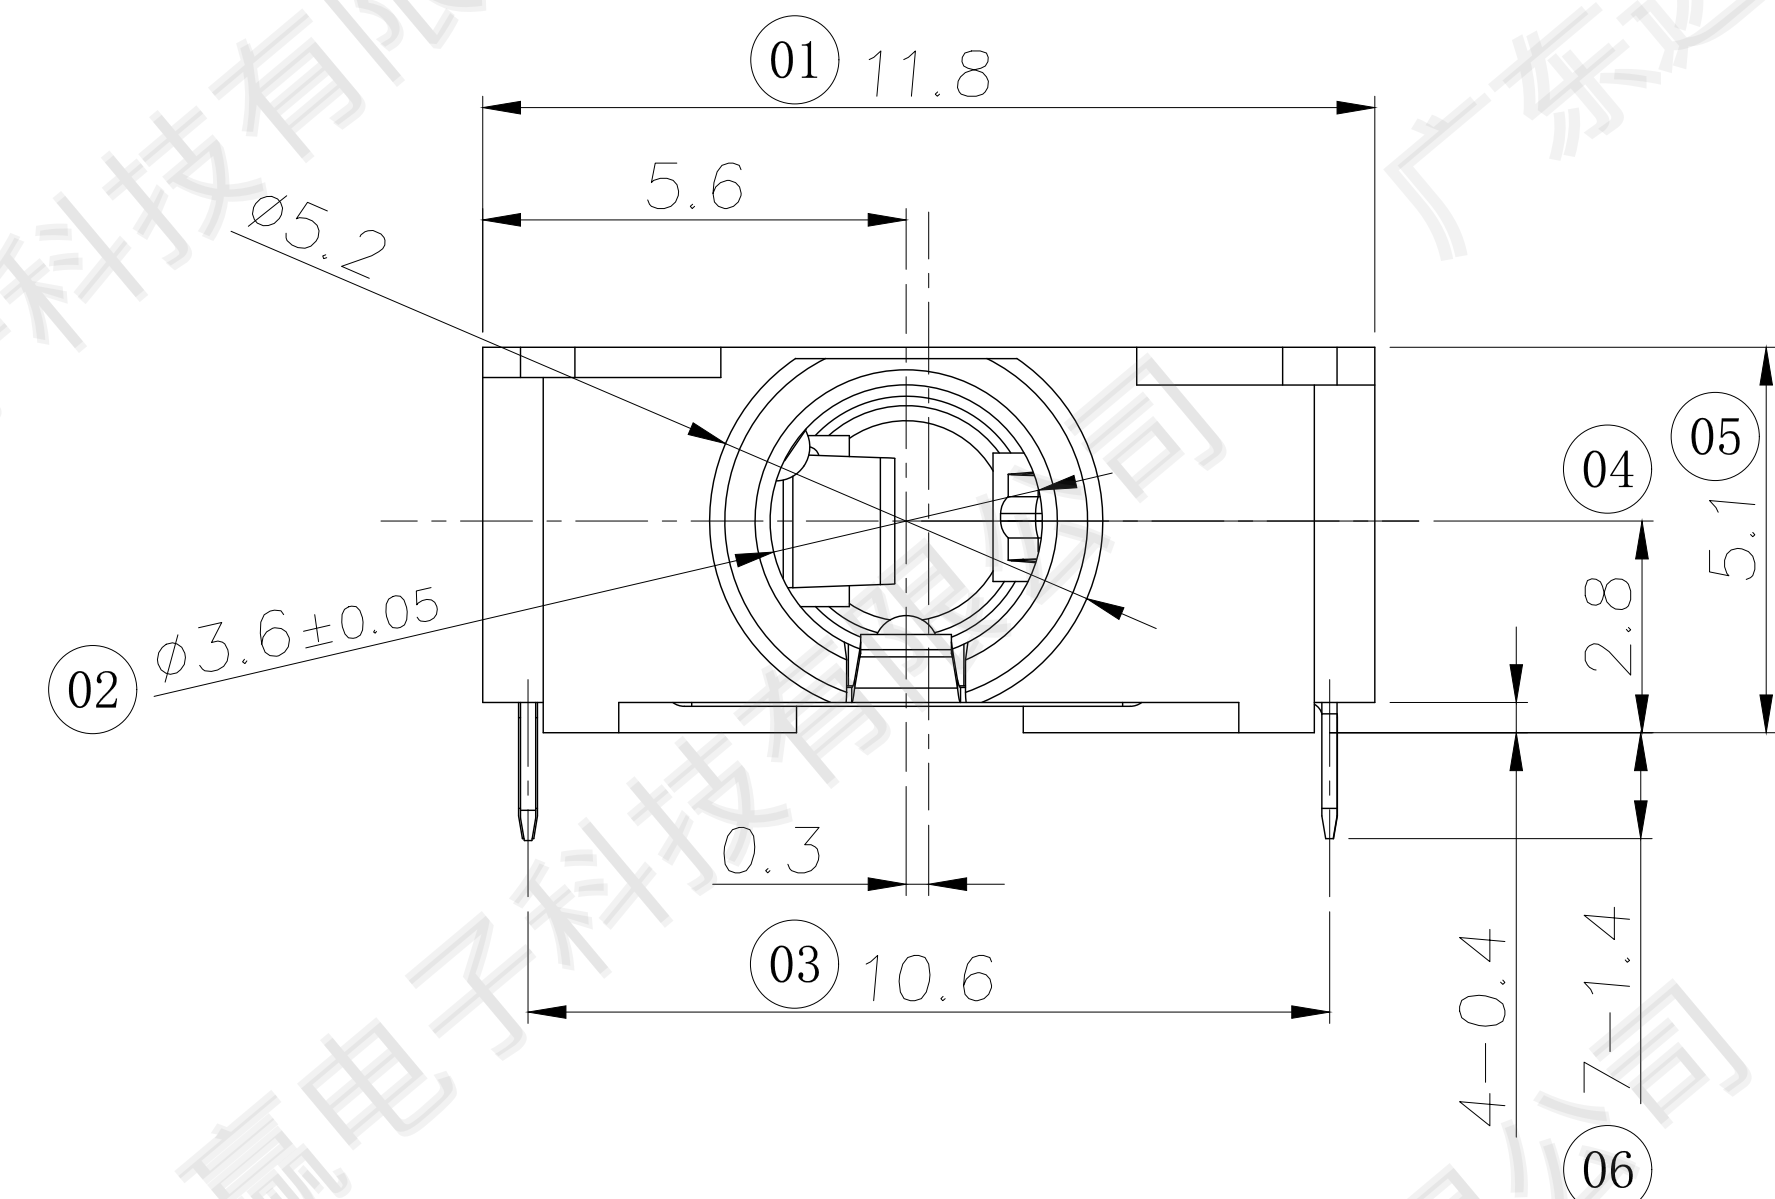


MODEL NO. :
PJ-D3238A-ABK7AS02L-RH
(1) (2) (3) (4) (5) (6)
(1) Series no.
(2) Schematic type: A, B, C
(3) Housing color:
BK7=Black
(4) Terminal plating:
AS02=Plating Tin/AU 1" min.
(5) Packing mode:L=Reel packing
(6) Environmental requirements:
RH=RoHS 2.0 + HF 无卤

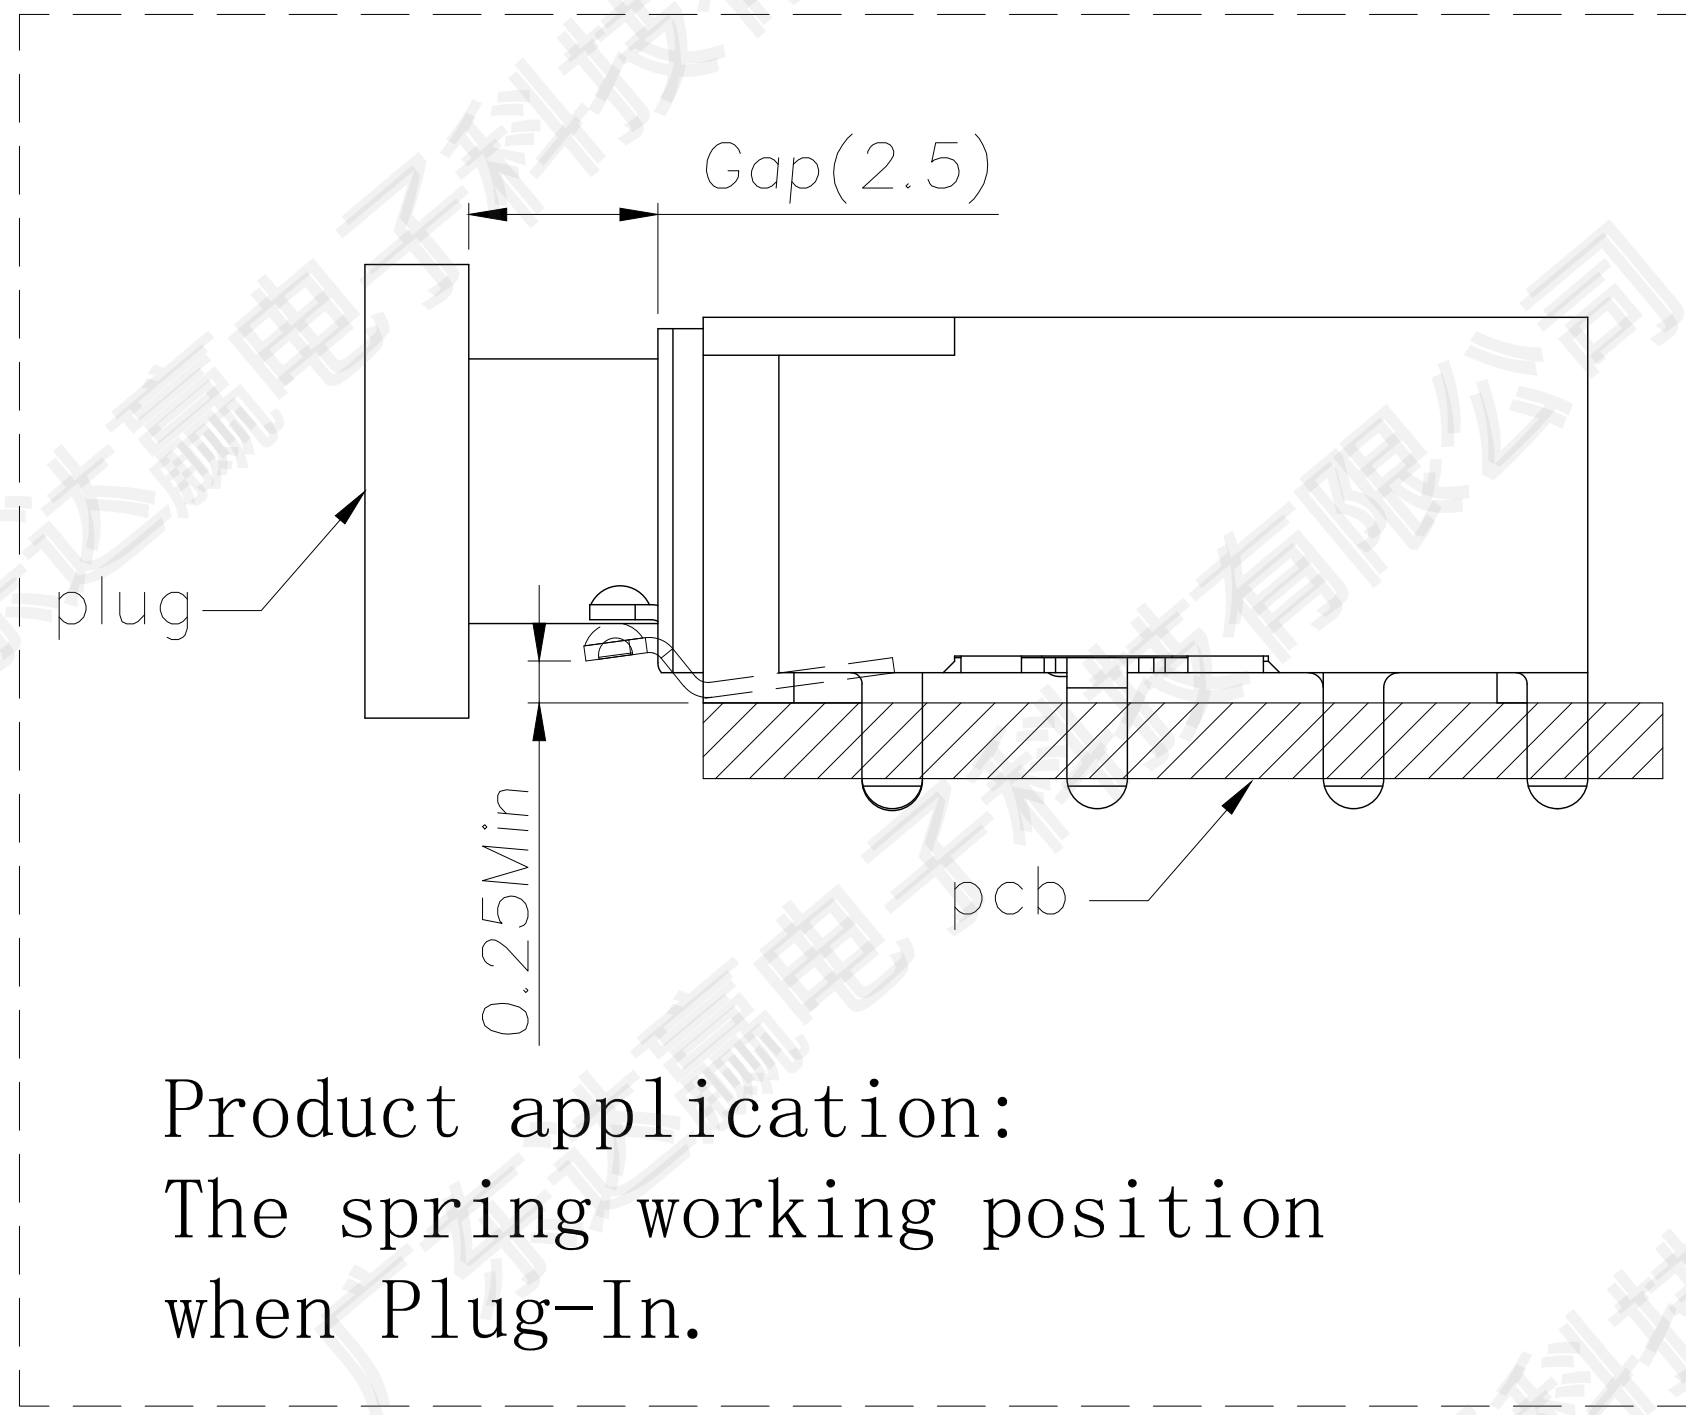

SPECIFICATION:

1. Electrical characteristics



- 1-1. Current rating: DC 1.5A max.
- 1-2. Voltage rating: DC 12V.
- 1-3. Contact resistance: 50mΩ max.
- 1-4. Insulation resistance: 100MΩ min. at 500V DC.
- 1-5. Withstanding voltage: 500V AC for 1 minute.

2. Mechanical characteristics

- 2-1. Life test: 5000 cycles min,
- 2-2. Mating force: 4~30N,
Unmating force: 4~30N.

3. Salt spray test time: 24 hours min.

4. Sign"xx" is importance dimension.

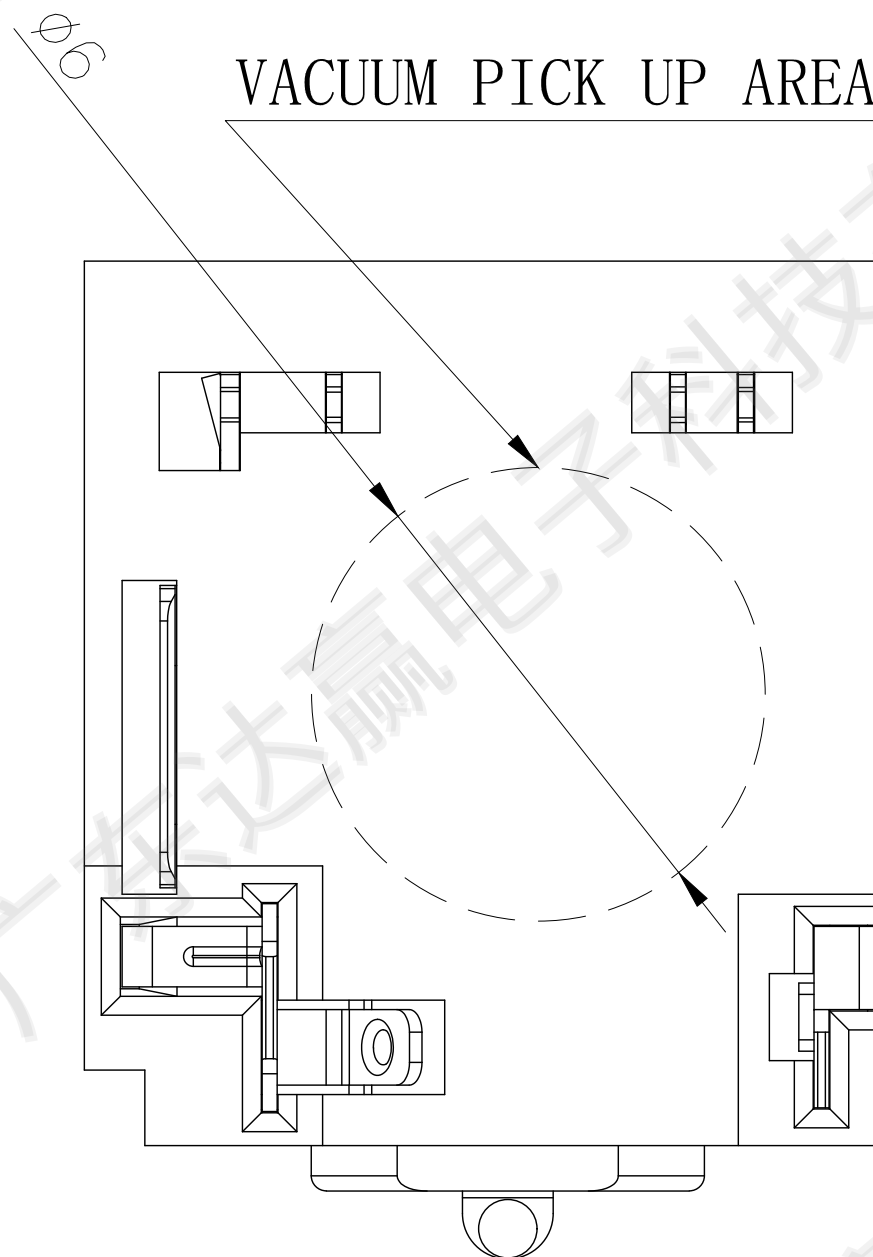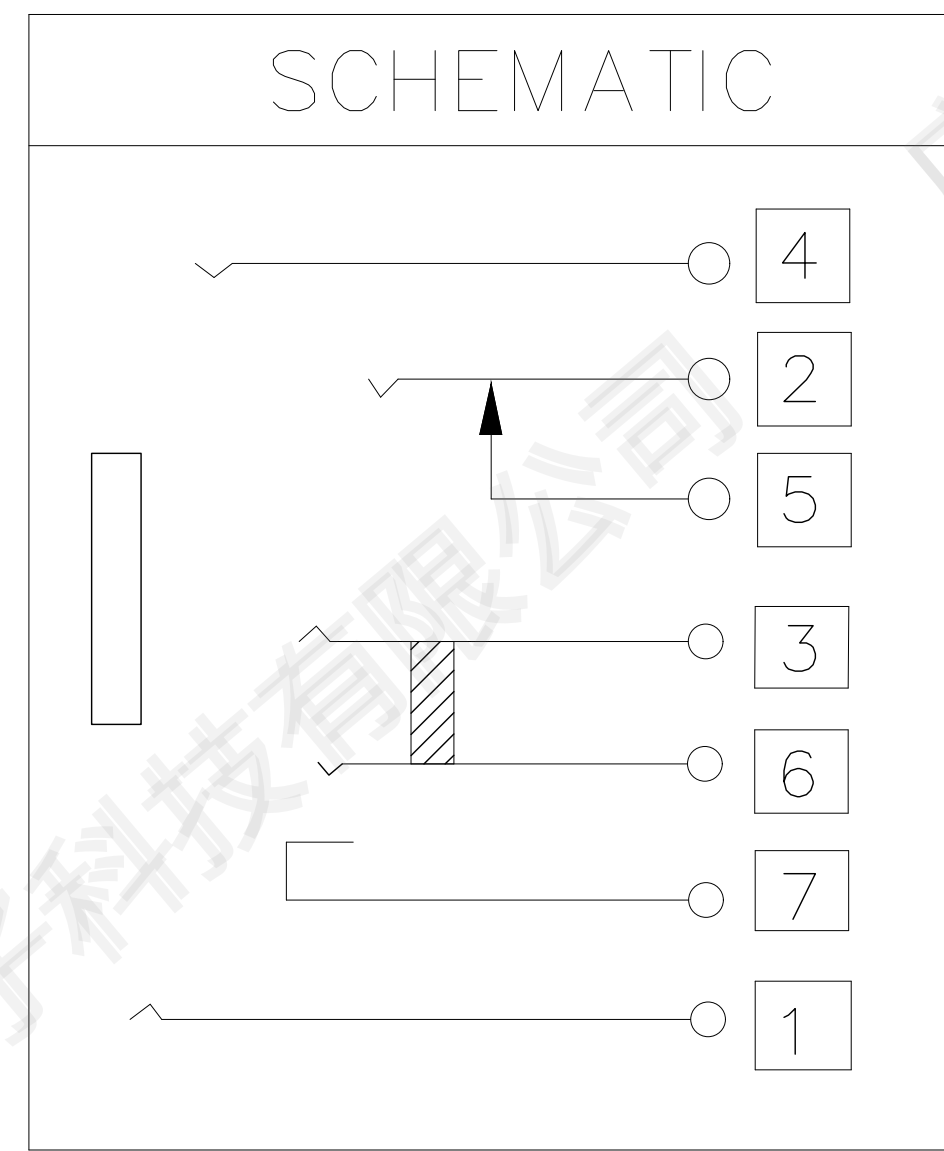

9	Housing	1	HIGH TEMPERATURE PLASTIC	Black
8	Insulator	1	HIGH TEMPERATURE PLASTIC	Black
7	Shunt terminal	1	Phosphor bronze, 0.20t	Gold Plated .
5	Shunt terminal	1	Phosphor bronze, 0.20t	
6	Transfer Spring	1	Phosphor bronze, 0.20t	Gold Flash On Contact Area Tin Plating on Solder Tail Area , All over Nickel Plated
4	Ring spring	1	Phosphor bronze, 0.20t	
3	Ring spring	1	Phosphor bronze, 0.20t	
2	Tip spring	1	Phosphor bronze, 0.25t	
1	Earth spring	1	Phosphor bronze, 0.20t	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

						Angle	±2°	DESIGN	罗振强	2017. 07. 14		 广东达赢电子科技有限公司 <i>Up Win</i> Guangdong DaYing Electronic Technology Co., ltd.	
						10<L≤20	±0.3	CHECK				TITLE: Ø3.5mm PHONE JACK	
						5<L≤10	±0.25						MODEL NO. PJ-D3238A-ABK7AS02L-RH
—	A-0	2017. 07. 14	NEW	罗振强	李海鸥	L≤5	±0.20	APPROVAL					FILE NO. Q/DY. QW-001A-0569
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: 3:1	UNIT:mm	A4 	SHEET:1 of 1		