

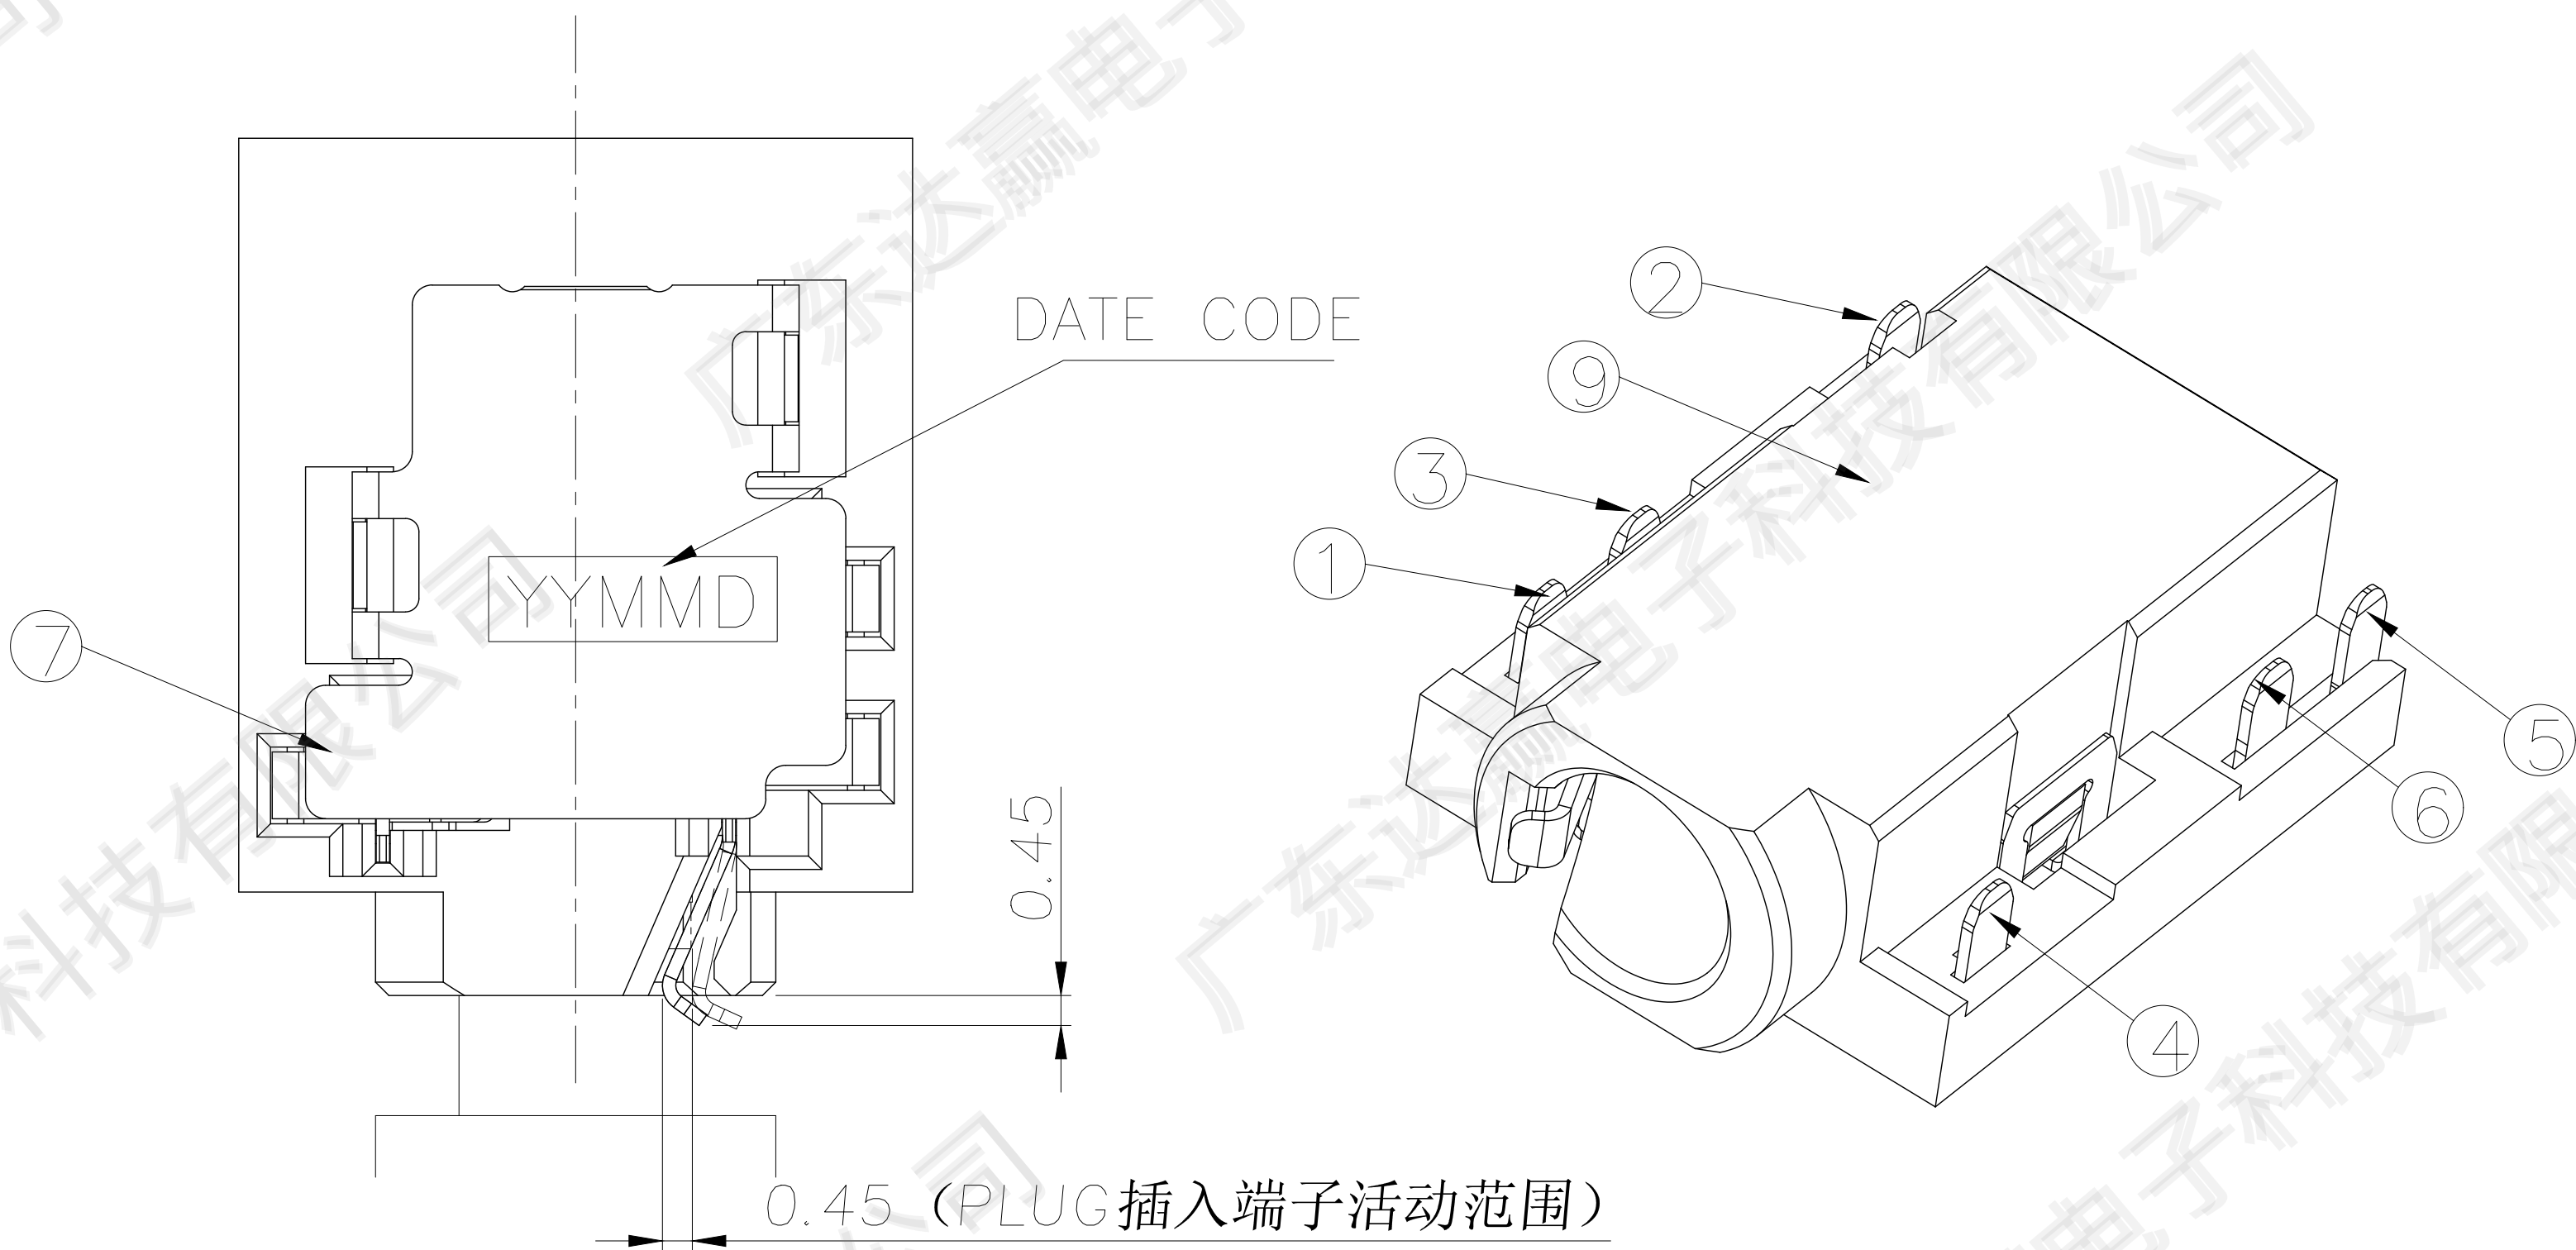
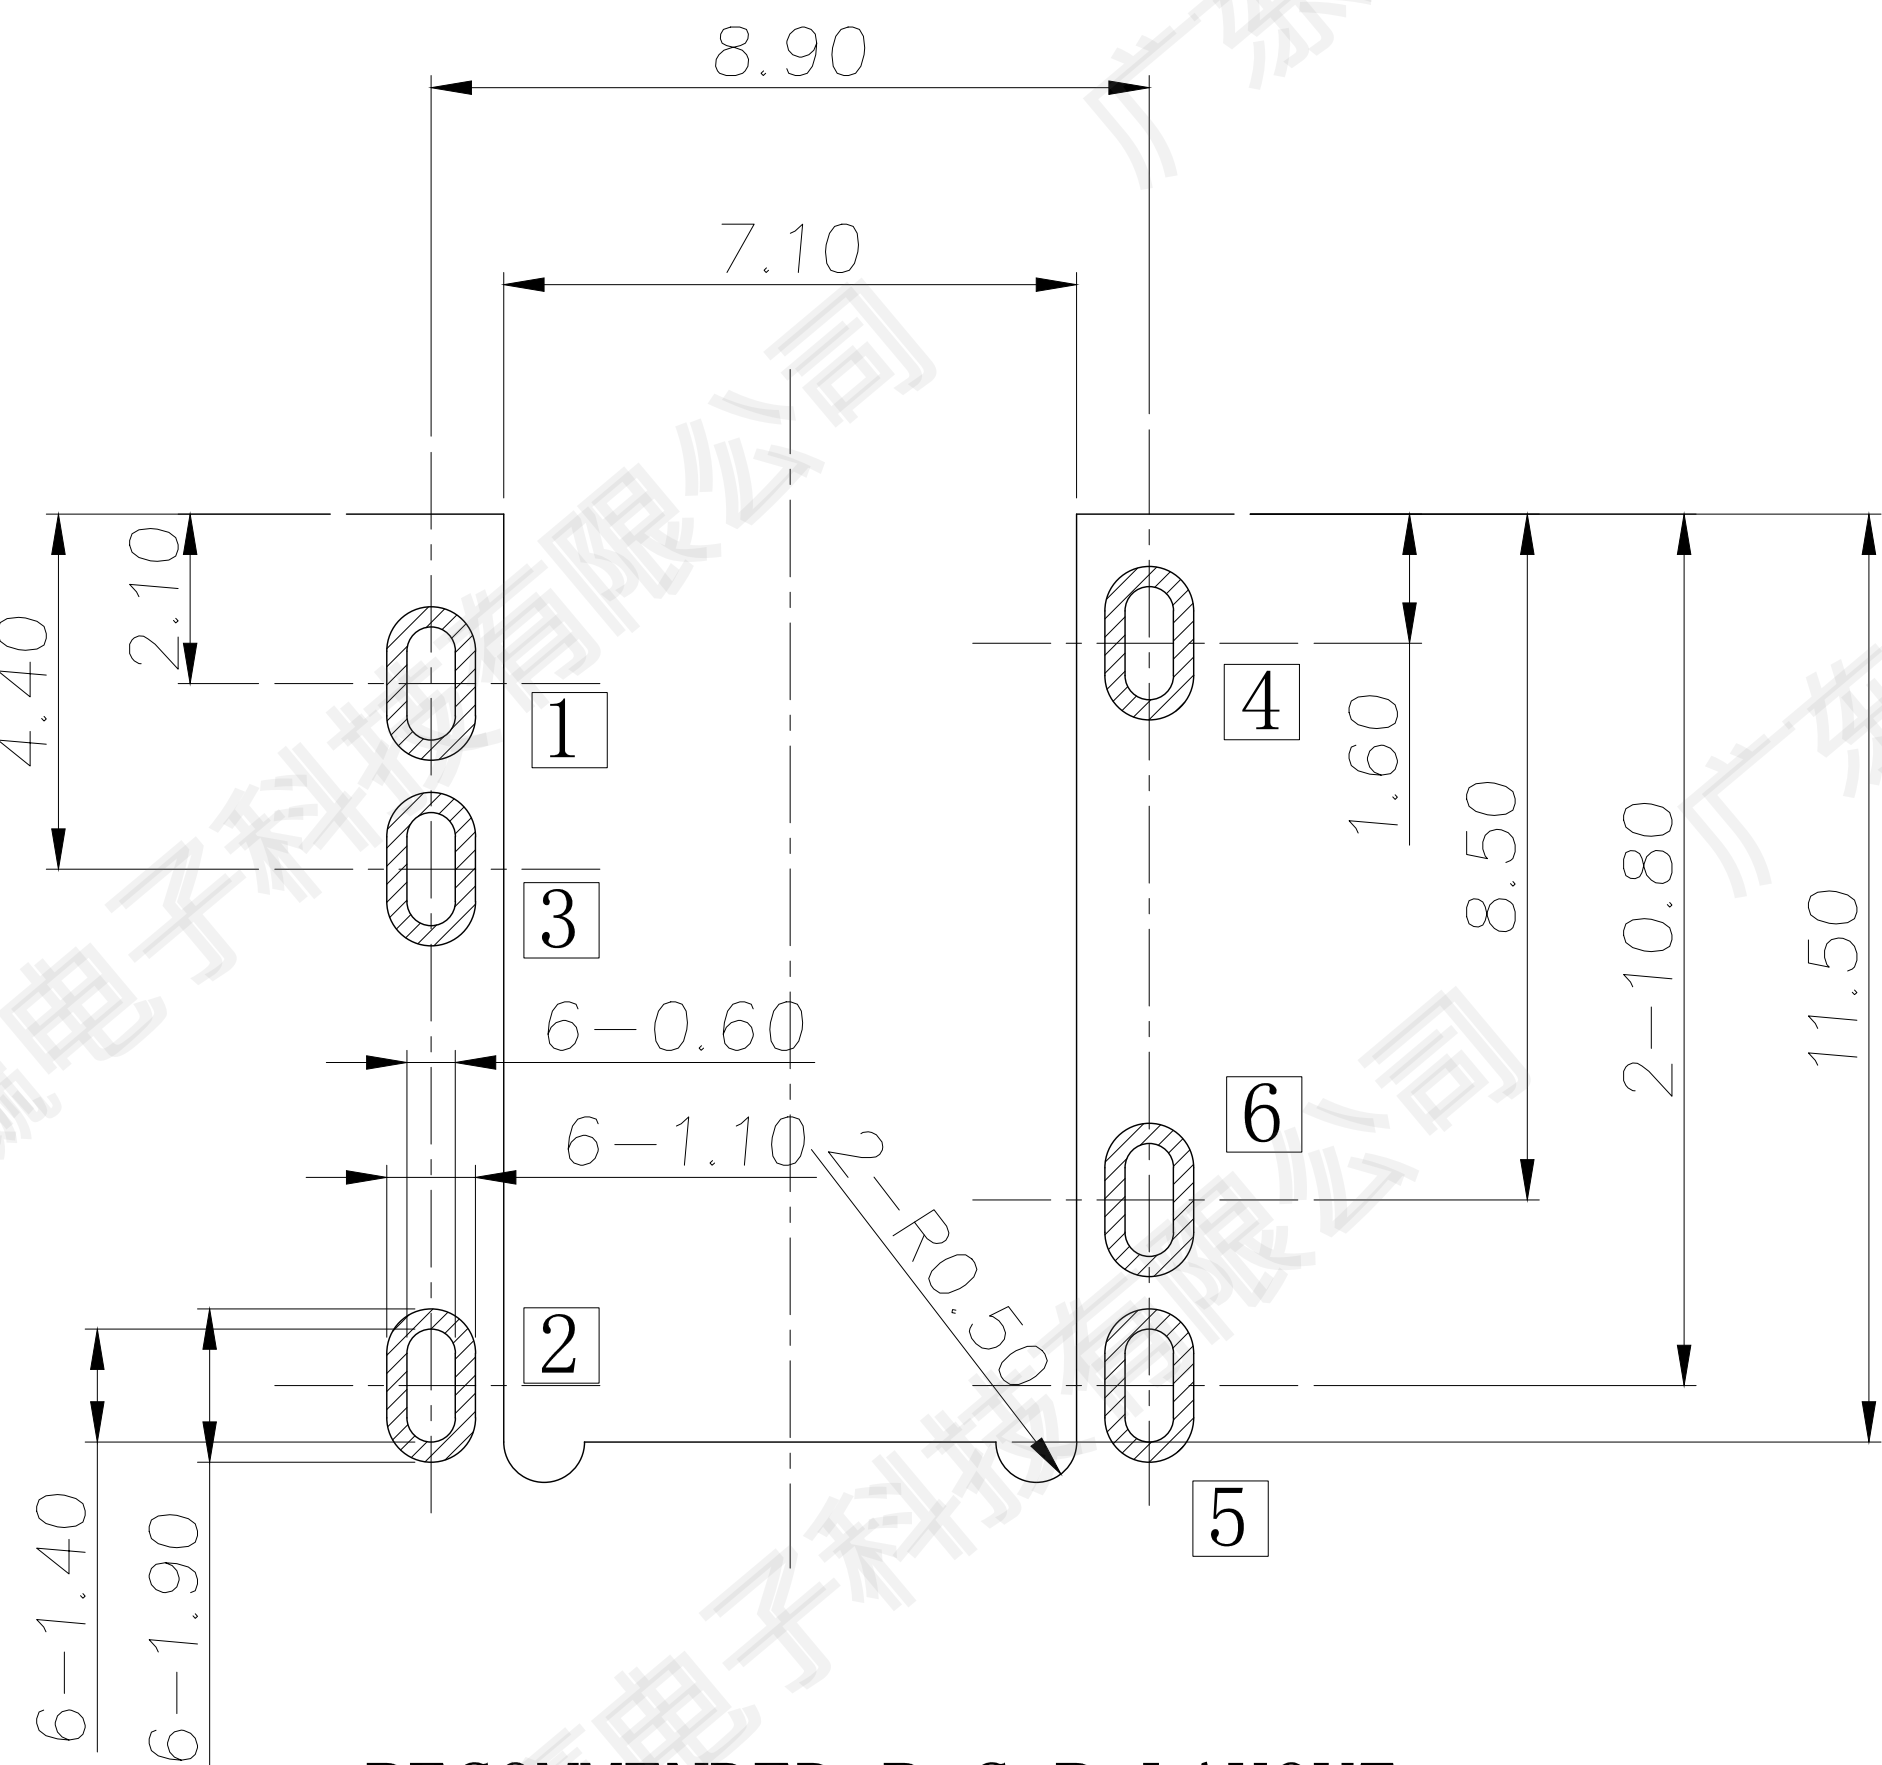
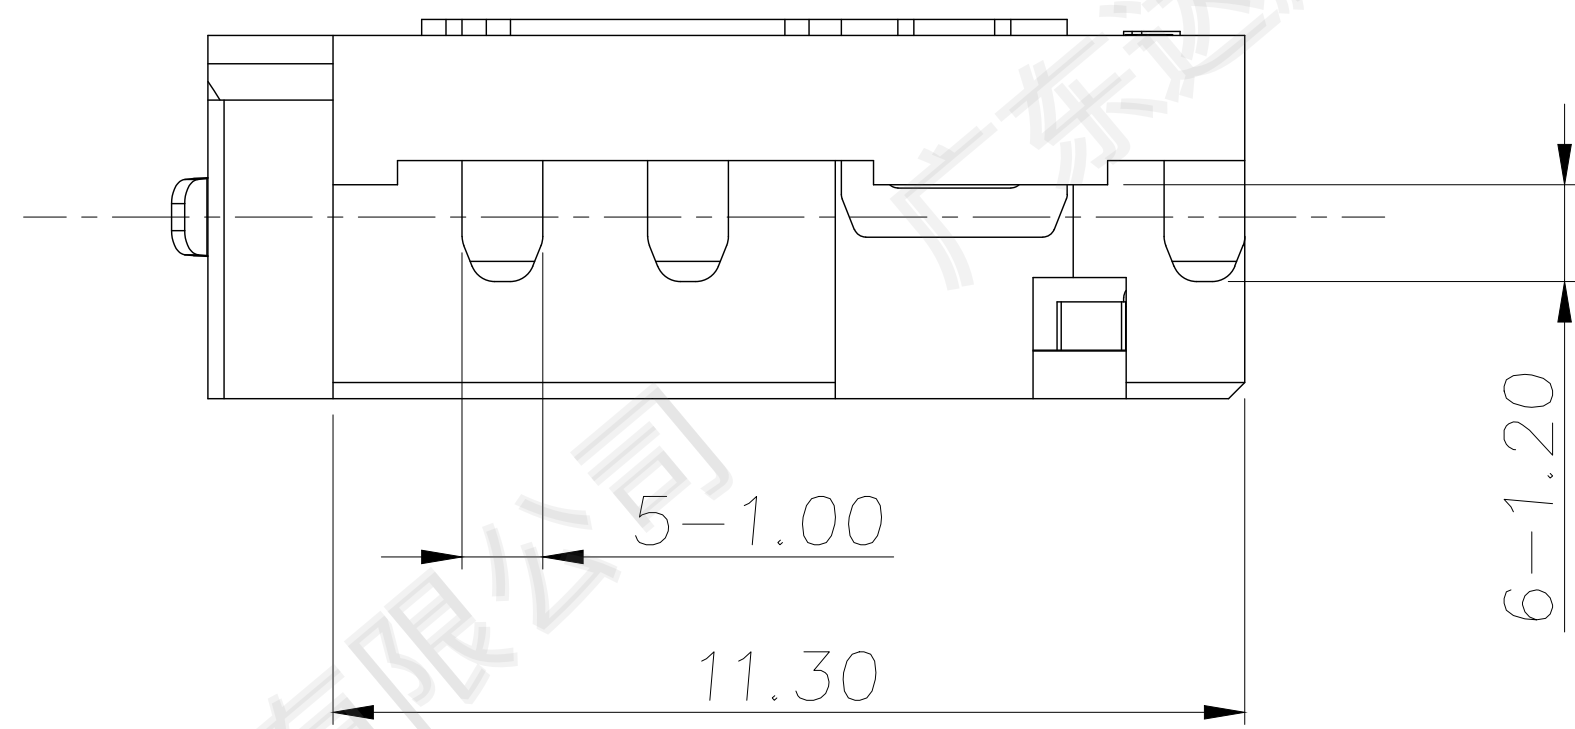
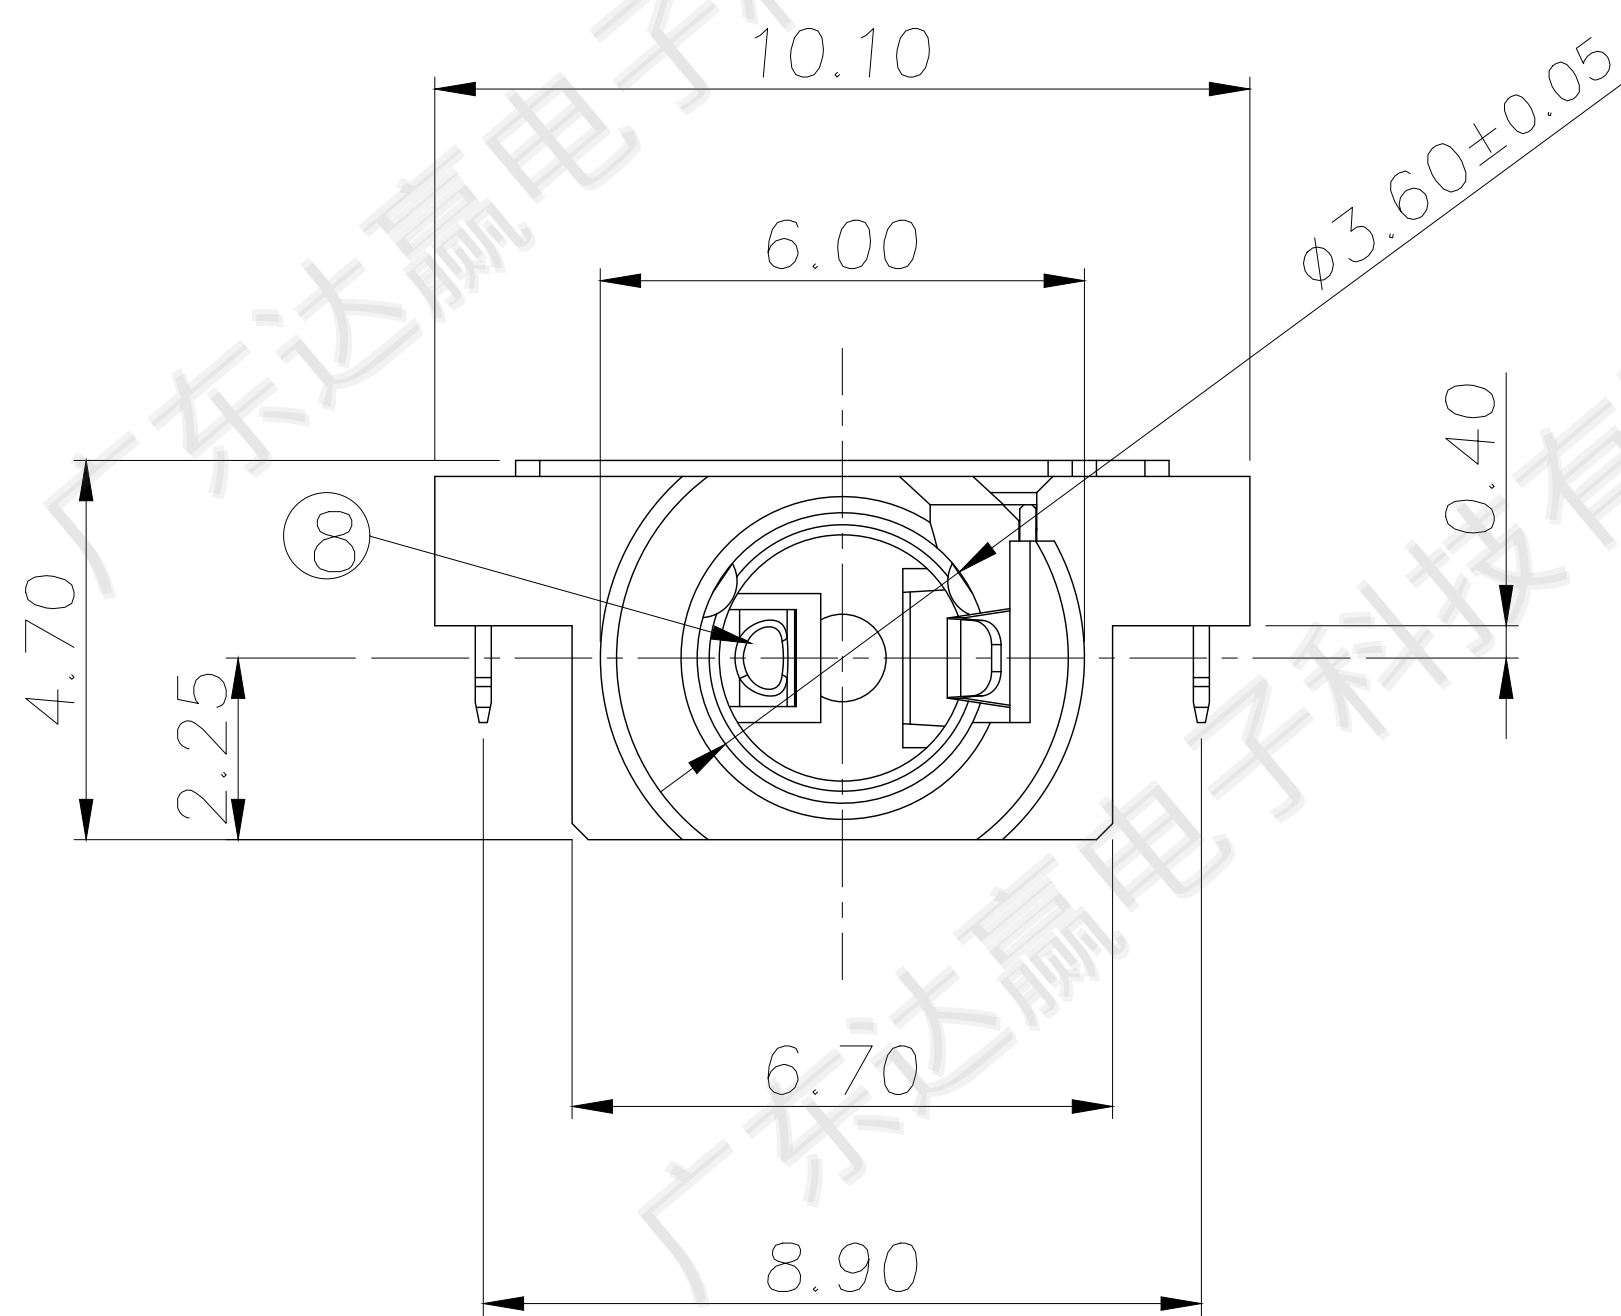




MODEL NO.:
PJ-D3228A-ABK7AU02L-RH
(1) (2)(3) (4)(5)(6)
(1) Series No.
(2) Schematic type: A,B,C
(3) Housing color:
BK7=Black
(4) Terminal plating:
AS02=Plating Au 1u" min.
(5) Packing mode:L=Reel packing
(6) Environmental requirements:
RH=RoHS 2.0 + Halogen free

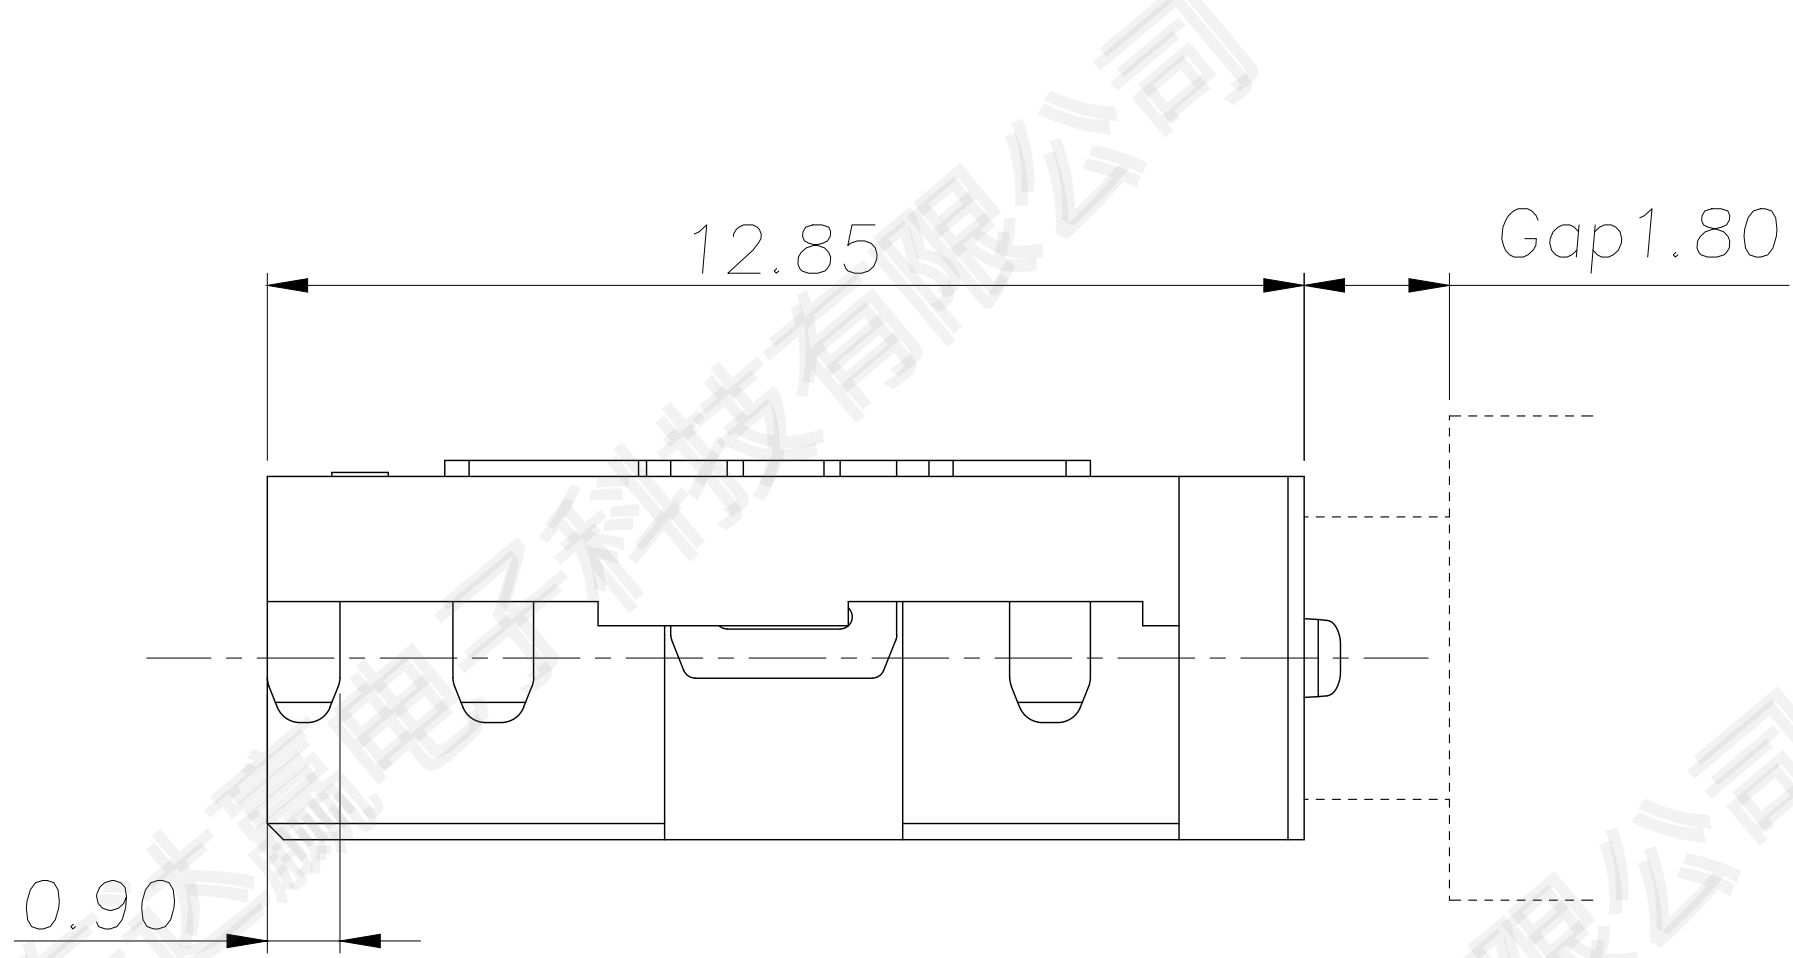

Product application:
The spring working position
when Plug-In.

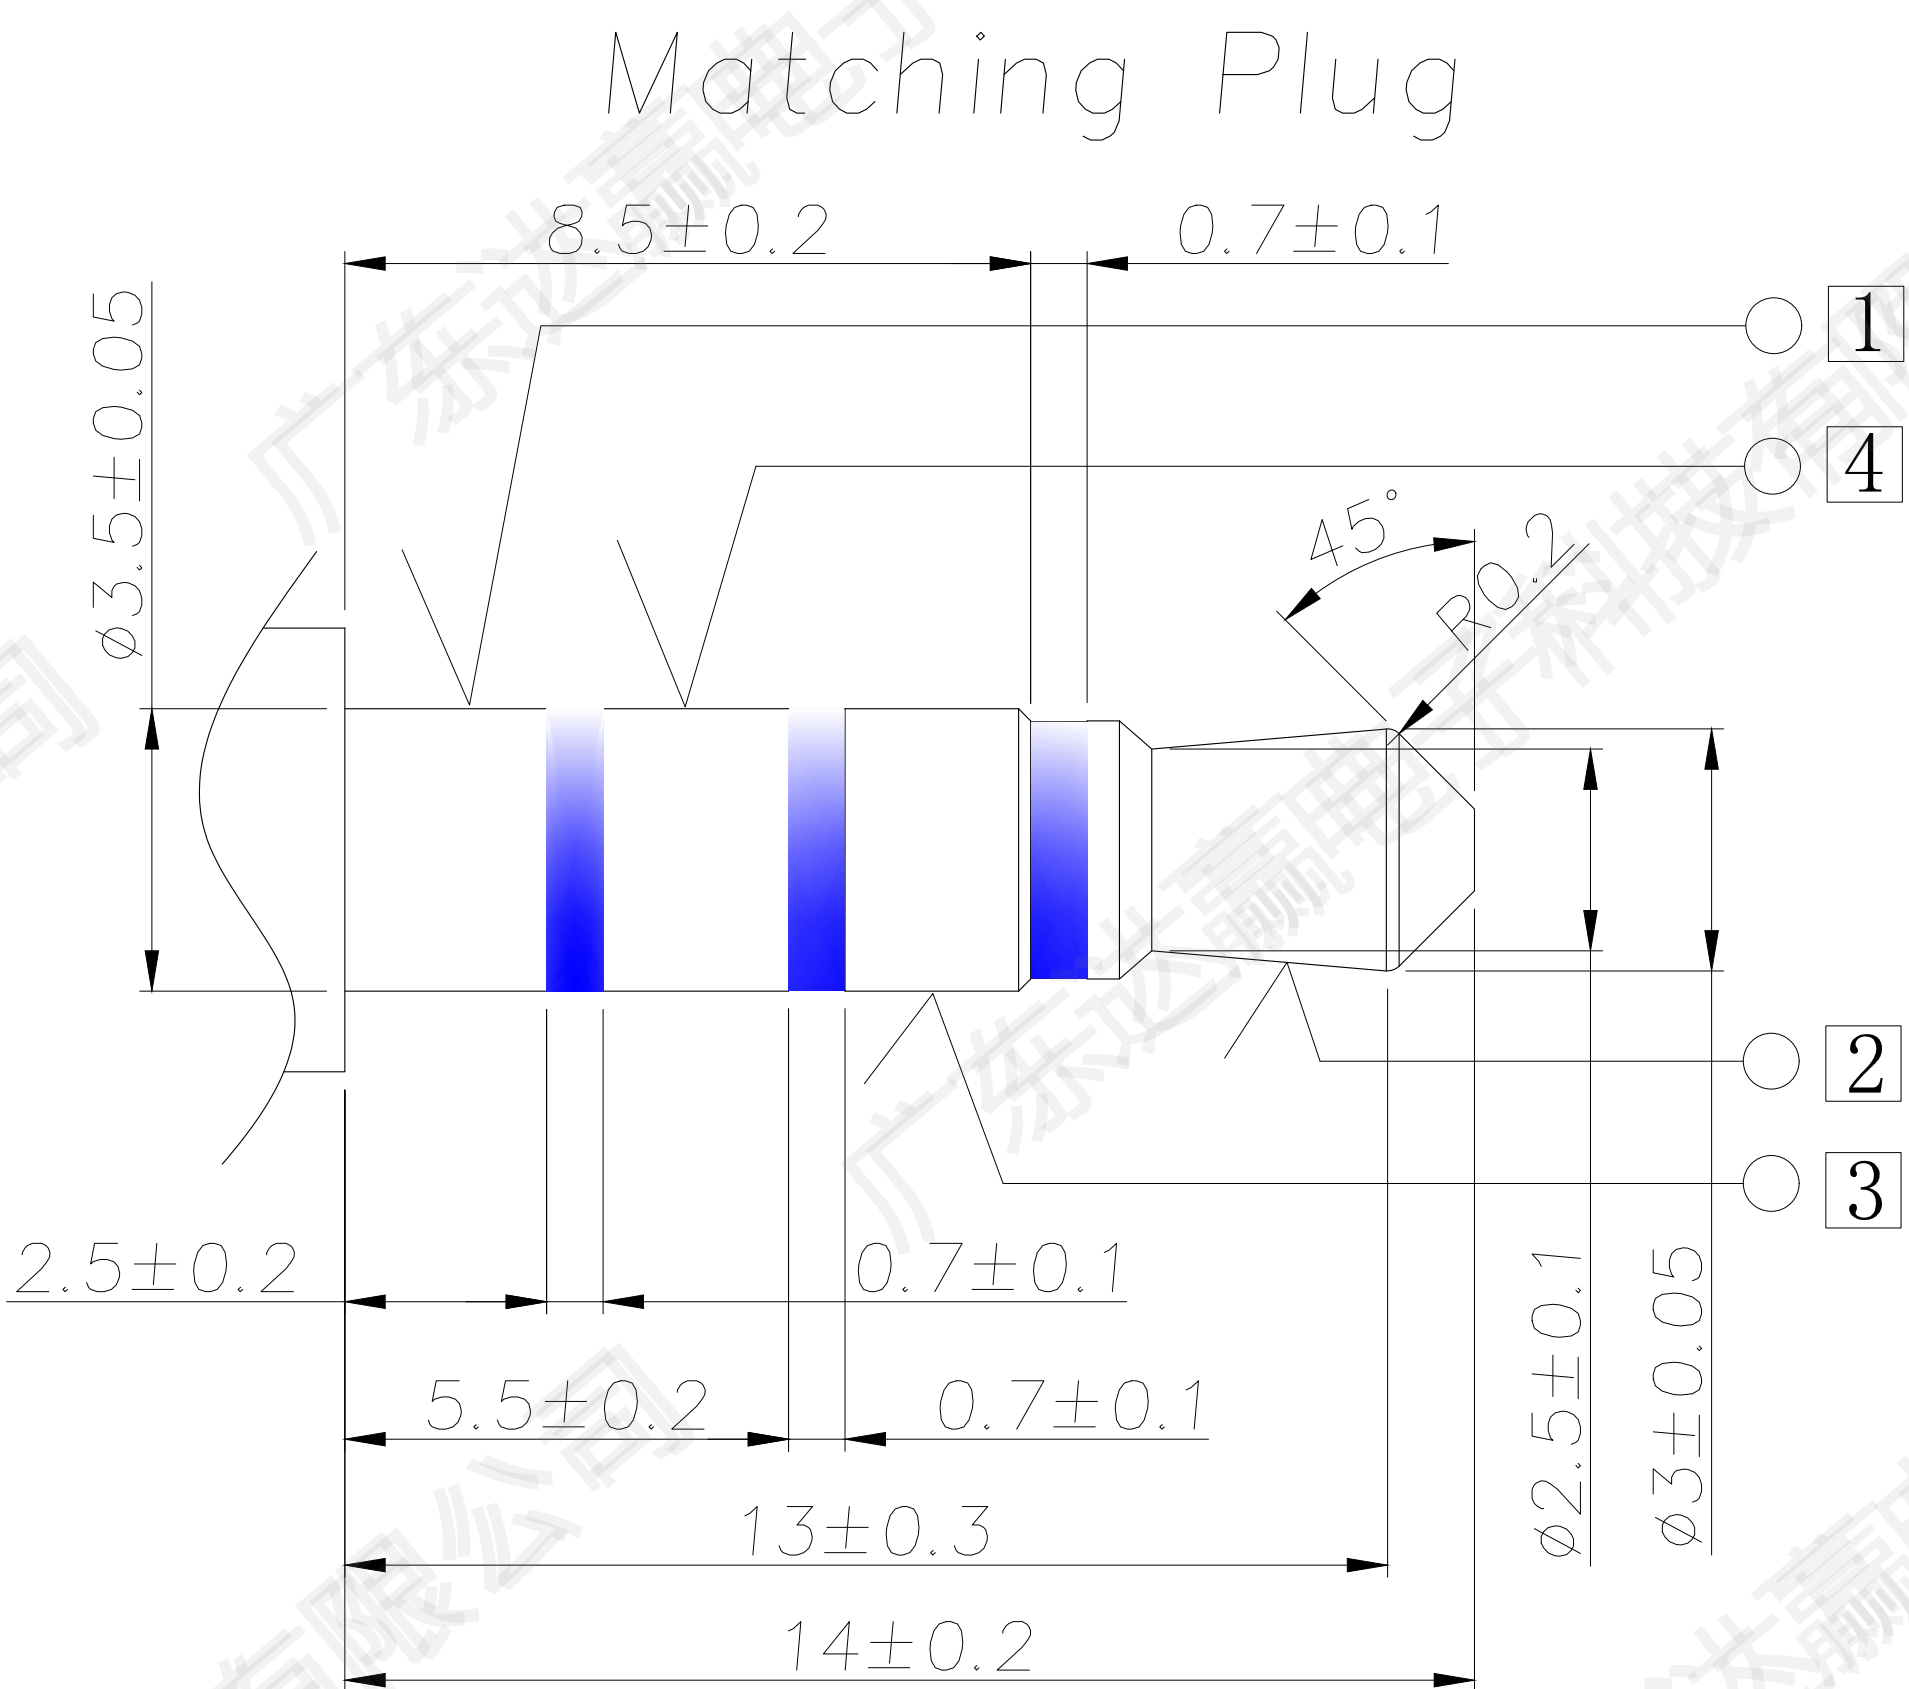

SPECIFICATION:
1.Electrical characteristics
1-1.Current rating:DC 0.5A max.
1-2:Voltage rating:DC 30V.
1-3:Contact resistance:50mΩ max.
1-4.Insulation resistance:100MΩ min. at 500V DC.
1-5.Withstanding voltage:500V AC for 1 minute.
2.Mechanical characteristics
2-1.Life test:5000 cycles min,
2-2.Mating force:3~30N,
Unmating force:2~30N.
3.Salt spray test time:48 hours min.

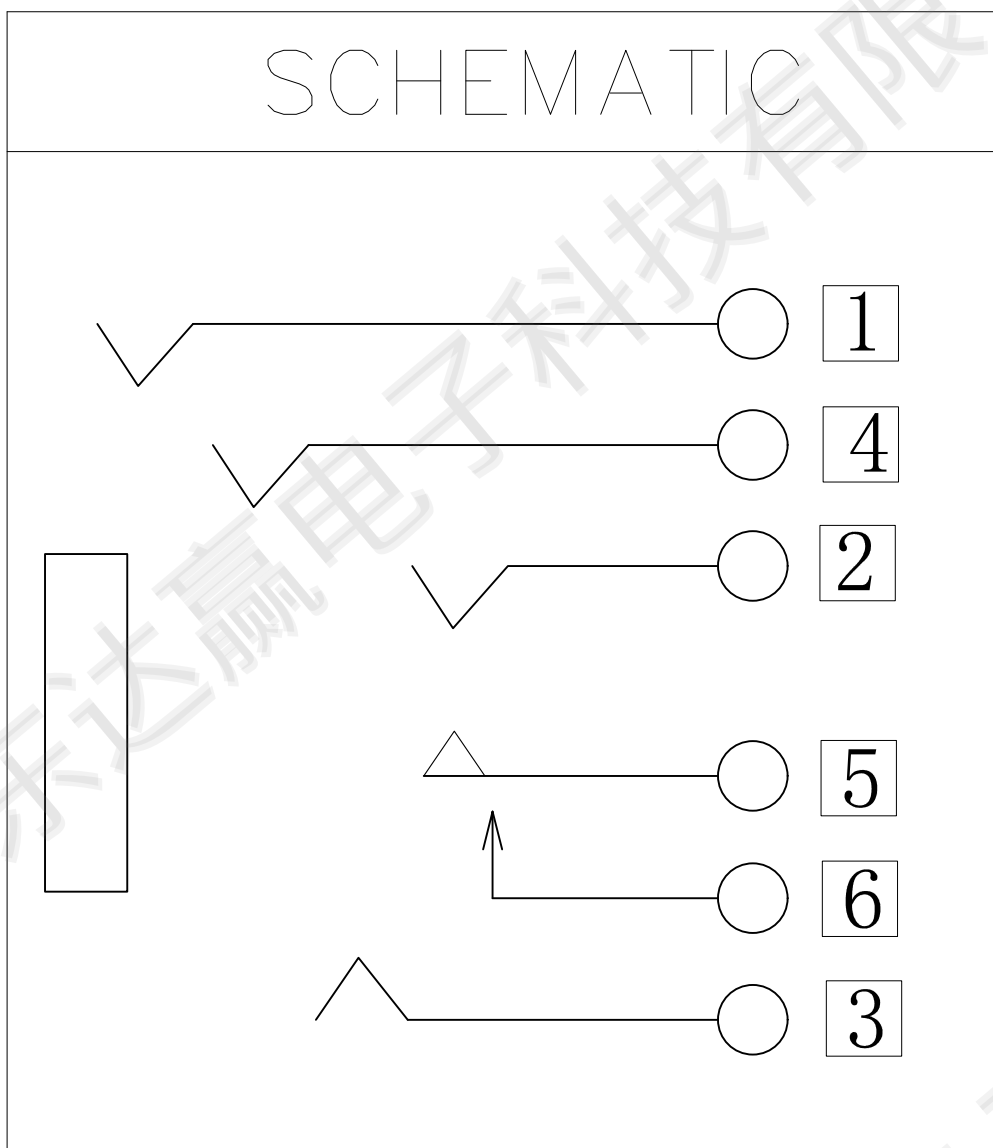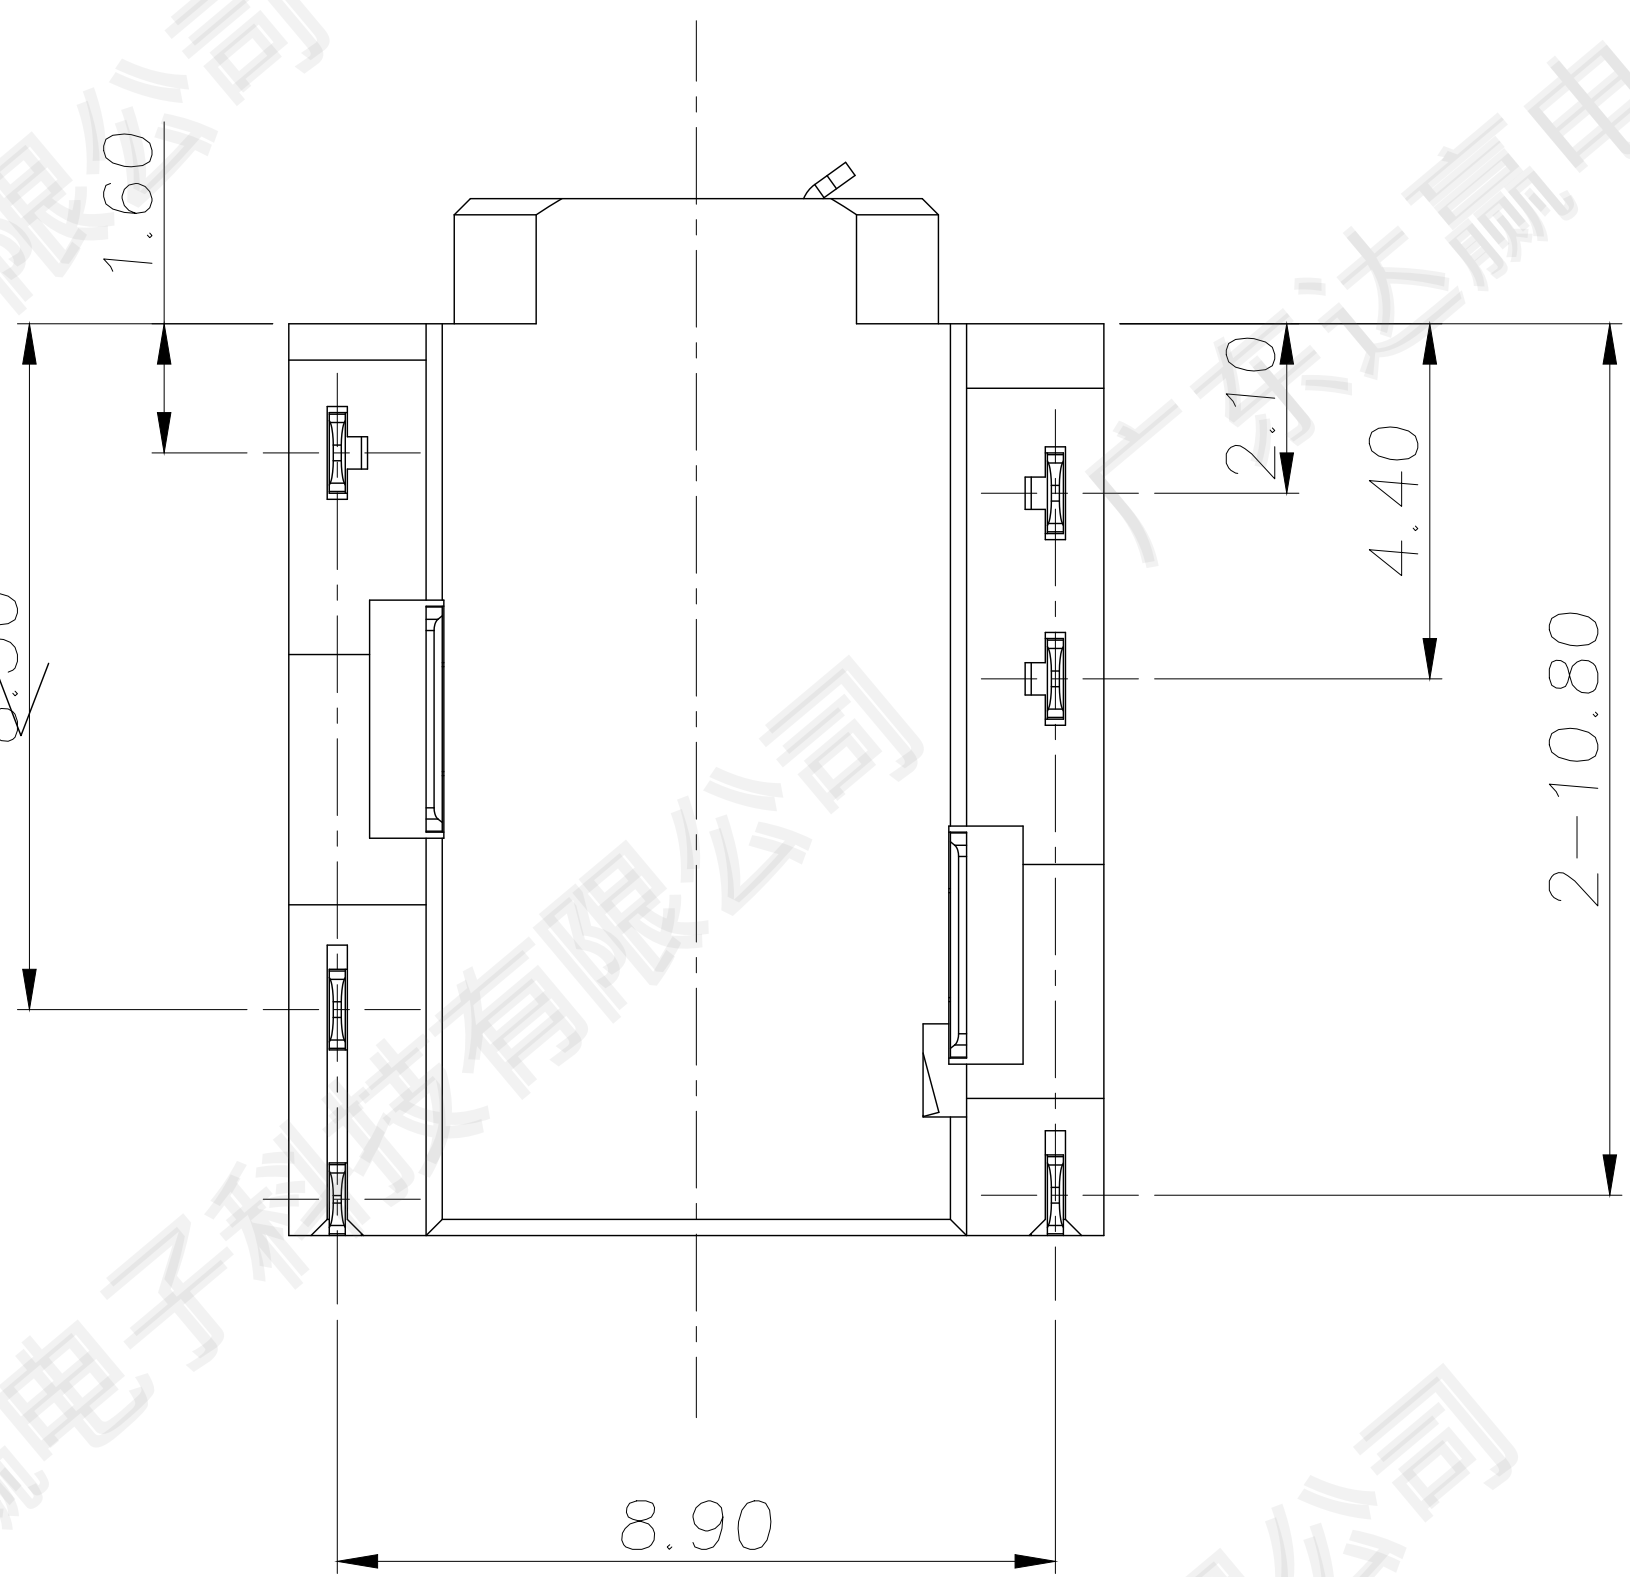

RECOMMENDED P. C. B LAYOUT
TOP VIEW (TOLRANCE: ±0.05)

9	Housing	1	PA10T R630NH+30%GF UL 94V-0	Black
8	Insulator	1	PA10T R630NH+30%GF UL 94V-0	Black
5	Transfer Spring [5]	1	Phosphor bronze, 0.20t	Gold Flash On Contact Area And Solder Tail Area, All over Nickel Plated
7	shell	1	Phosphor bronze, 0.20t	
6	Shunt terminal [6]	1	Phosphor bronze, 0.20t	
4	Ring spring [4]	1	Phosphor bronze, 0.20t	
3	Ring spring [3]	1	Phosphor bronze, 0.20t	
2	Tip spring [2]	1	Phosphor bronze, 0.20t	
1	Earth spring [1]	1	Phosphor bronze, 0.20t	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

						Angle	±2°	DESIGN	李海鸥	2015. 08. 13
						. x	±0. 30	CHECK		
						. xx	±0. 25	APPROVAL		
	A-0	2015. 08. 13	NEW	李海鸥	余 军	. xxx	±0. 10			
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: 3:1	UNIT:mm	A4



广东达赢电子科技有限公司
Guangdong Daying Electronics Technology Co.,ltd.

TITLE:	Ø3.5mm PHONE JACK
MODEL NO.	PJ-D3228A-ABK7AU02L-RH
FILE NO.	Q/SSY.QW-001A-0542