
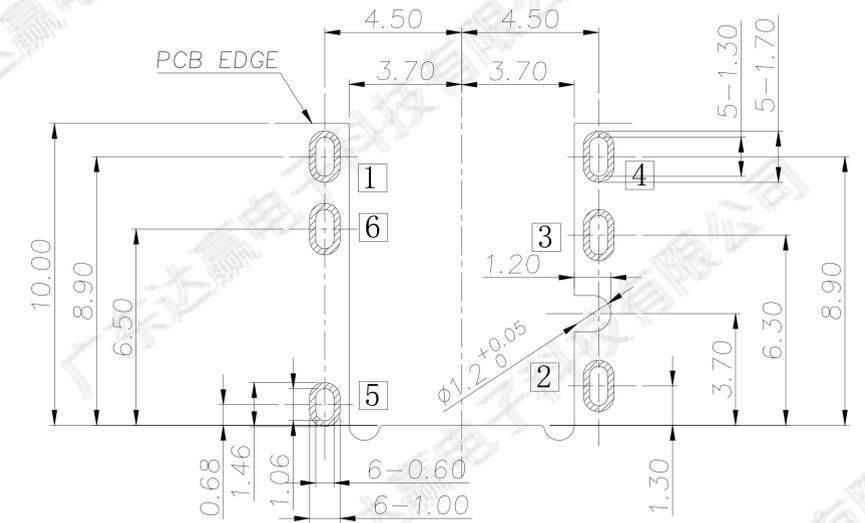
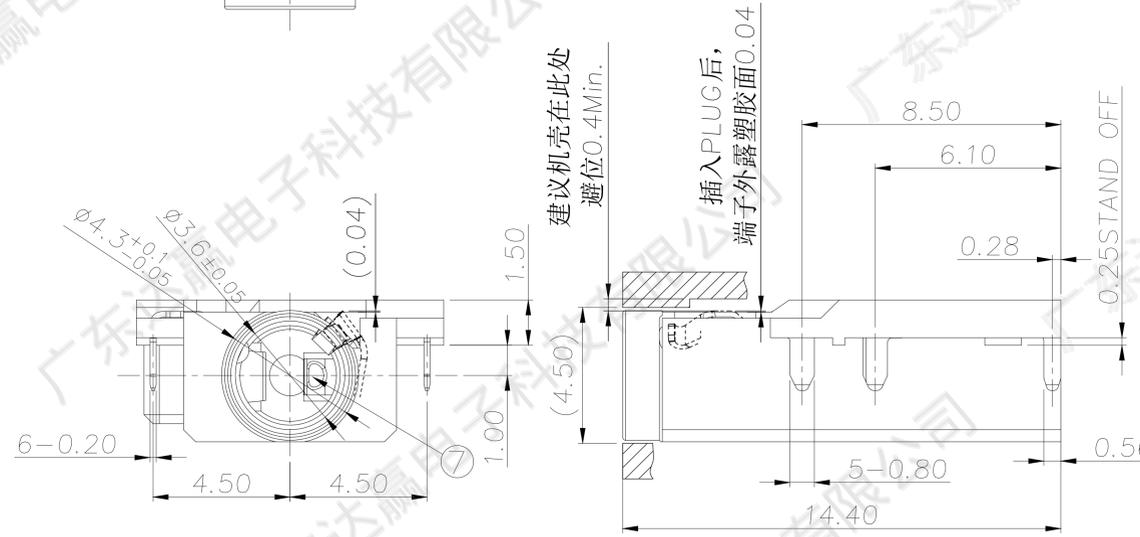
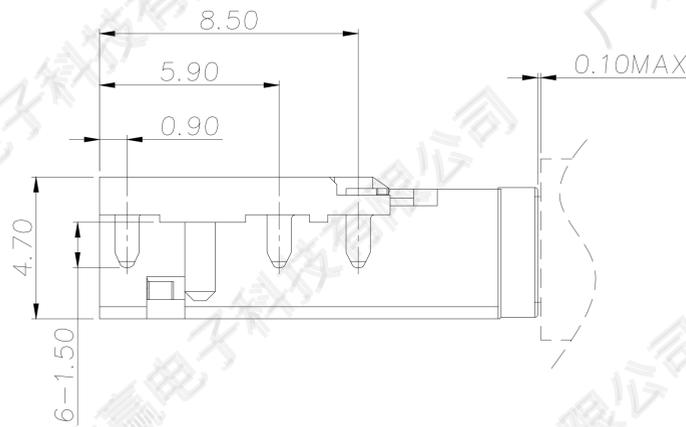
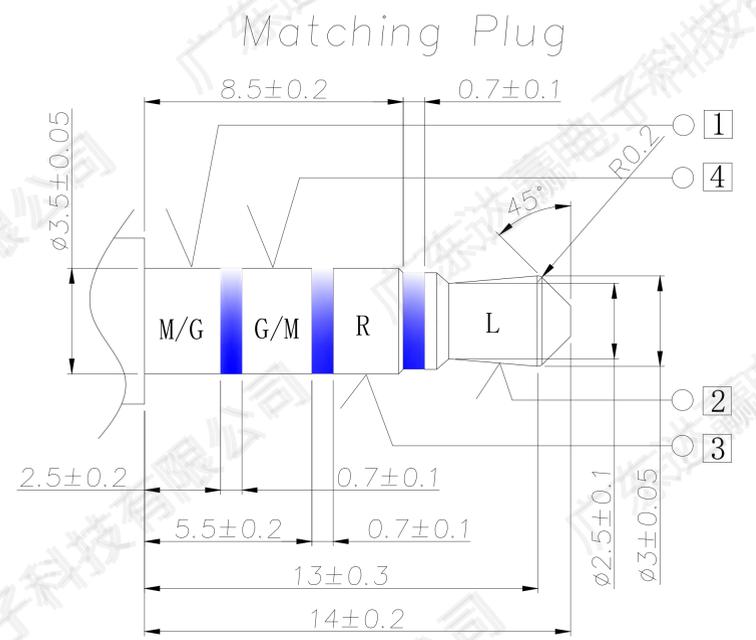
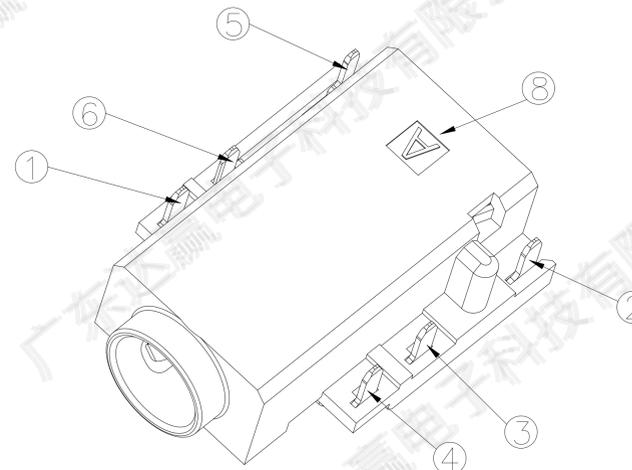


MODEL NO. :  
 PJ-D3261P-ABK7AS02L-RH  
 (1) (2)(3) (4)(5)(6)



- (1) Series no.
- (2) Schematic type: A
- (3) Housing color:  
BK7=Black
- (4) Terminal plating:  
AS02=Plating Tin/Gold flash.
- (5) Packing mode:L=Reel packing
- (6) Environmental requirements:  
RH=RoHS 2.0 + Halogen Free

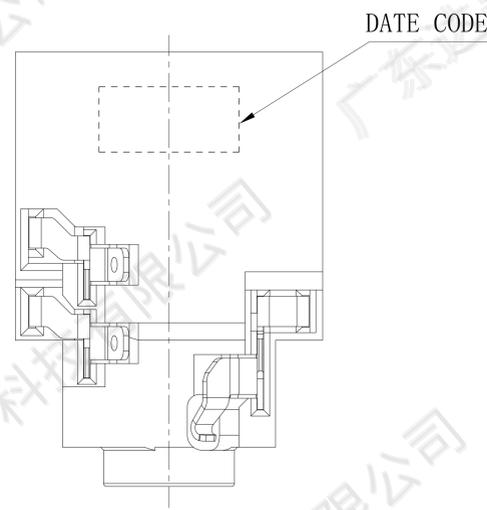

RECOMMENDED P. C. B LAYOUT  
 TOP VIEW (TOLRANCE: ±0.05)

SPECIFICATION:

1. Electrical characteristics
  - 1-1. Current rating: DC 1.0A max.
  - 1-2. Voltage rating: DC 12V.
  - 1-3. Contact resistance: 50mΩ max.
  - 1-4. Insulation resistance: 100MΩ min. at 500V DC.
  - 1-5. Withstanding voltage: 500V AC for 1 minute.
2. Mechanical characteristics
  - 2-1. Life test: 5000 cycles min,
  - 2-2. Mating force: 3~30N.  
Unmating force: 3~30N.

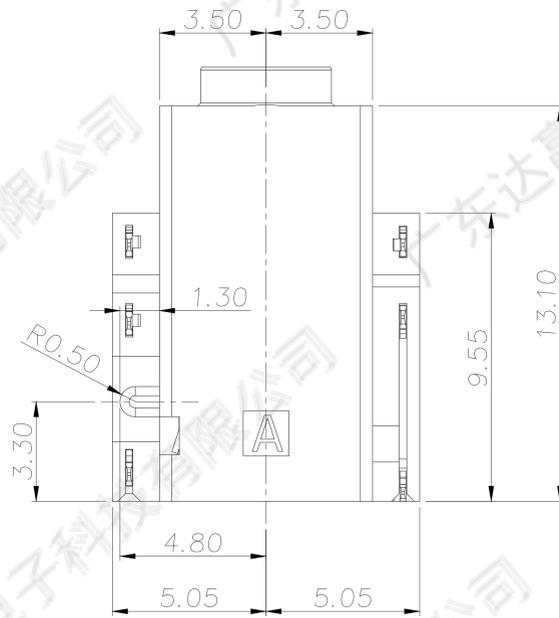

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
8	Housing	1	PA10T	Black
7	Insulator	1	PA10T	Black
5	Transfer Spring	1	C5210R, 0.20t	Gold Flash On Contact Area And Solder Tail Area, All over 50u" Nickel Plated
6	Shunt terminal	1	C5210R, 0.20t	Gold Flash On Contact Area
4	Ring spring	1	C5191R, 0.20t	80u"matte tin
3	Ring spring	1	C5191R, 0.20t	Plating on Solder Tail
2	Tip spring	1	C5210R, 0.20t	Area, All over 50u"Nickel Plated
1	Earth spring	1	C5210R, 0.20t	

ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	SCALE: 1:1	UNIT:mm	A4
						Angle ±2°	DESIGN	刘伟	2020.07.23
						.x ±0.35	CHECK		
	01	2020.07.23	UPDATE	刘伟	余军	.xx ±0.25	APPROVAL		
	00	2020.06.10	NEW	刘伟	余军	.xxx ±0.10			

CUSTOMER DRAWING		TITLE:	φ3.5mm PHONE JACK
		MODEL NO.	PJ-D3261P-ABK7AS02L-RH
		FILE NO.	Q/DY.QW-001A-0xxx

广东达赢电子科技有限公司  
 Guangdong DaYing Electronic Technology Co., Ltd.