

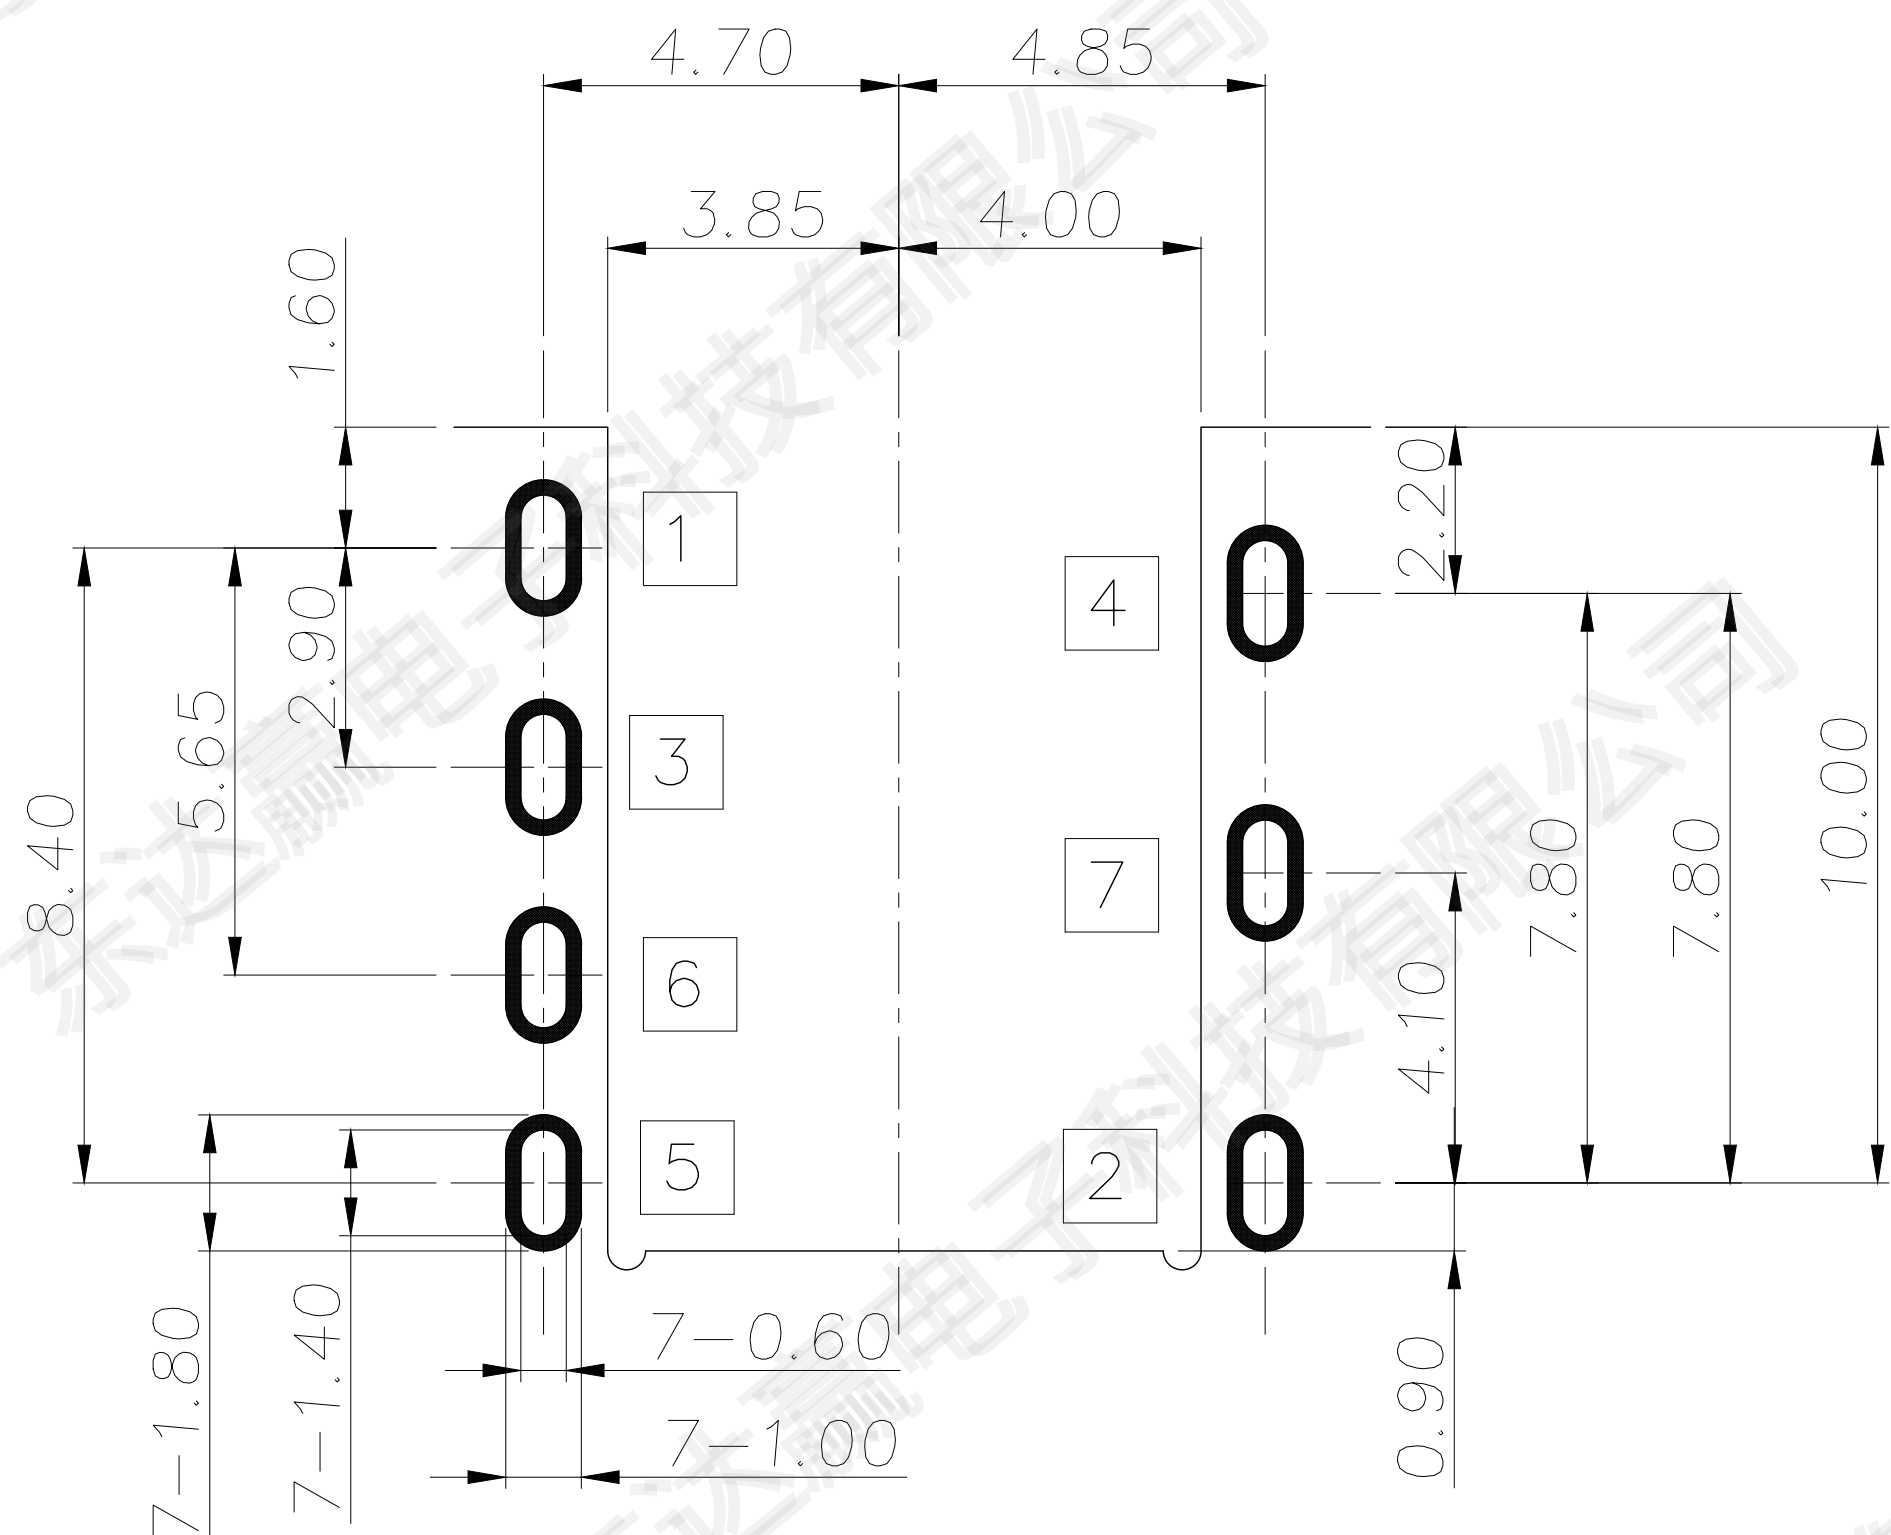
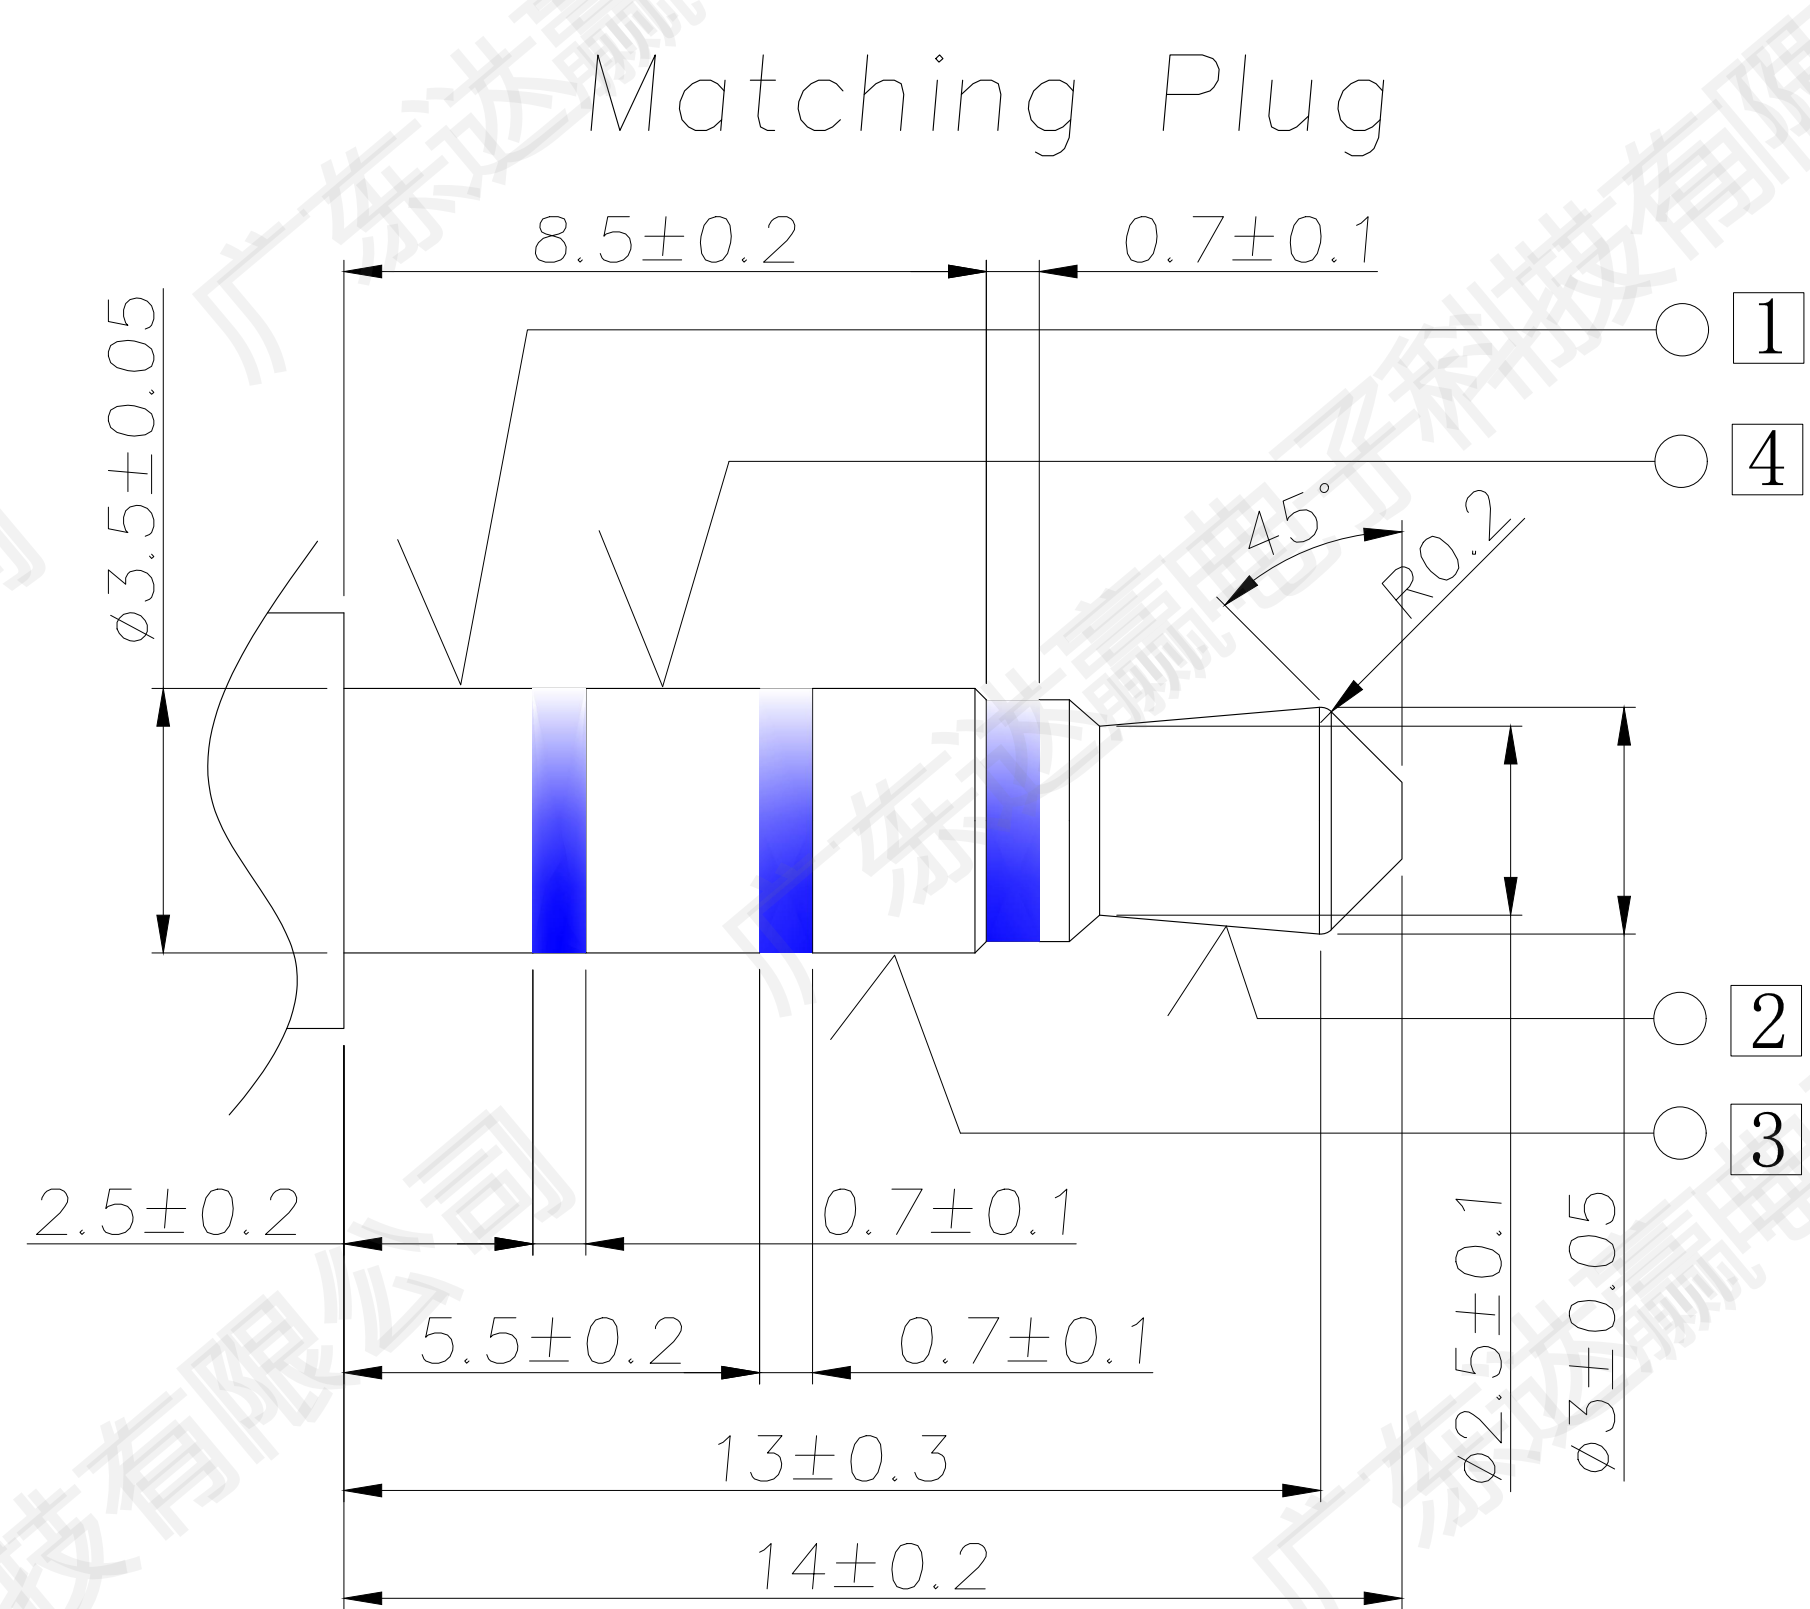
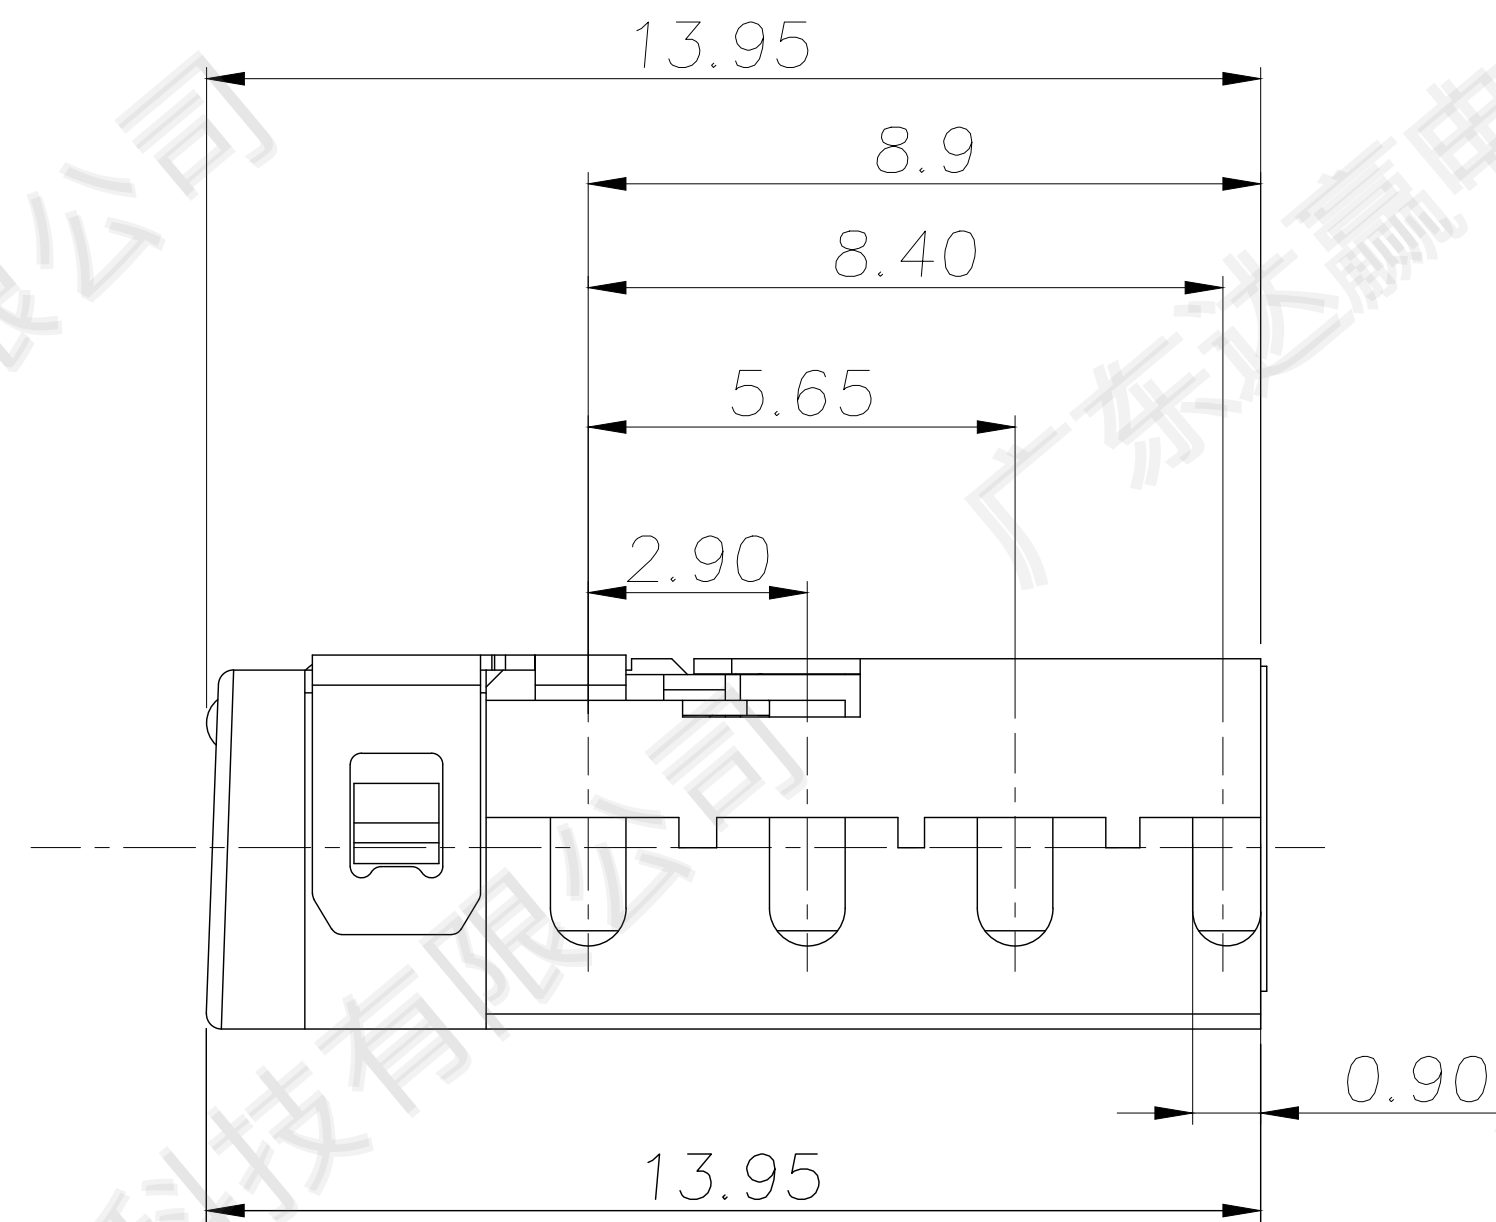
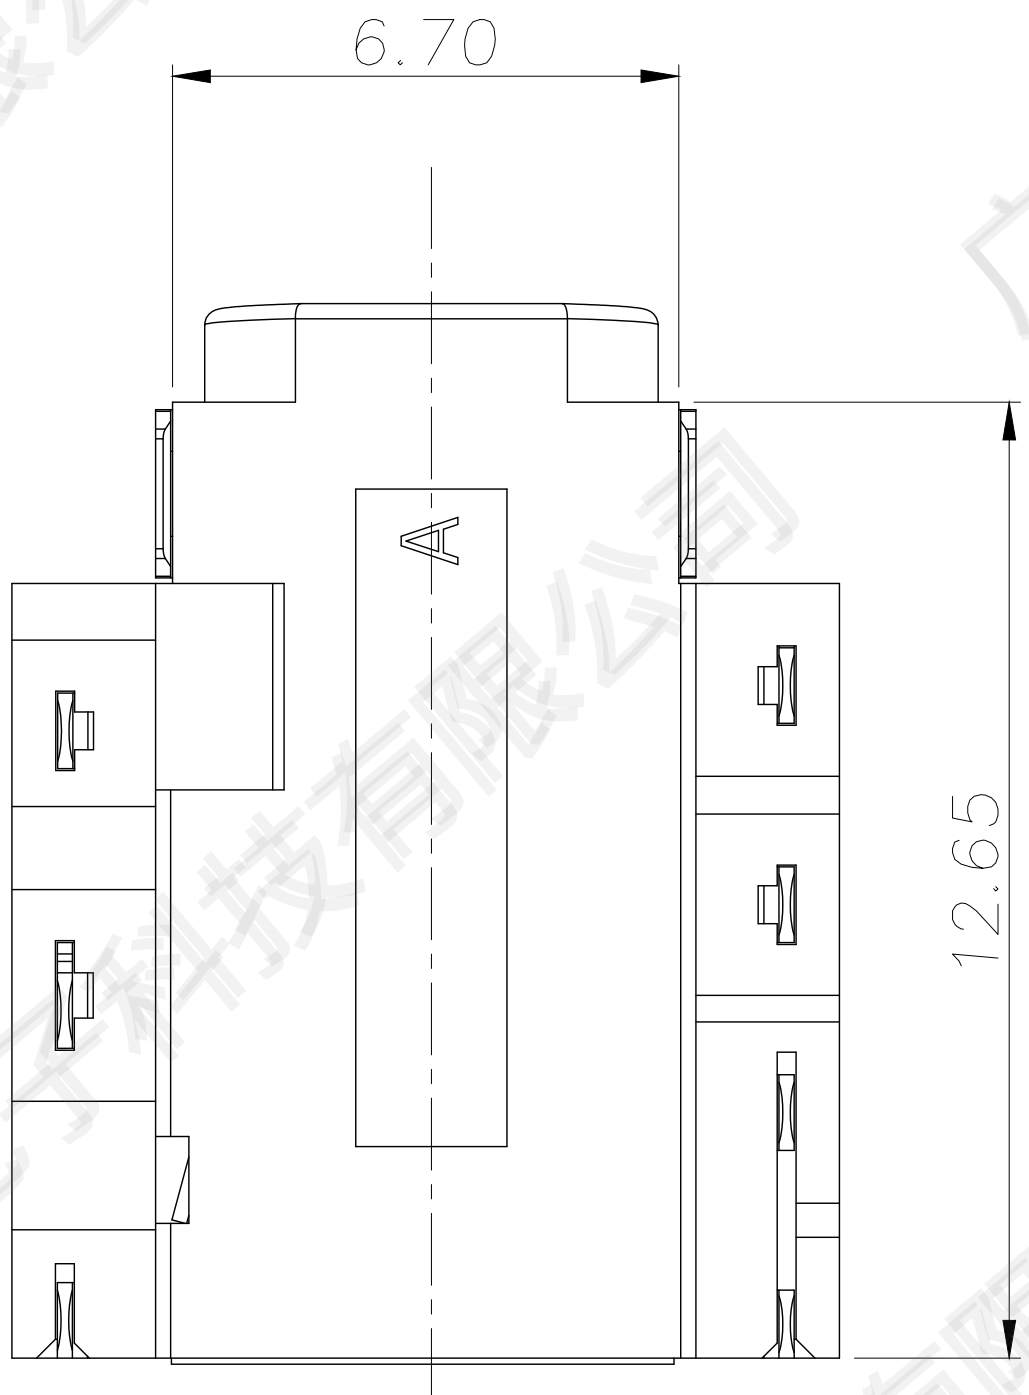
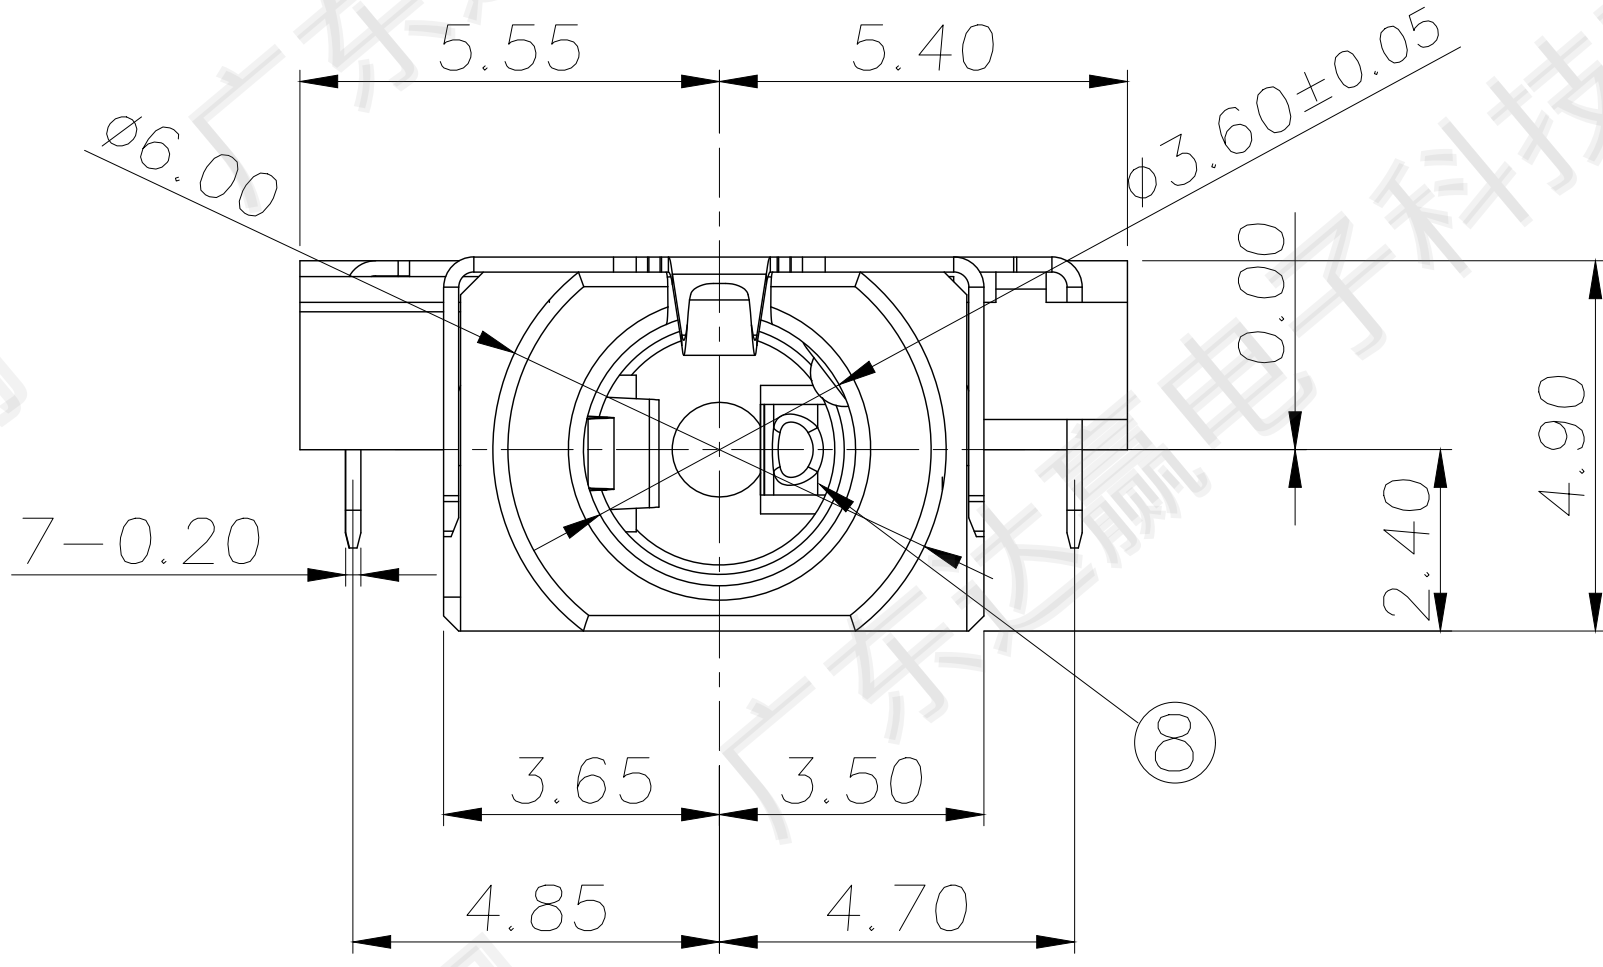
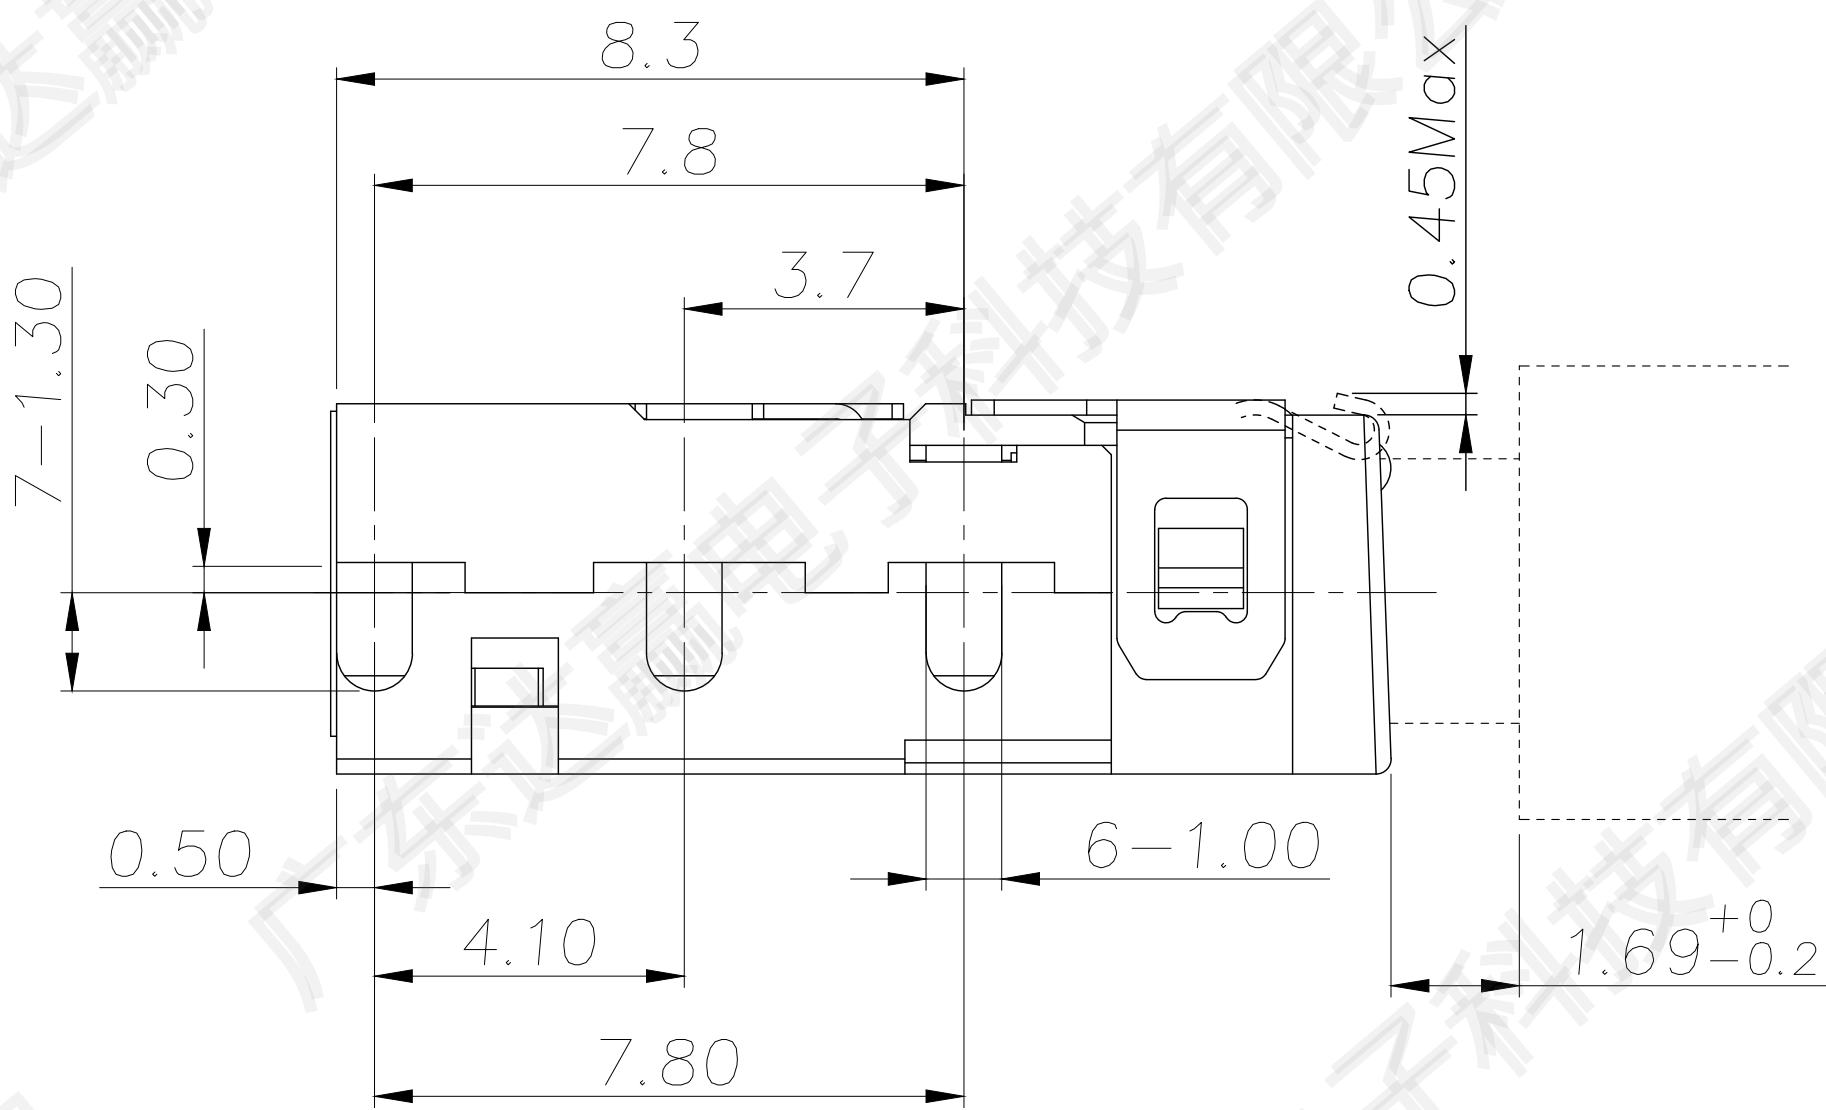


- MODEL NO. :
PJ-D3161B-ABK7AS02L-RH
- (1) (2) (3) (4) (5) (6)
- (1) Series no.
- (2) Schematic type: A
- (3) Housing color:
BK7=Black
- (4) Terminal plating:
AS02=Plating Gold Flash.
- (5) Packing mode:L=Reel packing
- (6) Environmental requirements:
RH=RoHS 2.0 + Halogen Free

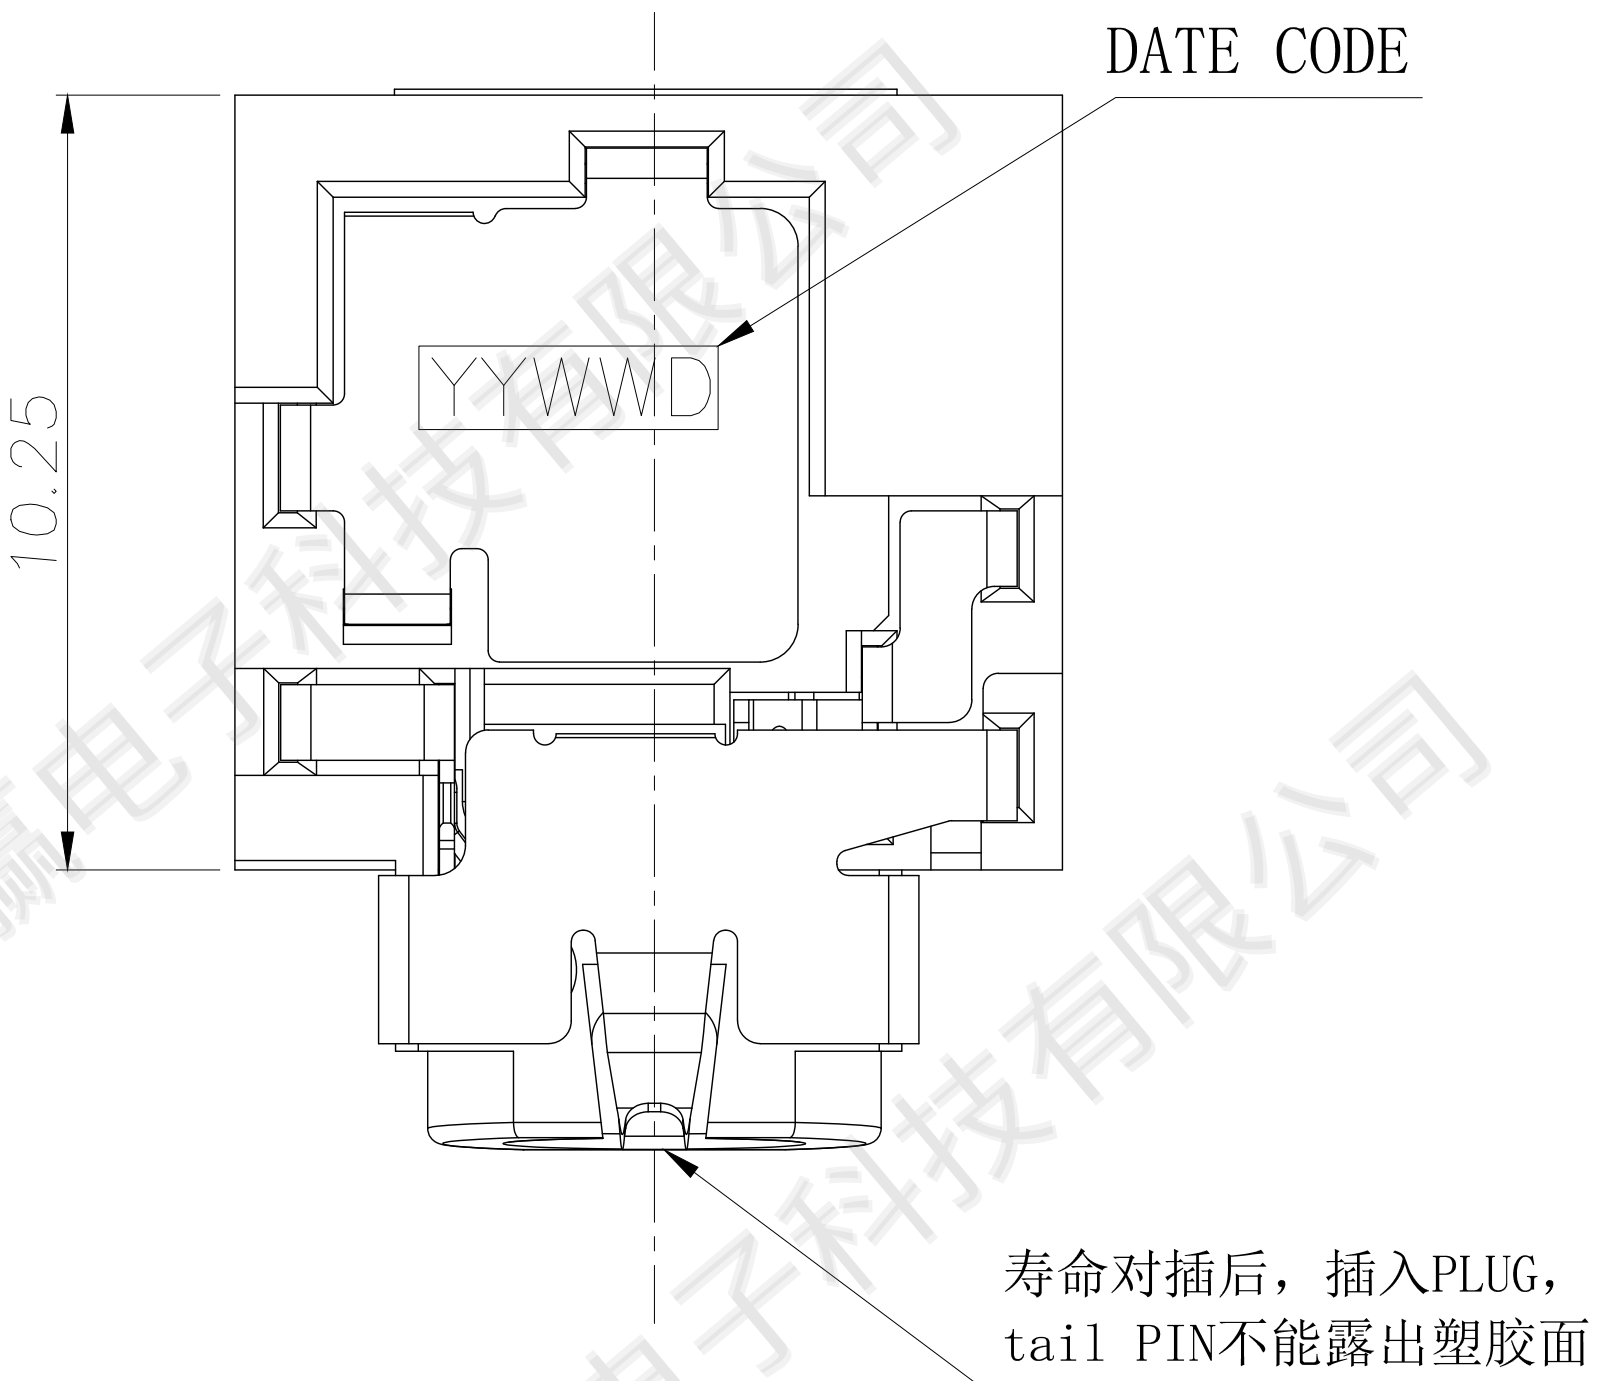

- SPECIFICATION:
1. Electrical characteristics
- 1-1. Current rating: DC 0.5A max.
- 1-2. Voltage rating: DC 30V.
- 1-3. Contact resistance: 50mΩ max.
- 1-4. Insulation resistance: 100MΩ min. at 500V DC.
- 1-5. Withstanding voltage: 500V AC for 1 minute.
2. Mechanical characteristics
- 2-1. Life test: 5000 cycles min,
- 2-2. Mating force: 3~30N,
Unmating force: 3~30N.

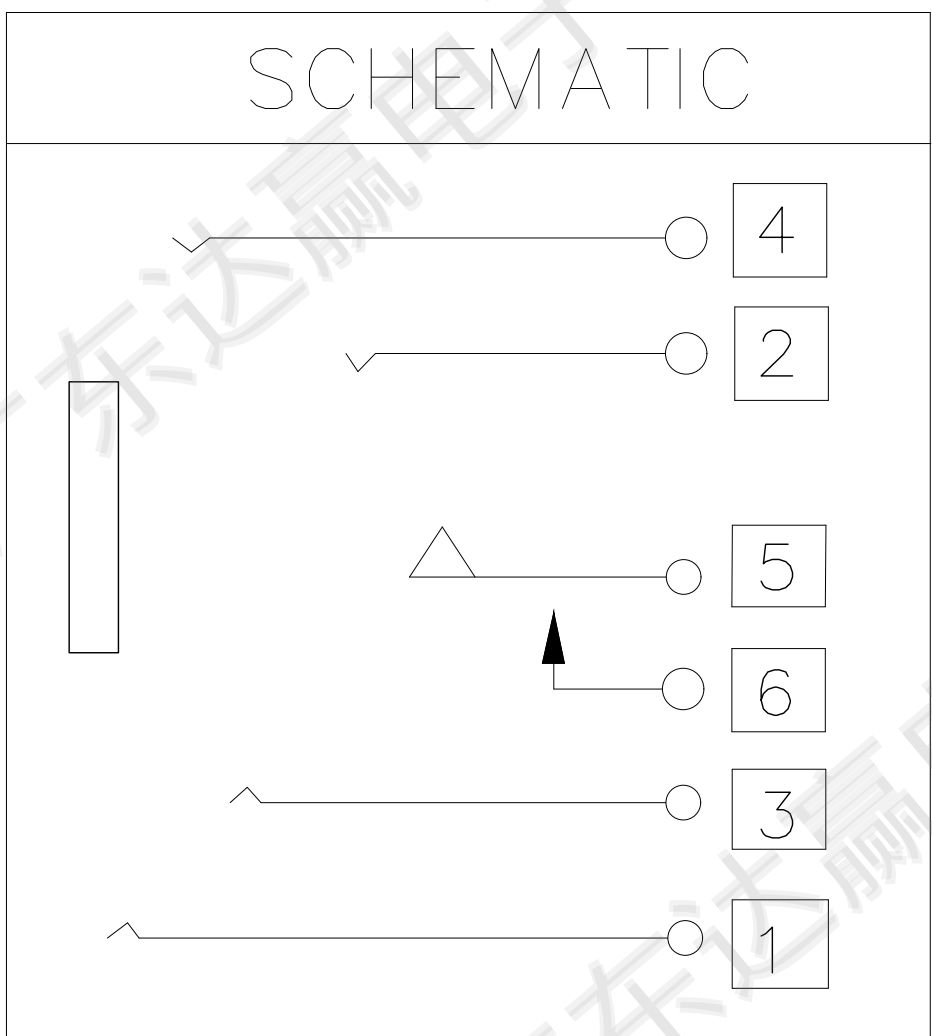

9	Housing	1	HIGH TEMPERATURE PLASTIC	Black
8	Insulator	1	HIGH TEMPERATURE PLASTIC	Black
6	Shunt terminal	1	Phosphor bronze, 0.20t	Gold Flash On Contact And Solder Tail Area, All over 50u" Min Nickel Plated
5	Transfer Spring	1	Phosphor bronze, 0.20t	
7	Shell	1	Phosphor bronze, 0.20t	60u" Min Nickel Plated
4	Ring spring	1	Phosphor bronze, 0.20t	Gold Flash On Contact Area, 80u" Min matte tin Plating on Solder Tail Area, All over 50u" Min Nickel Plated
3	Ring spring	1	Phosphor bronze, 0.20t	
2	Tip spring	1	Phosphor bronze, 0.20t	
1	Earth spring	1	Phosphor bronze, 0.20t	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

						Angle	±2°	DESIGN	罗振强	2019. 01. 22
						. x	±0. 35	CHECK		
						. xx	±0. 25	APPROVAL		
						. xxx	±0. 10	SCALE: 1:1	UNIT:mm	A4
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED				

广东达赢电子科技有限公司
Guangdong DaYing Electronic Technology Co., Ltd.

CUSTOMER DRAWING	TITLE:	Ø3. 5mm PHONE JACK
	MODEL NO.	PJ-D3161B-ABK7AS02L-RH
	FILE NO.	Q/DY. QW-001A-0xxx