
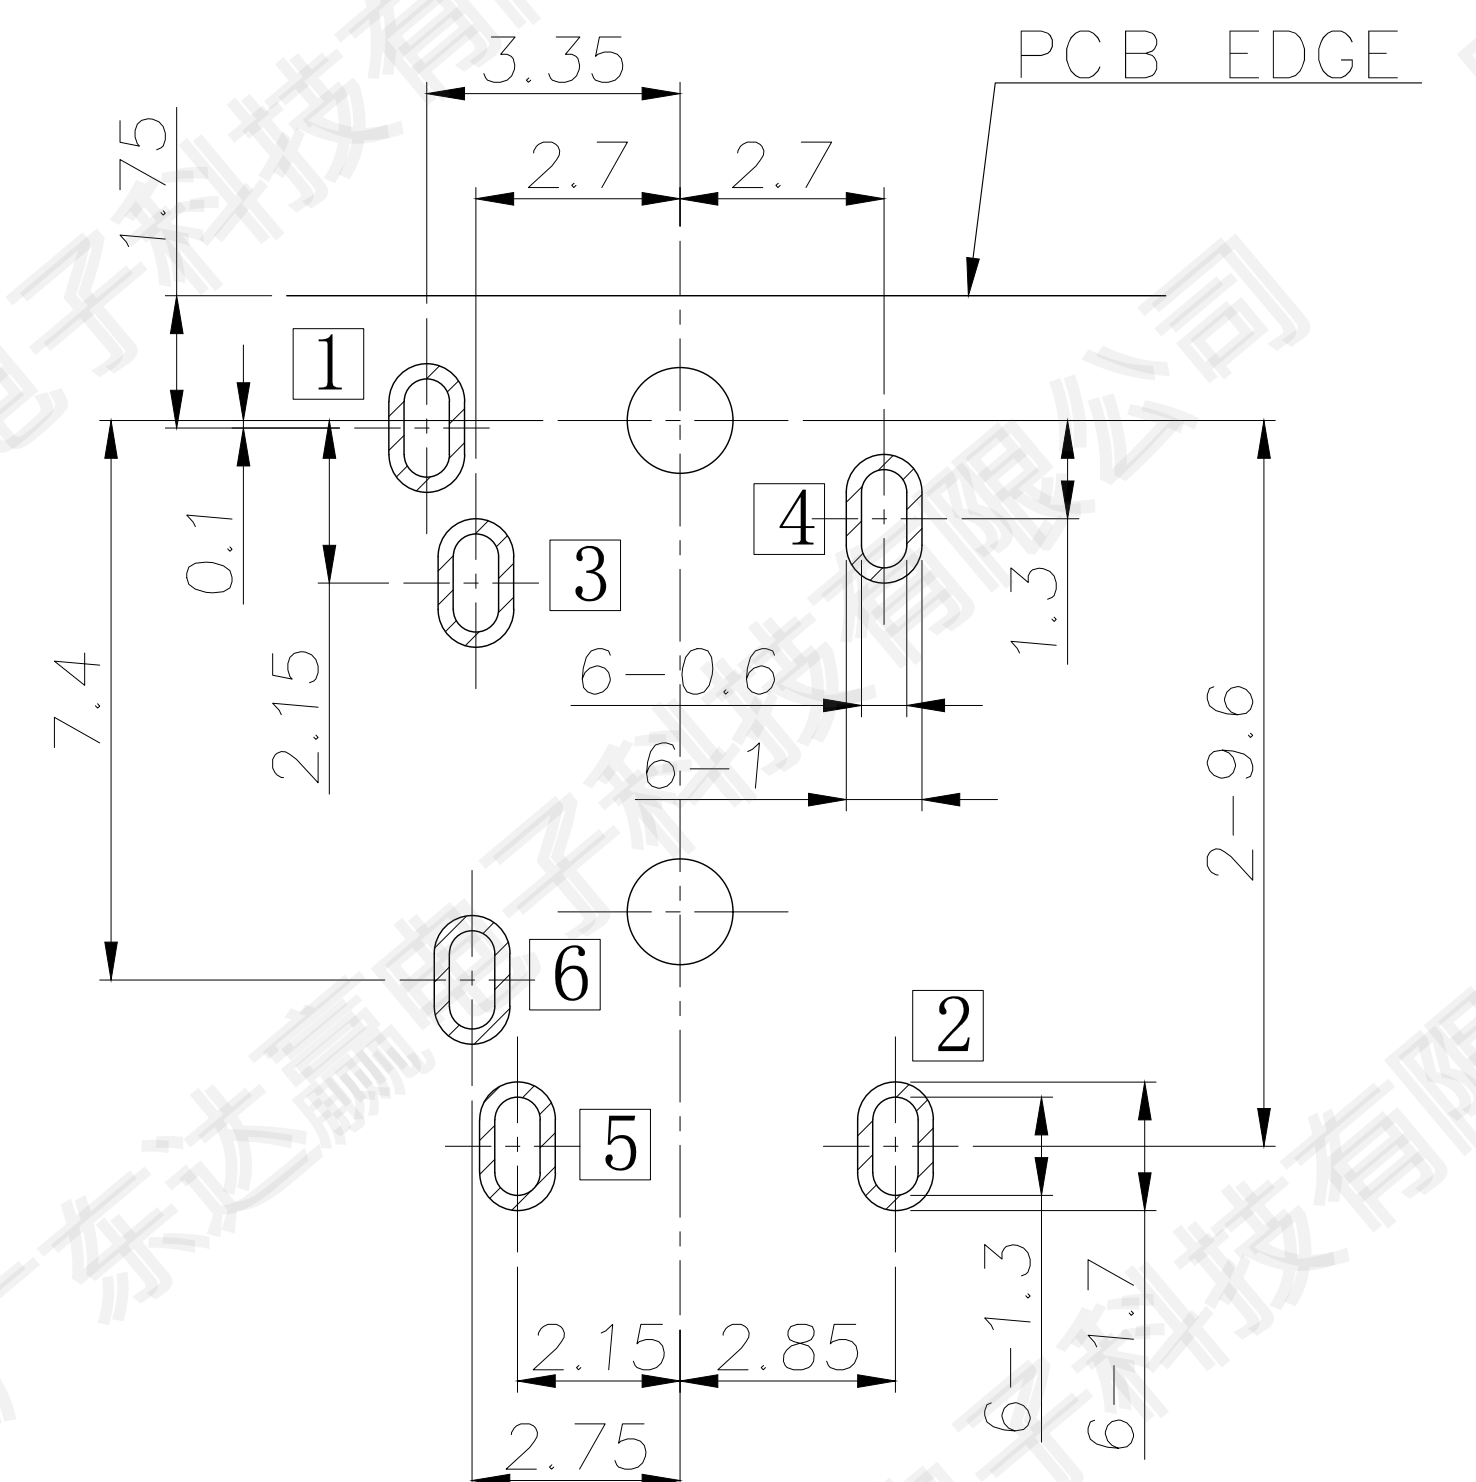
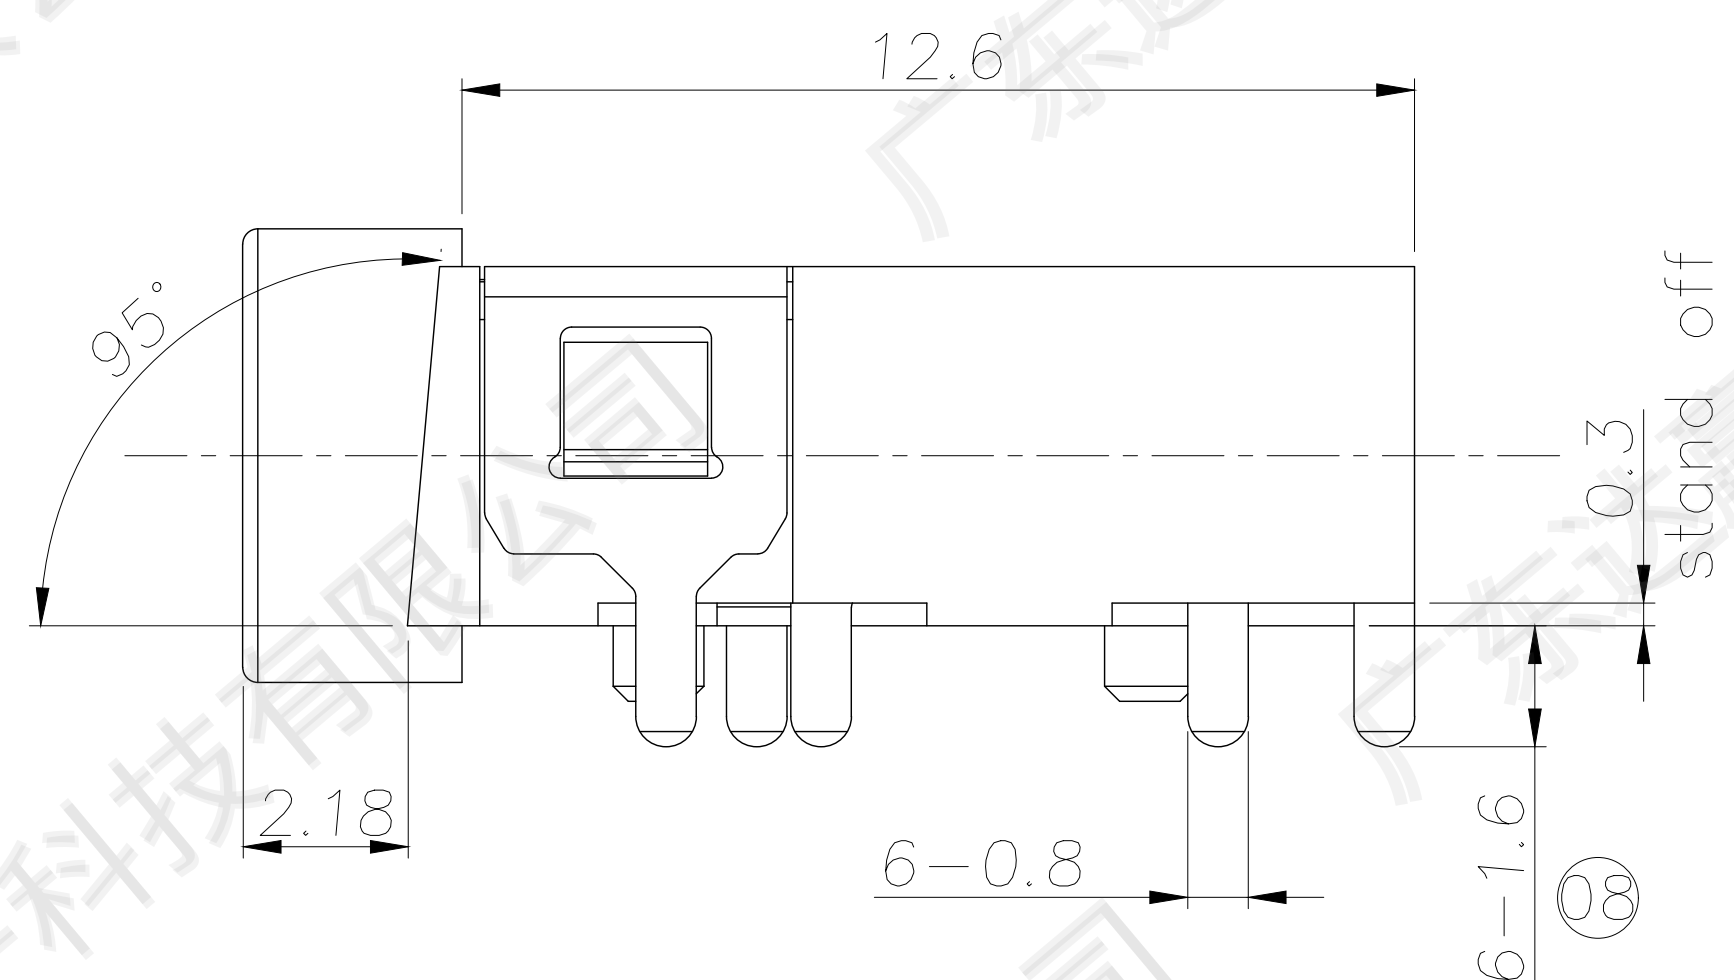
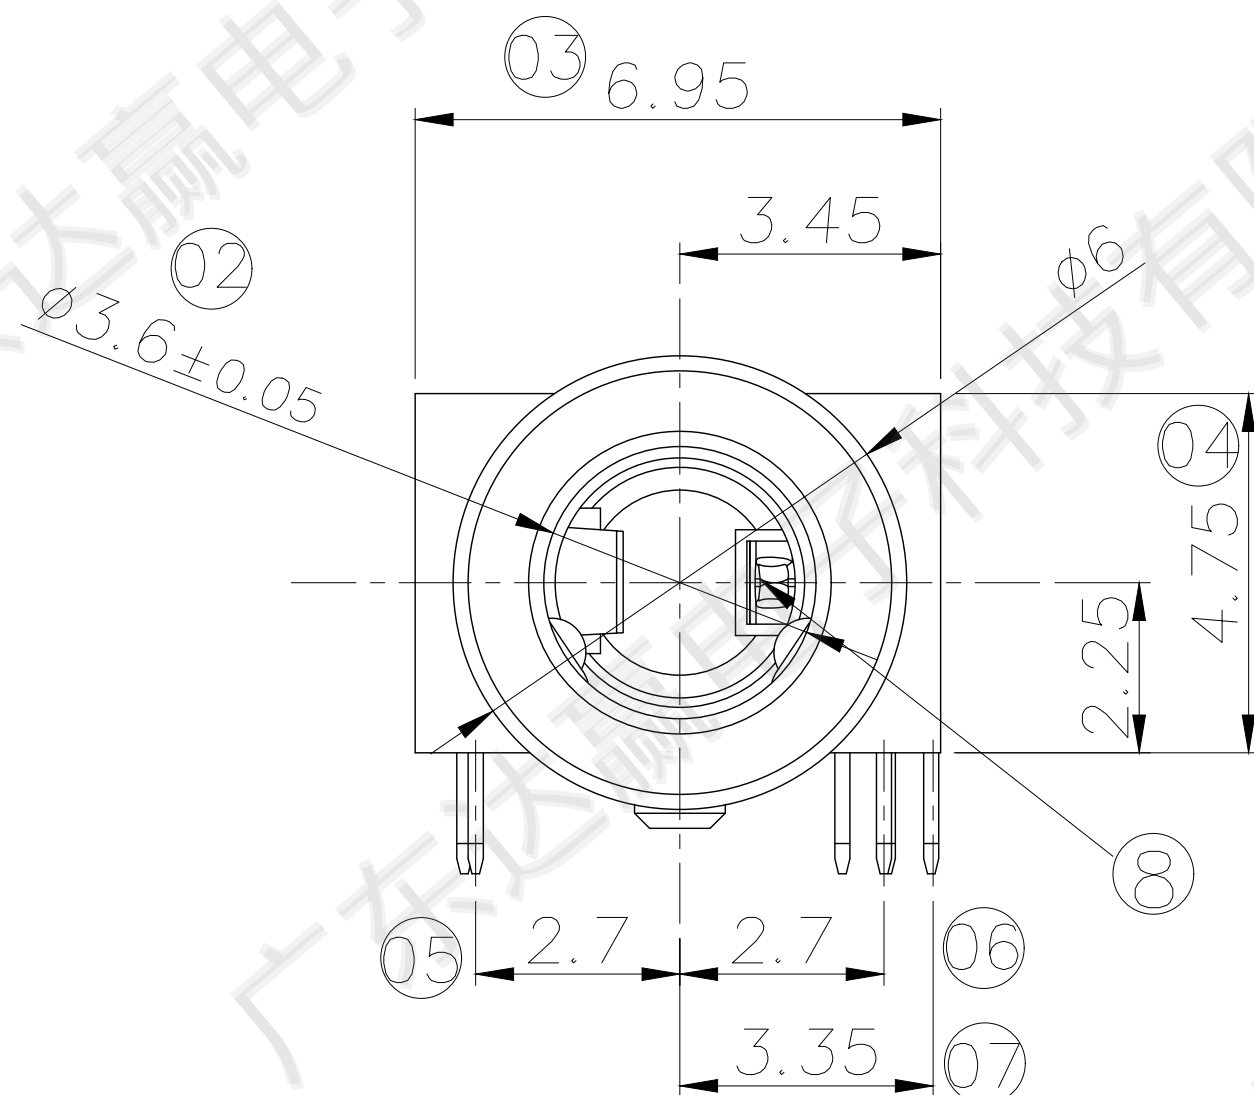
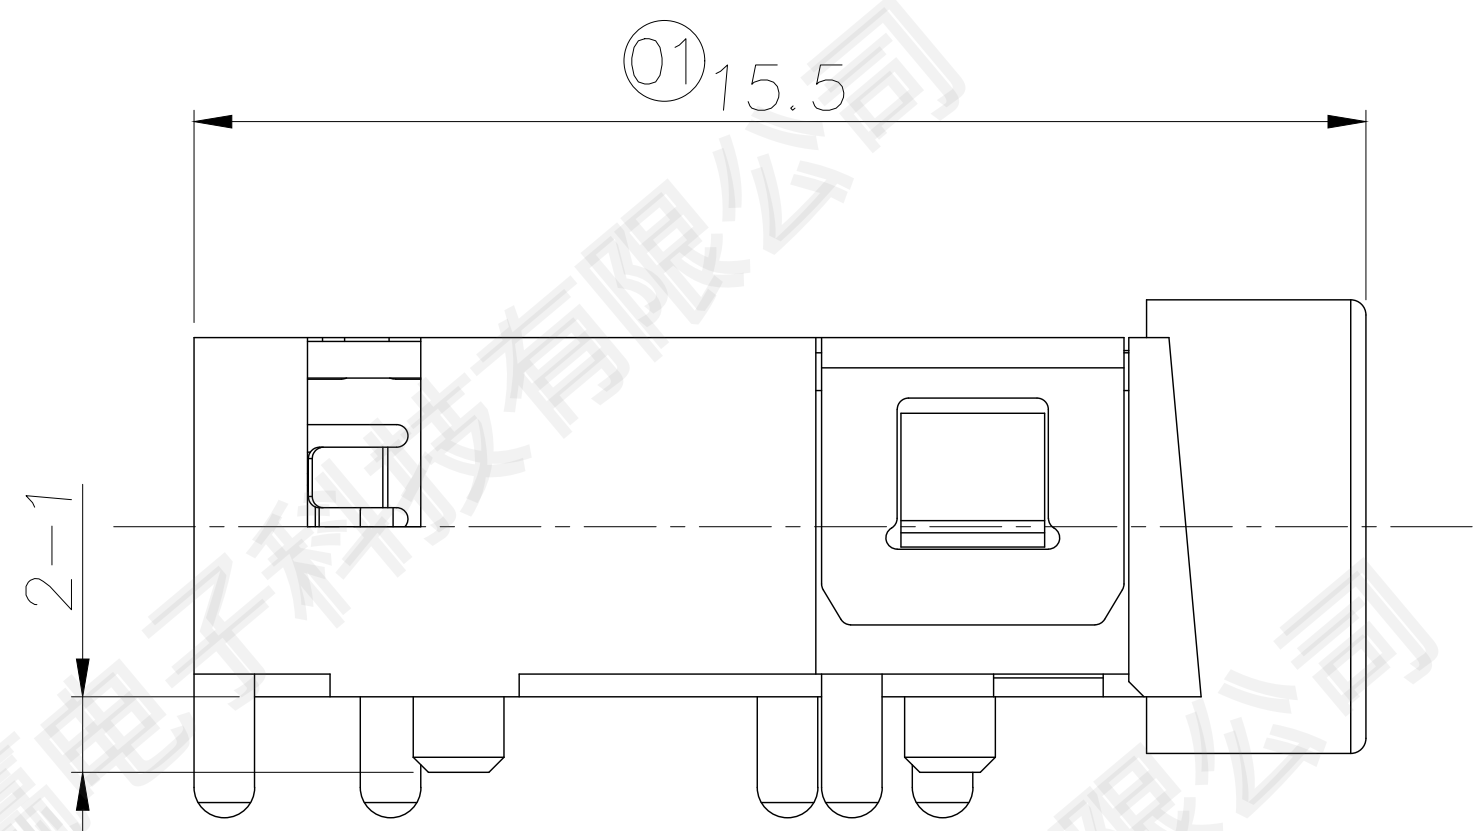
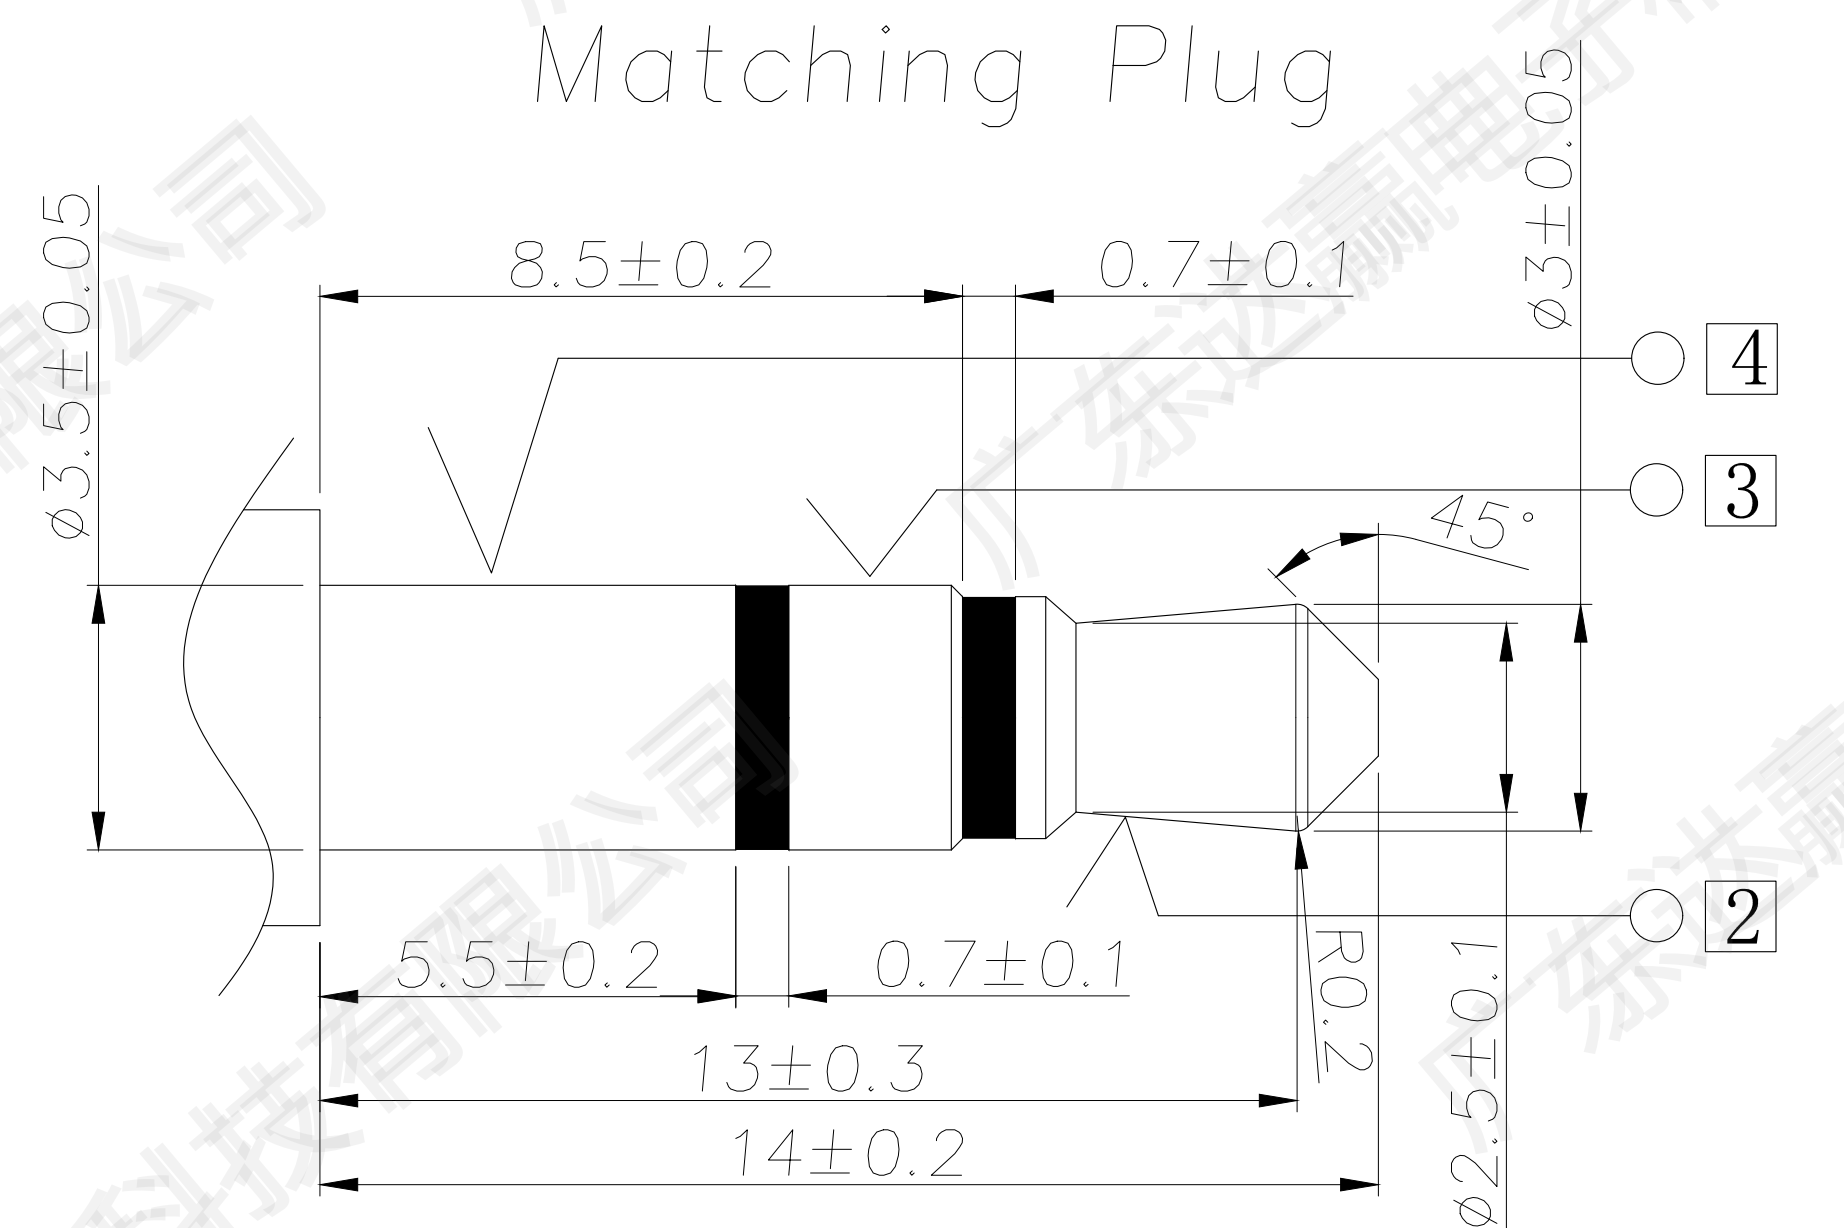
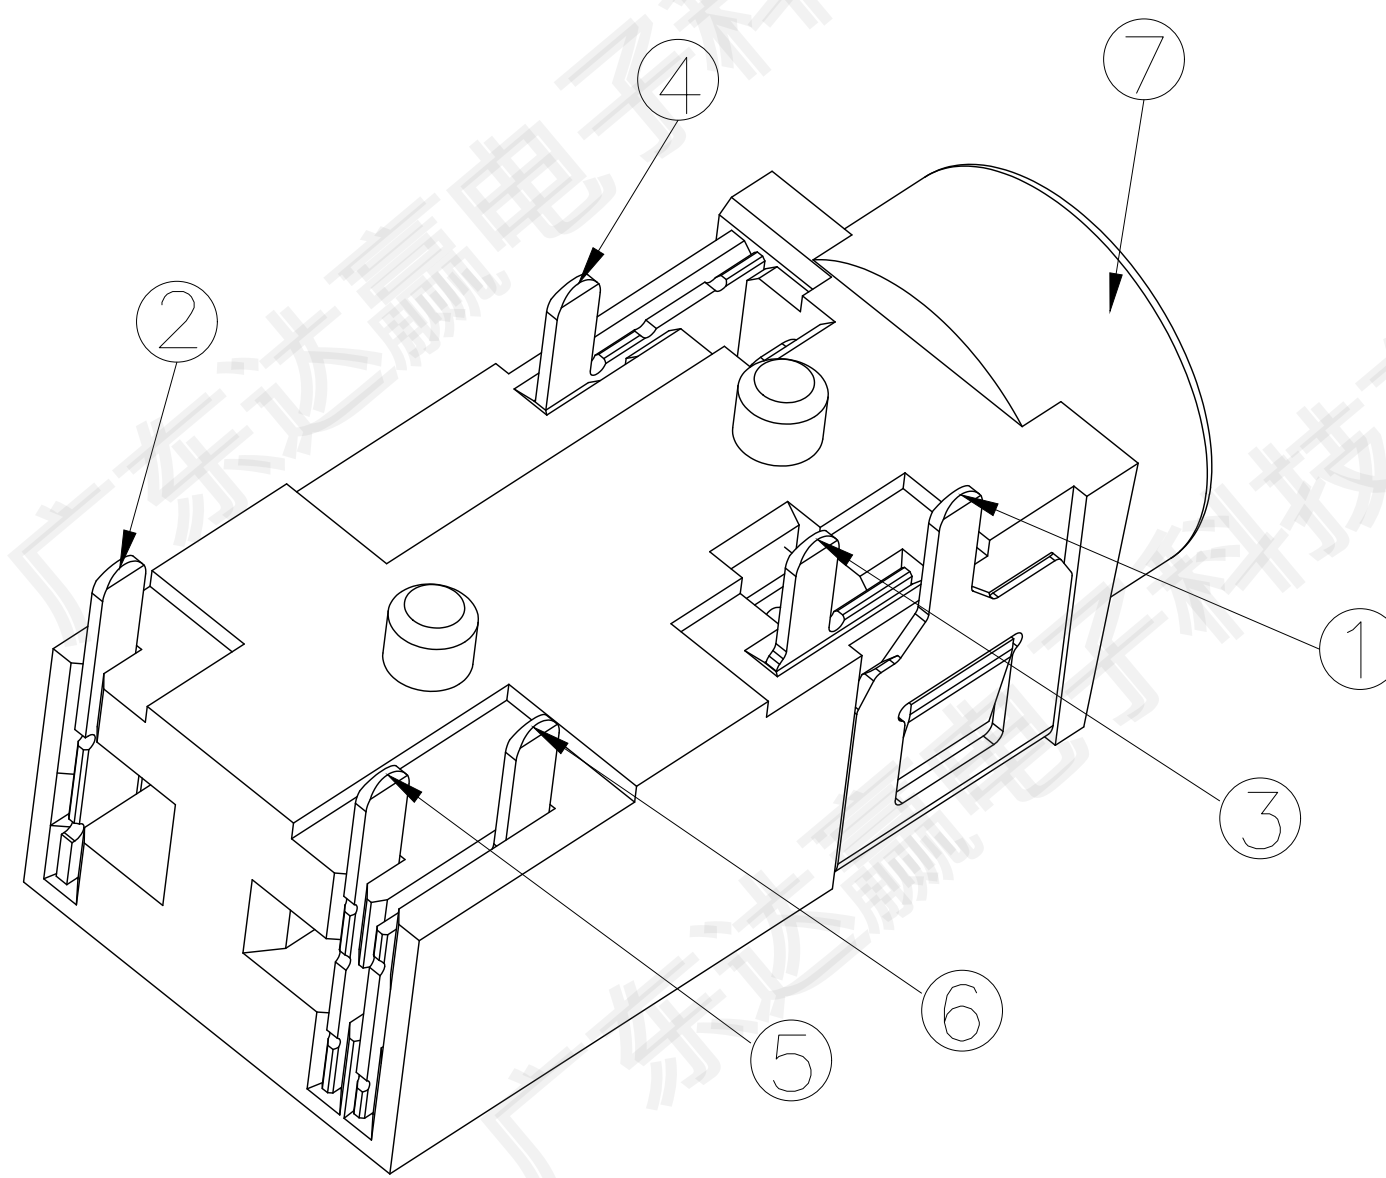
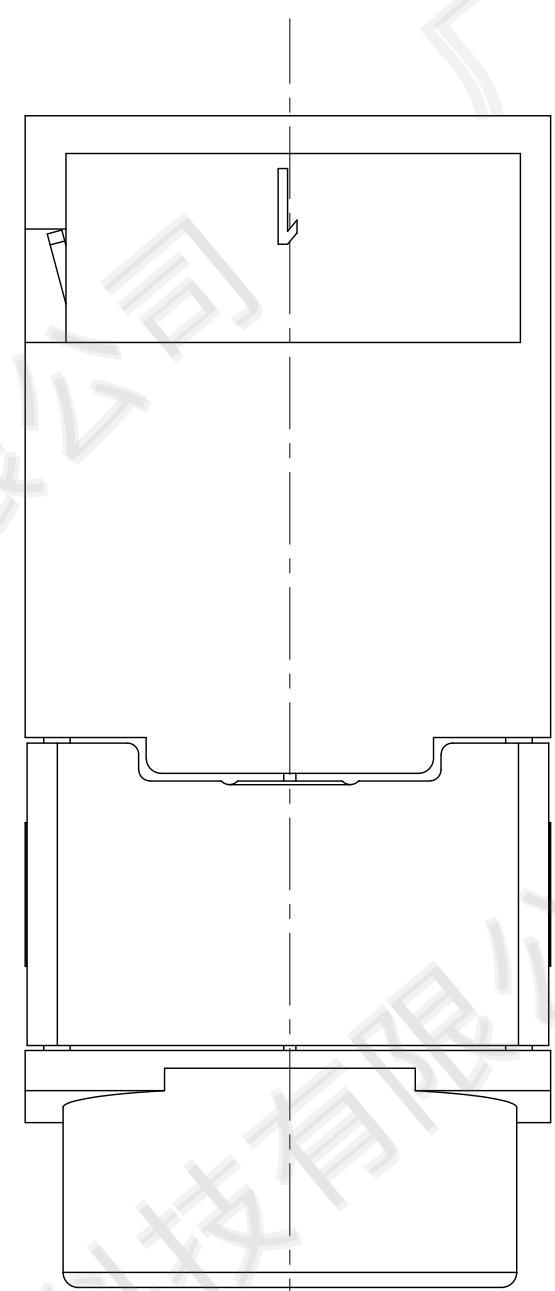


MODEL NO. :
PJ-D3153A- A □ □ □ AU02 L- RH
(1) (2) (3) (4) (5) (6)

- (1) Series no.
(2) Schematic type: A
(3) Housing color:
BK7=Black
GRG=Green
(4) Terminal plating:
AU02=Plating AU 1" min.
(5) Packing mode:L=Reel packing
(6) Environmental requirements:
Rh=RoHS 2.0 + Halogen Free

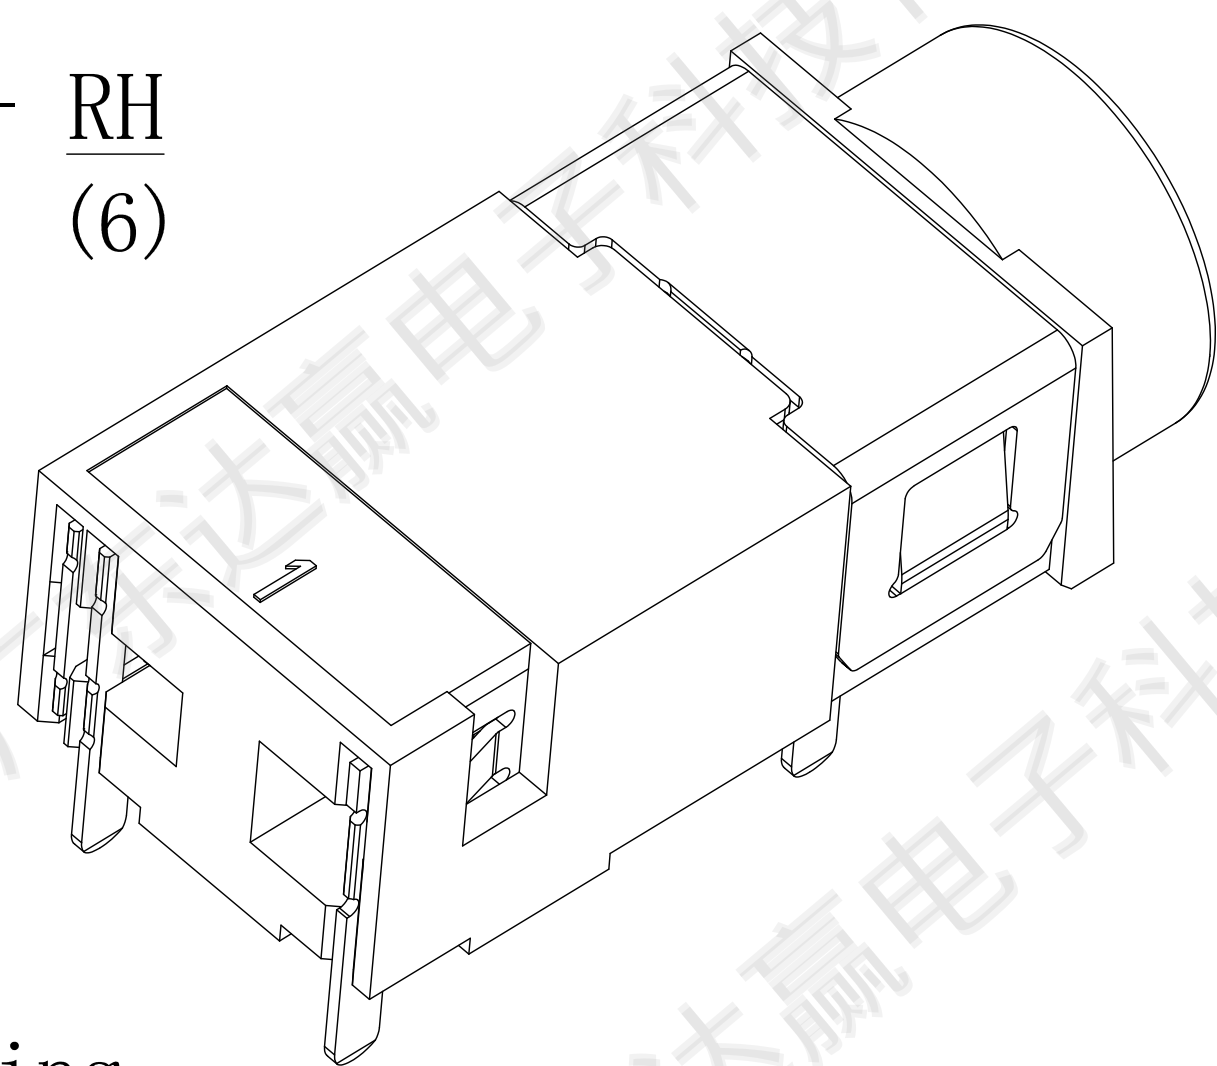

SPECIFICATION:

1. Electrical characteristics
1-1. Current rating: DC 1.0A.
1-2. Voltage rating: DC 12V.
1-3. Contact resistance: 50mΩ max.
1-4. Insulation resistance: 100MΩ min. at 500V DC.
1-5. Withstanding voltage: 500V AC for 1 minute.
2. Mechanical characteristics
2-1. Life test: 5000 cycles min,
2-2. Mating force: 3~30N,
Unmating force: 3~30N.
3. Salt spray test time: 48 hours min.


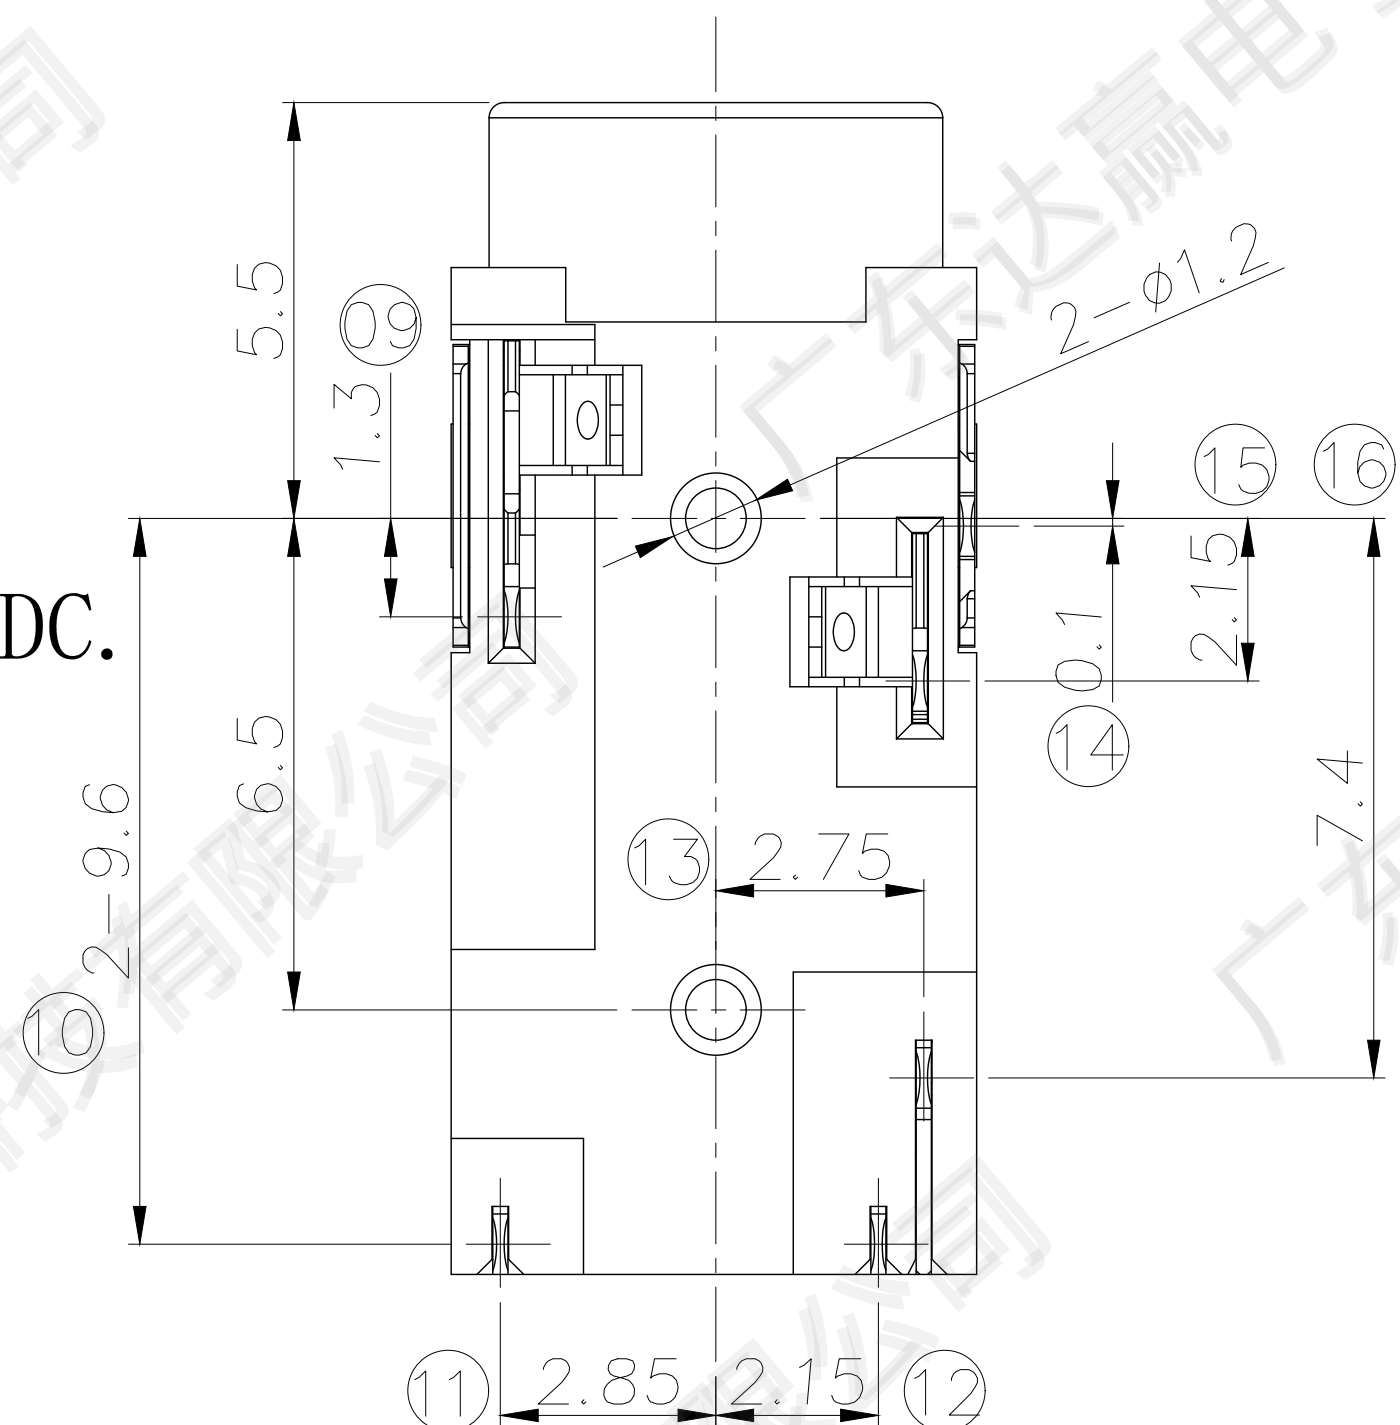


TABLE:

2	PJ-D3153A-AGRGAU02L-RH	粉绿 (577C)
1	PJ-D3153A-ABK7AU02L-RH	黑色
序号	适用物料编码	物料说明

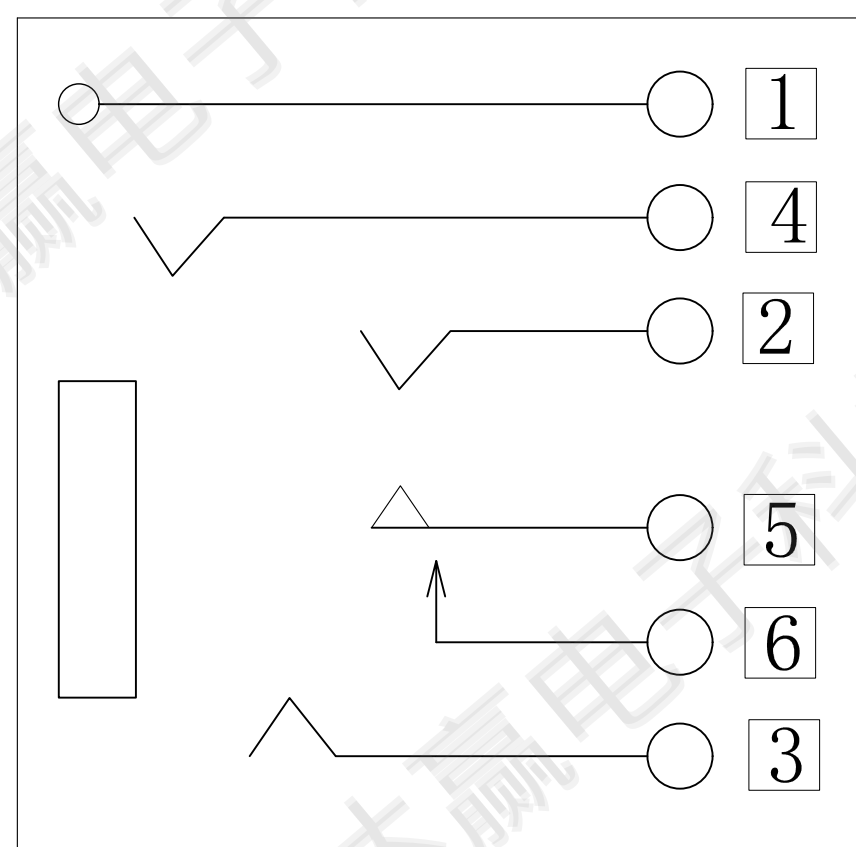

Circuit Diagram

RECOMMENDED P. C. B LAYOUT
TOP VIEW (TOLRANCE: ±0.05)

8	Insulator	1	PA10T R630NH+30%GF UL 94V-0	see table
7	Housing	1	PA10T R630NH+30%GF UL 94V-0	see table
6	Shunt	1	C5210R-EH, 0.20t	Gold Flash On Contact Area And Solder Tail , All over Nickel Plated
5	Transfer spring	1	C5210R-EH, 0.20t	
4	Ring spring	1	C5210R-EH, 0.20t	
3	Ring spring	1	C5210R-EH, 0.20t	
2	Tip spring	1	C5210R-EH, 0.20t	
1	Earth spring	1	C5191R-H, 0.20t	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK



广东达赢电子科技有限公司
Guangdong DaYing Electronic Technology Co., Ltd.

TITLE: **Φ3.5mm PHONE JACK**
MODEL NO. **PJ-D3153A-A□□□ AU02L- RH**
FILE NO. **Q/SSY.QW-001A-0496**

					Angle	±2°	DESIGN	王朝荣	2015.03.10	
					10<L≤20	±0.3	CHECK			
					5<L≤10	±0.25	APPROVAL			
	A-0	2014.12.24	NEW	王朝荣	余军	L≤5	±0.20			
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: 3:1	UNIT:mm	A4