

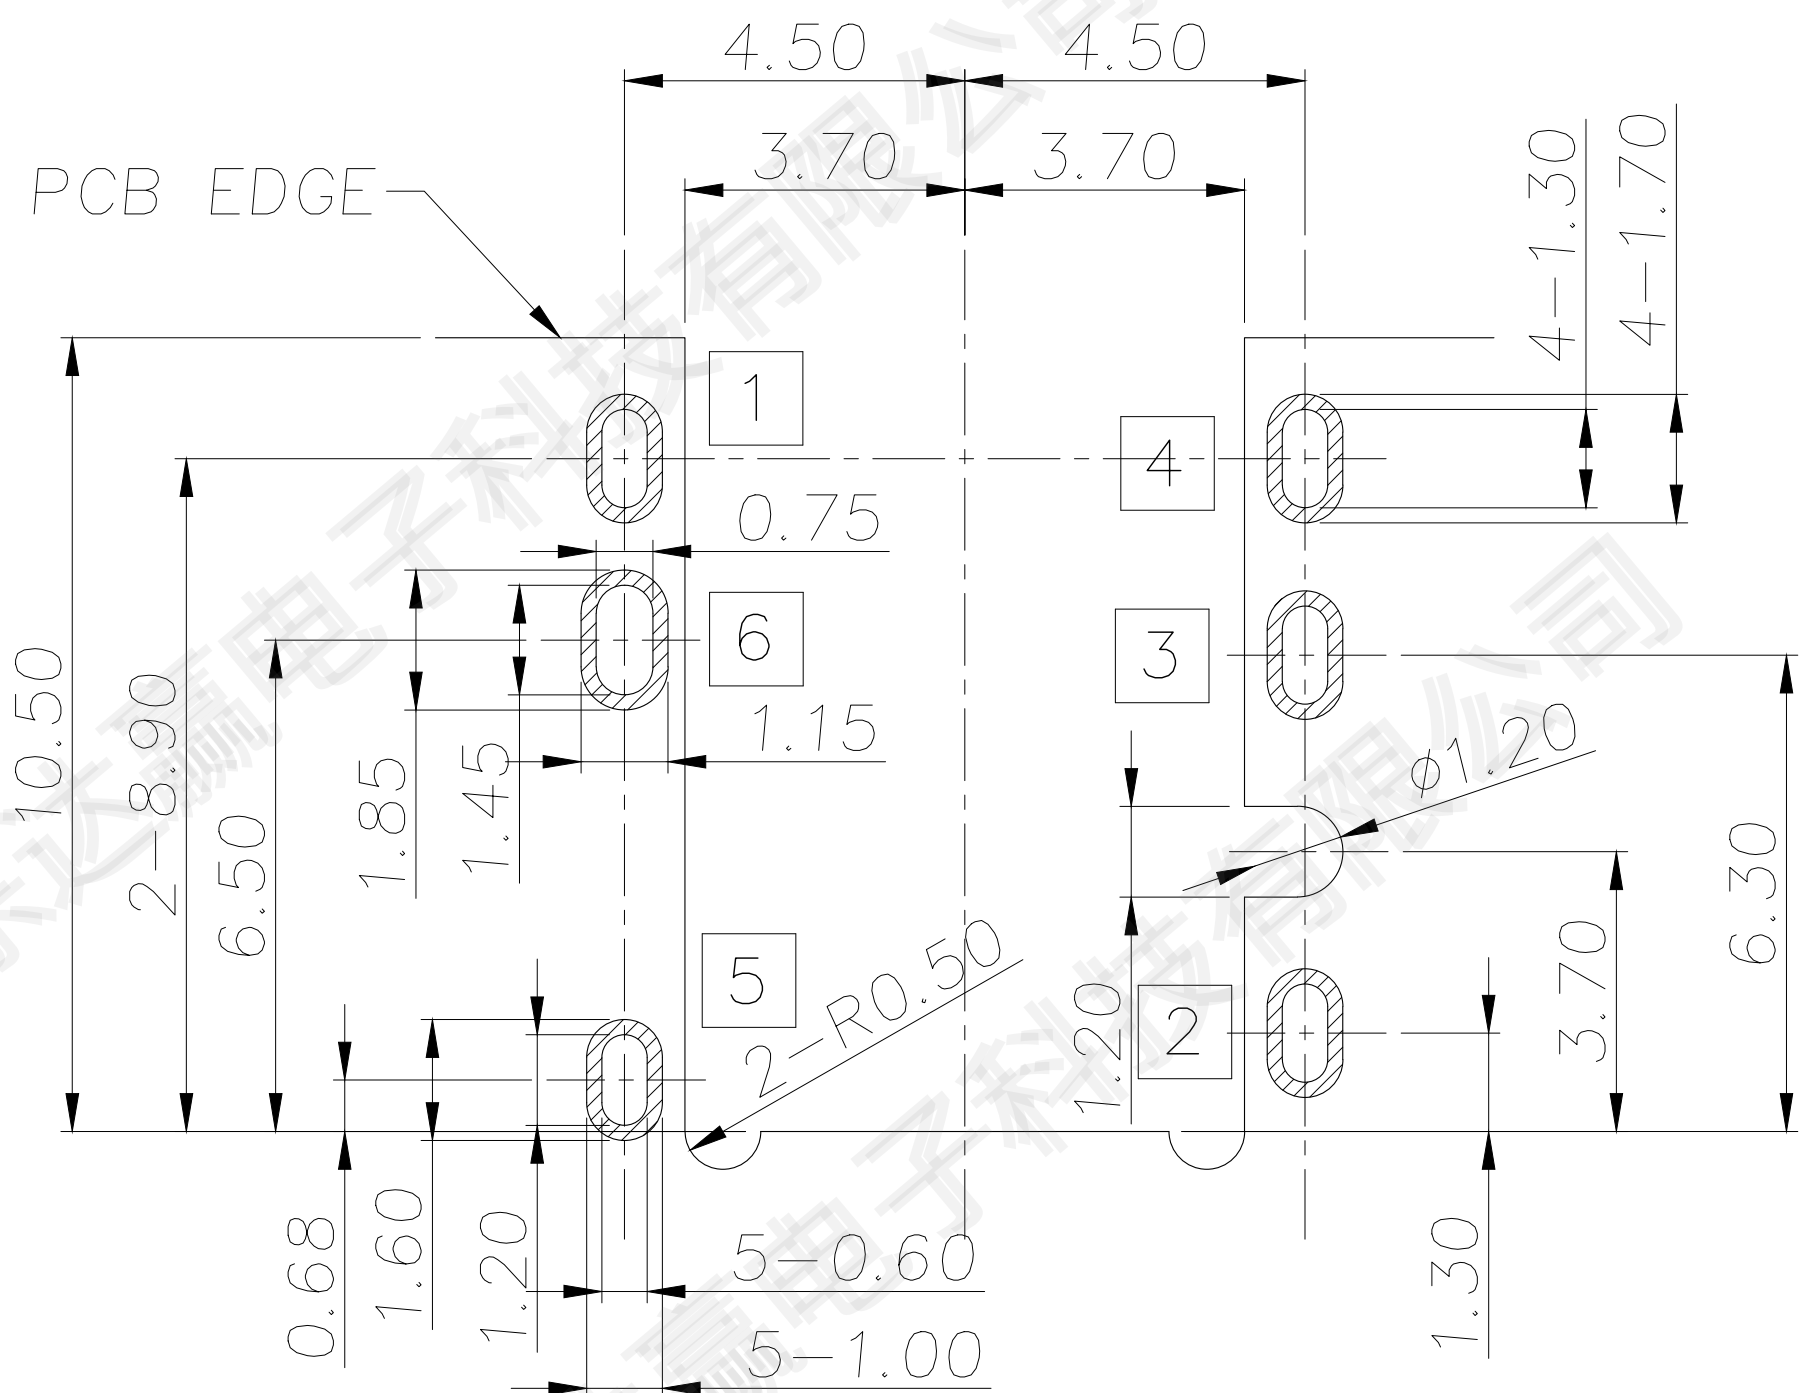
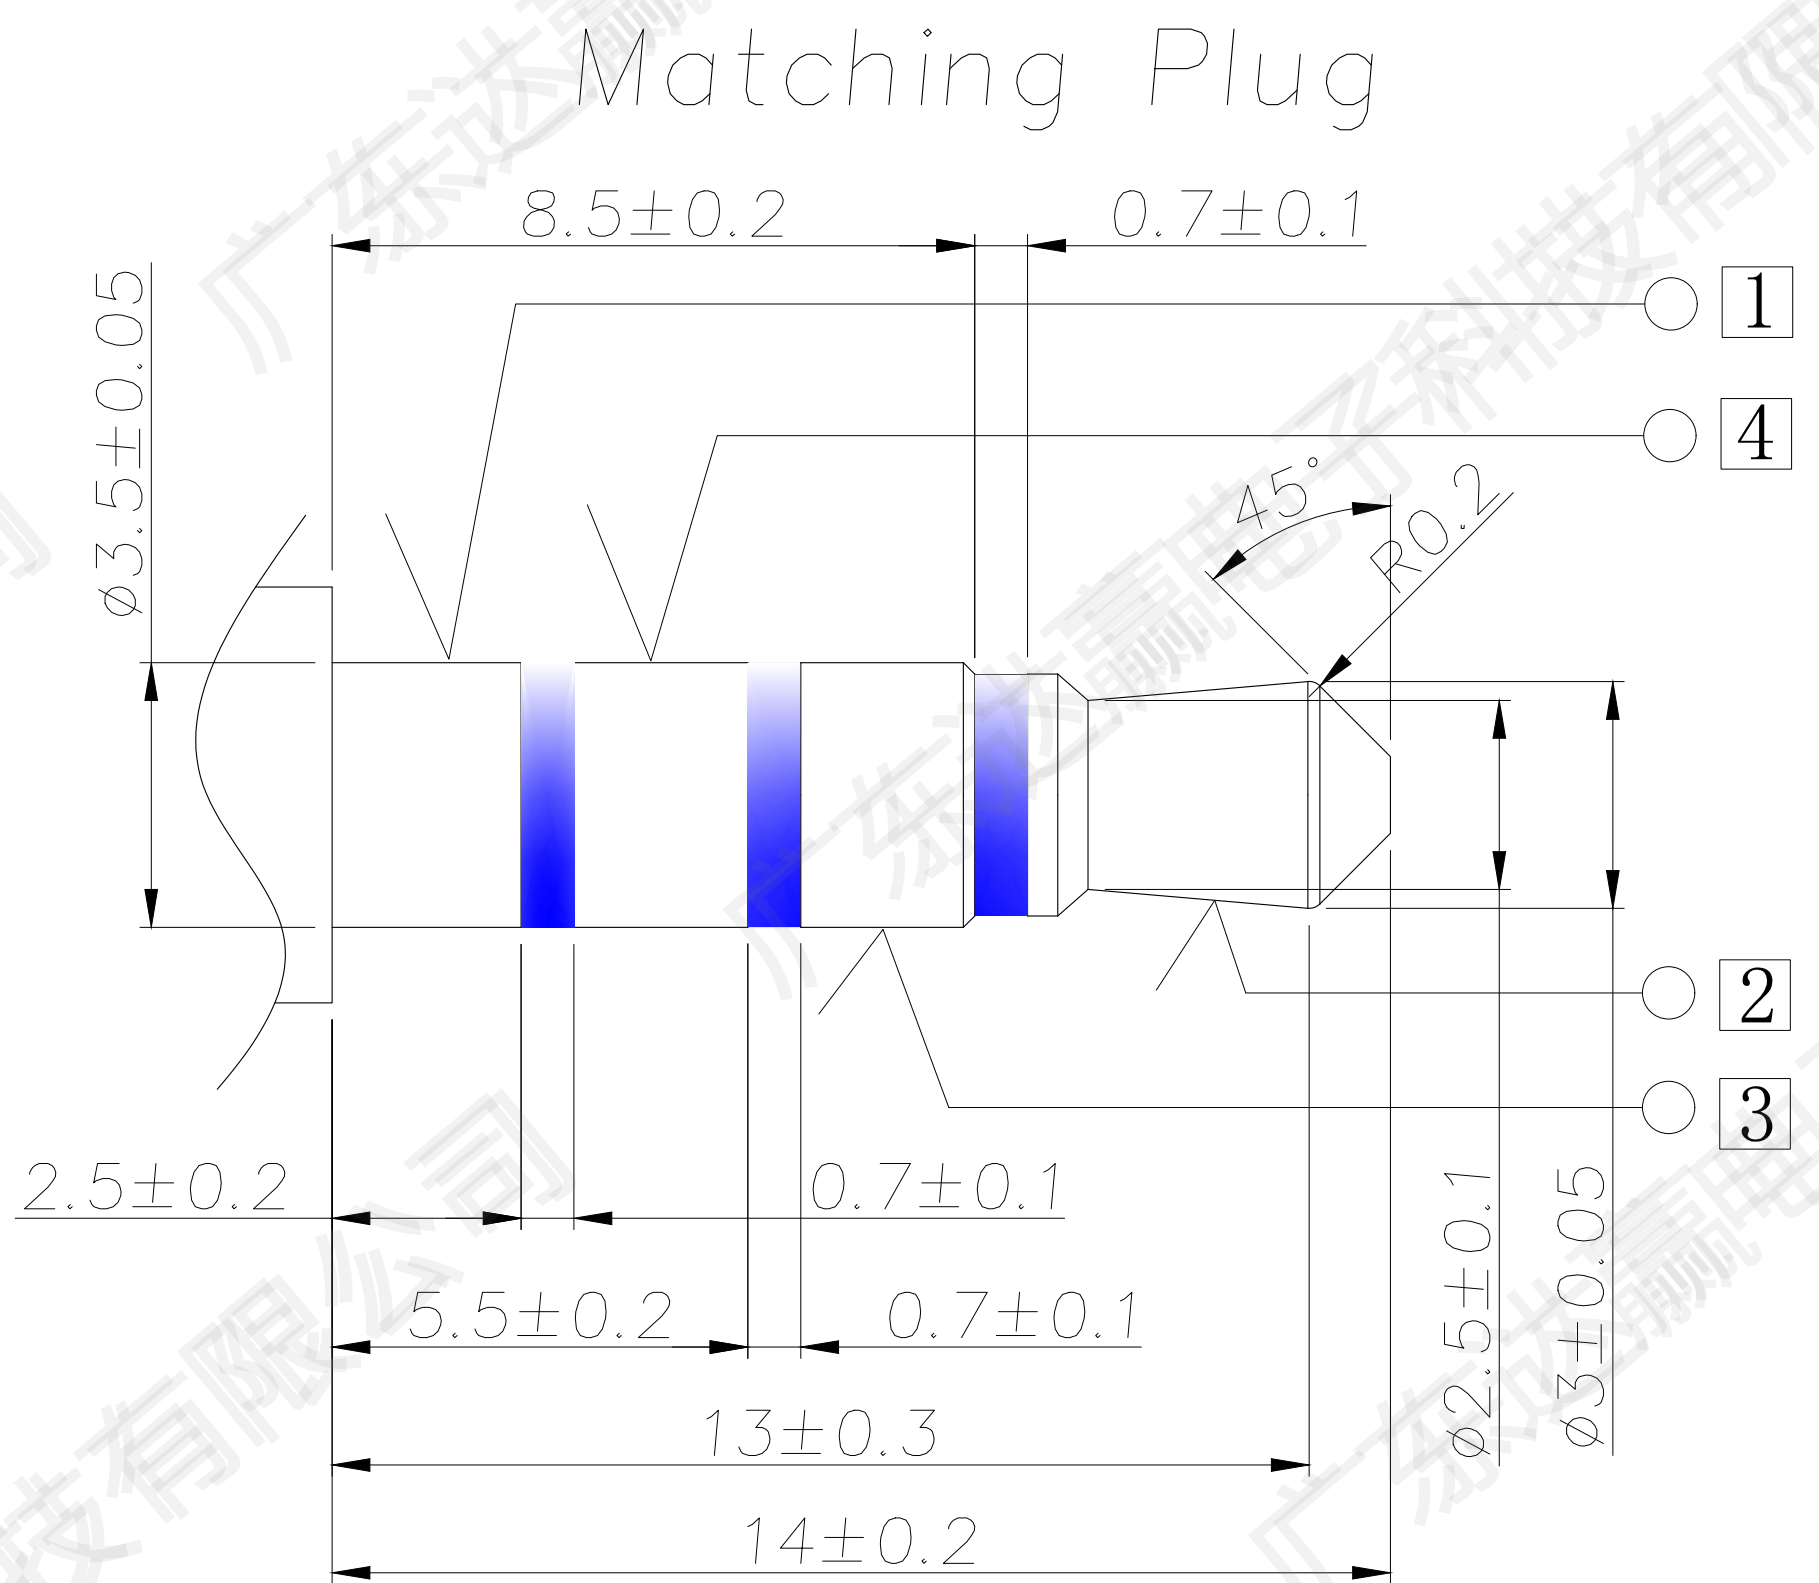
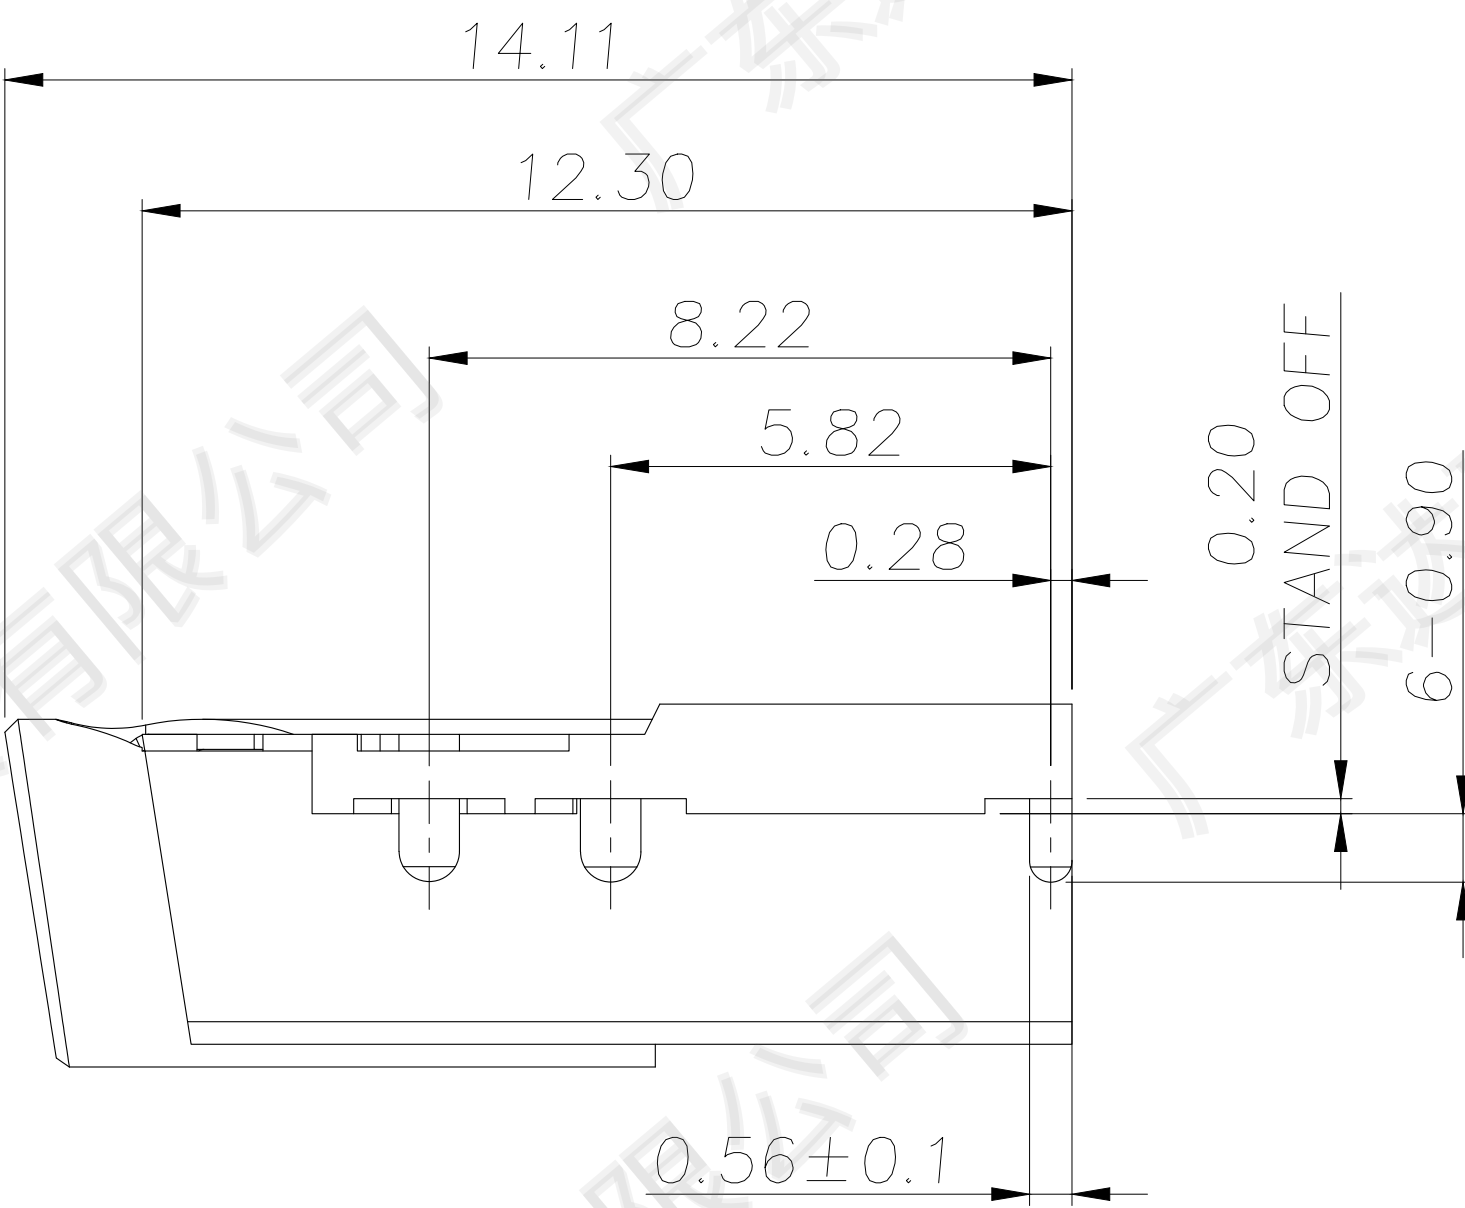
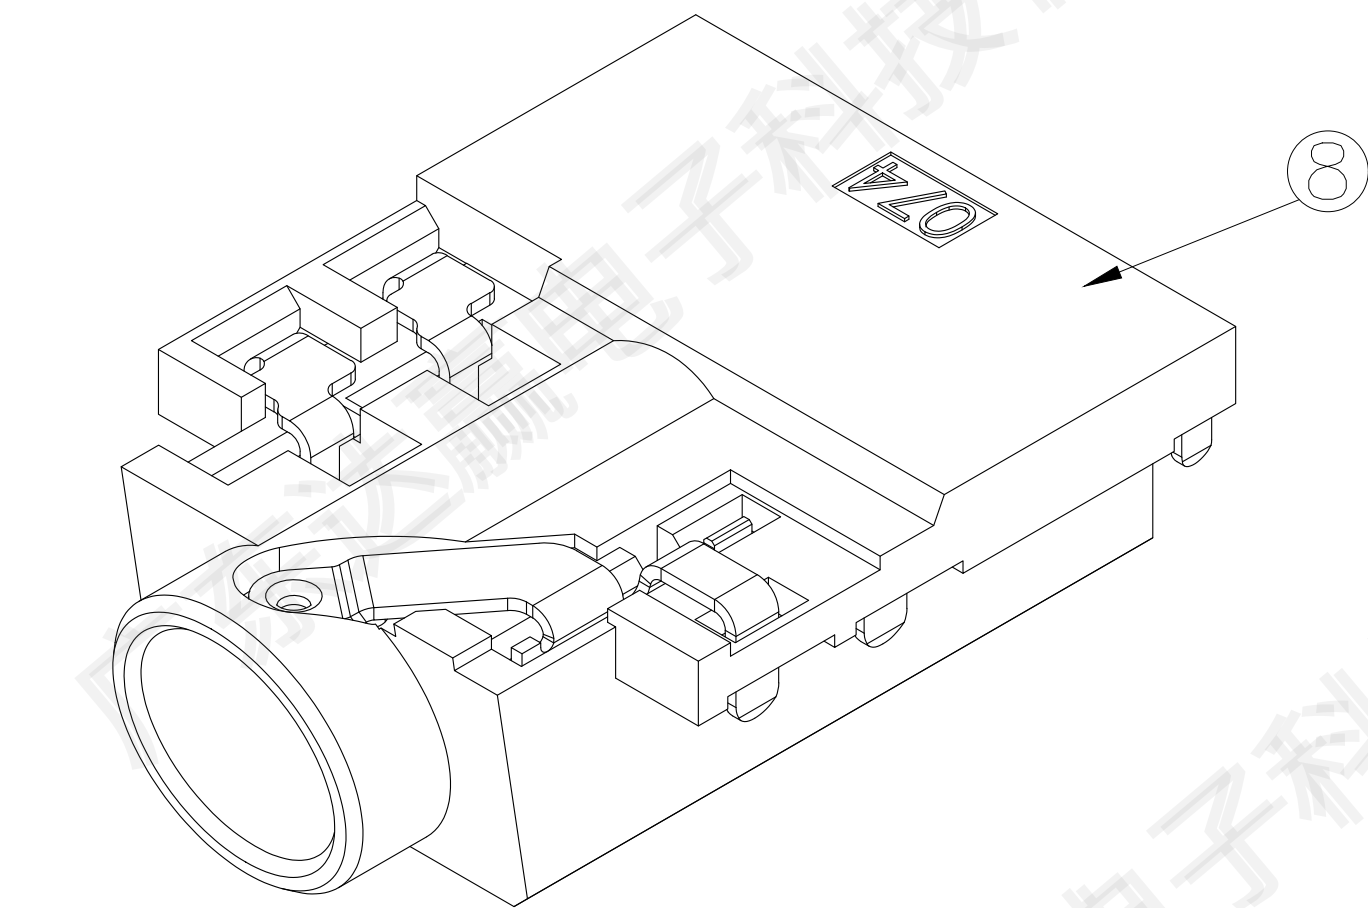
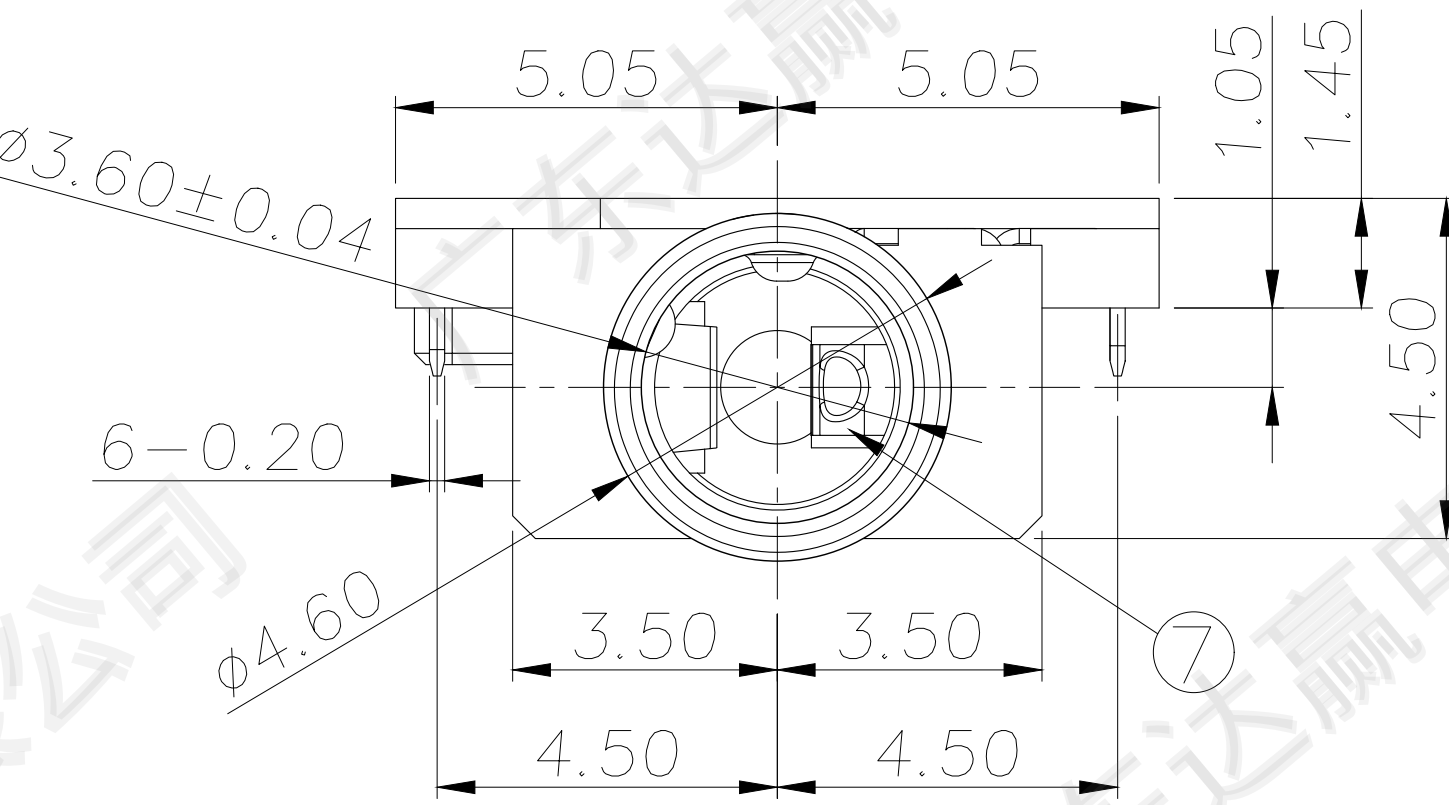
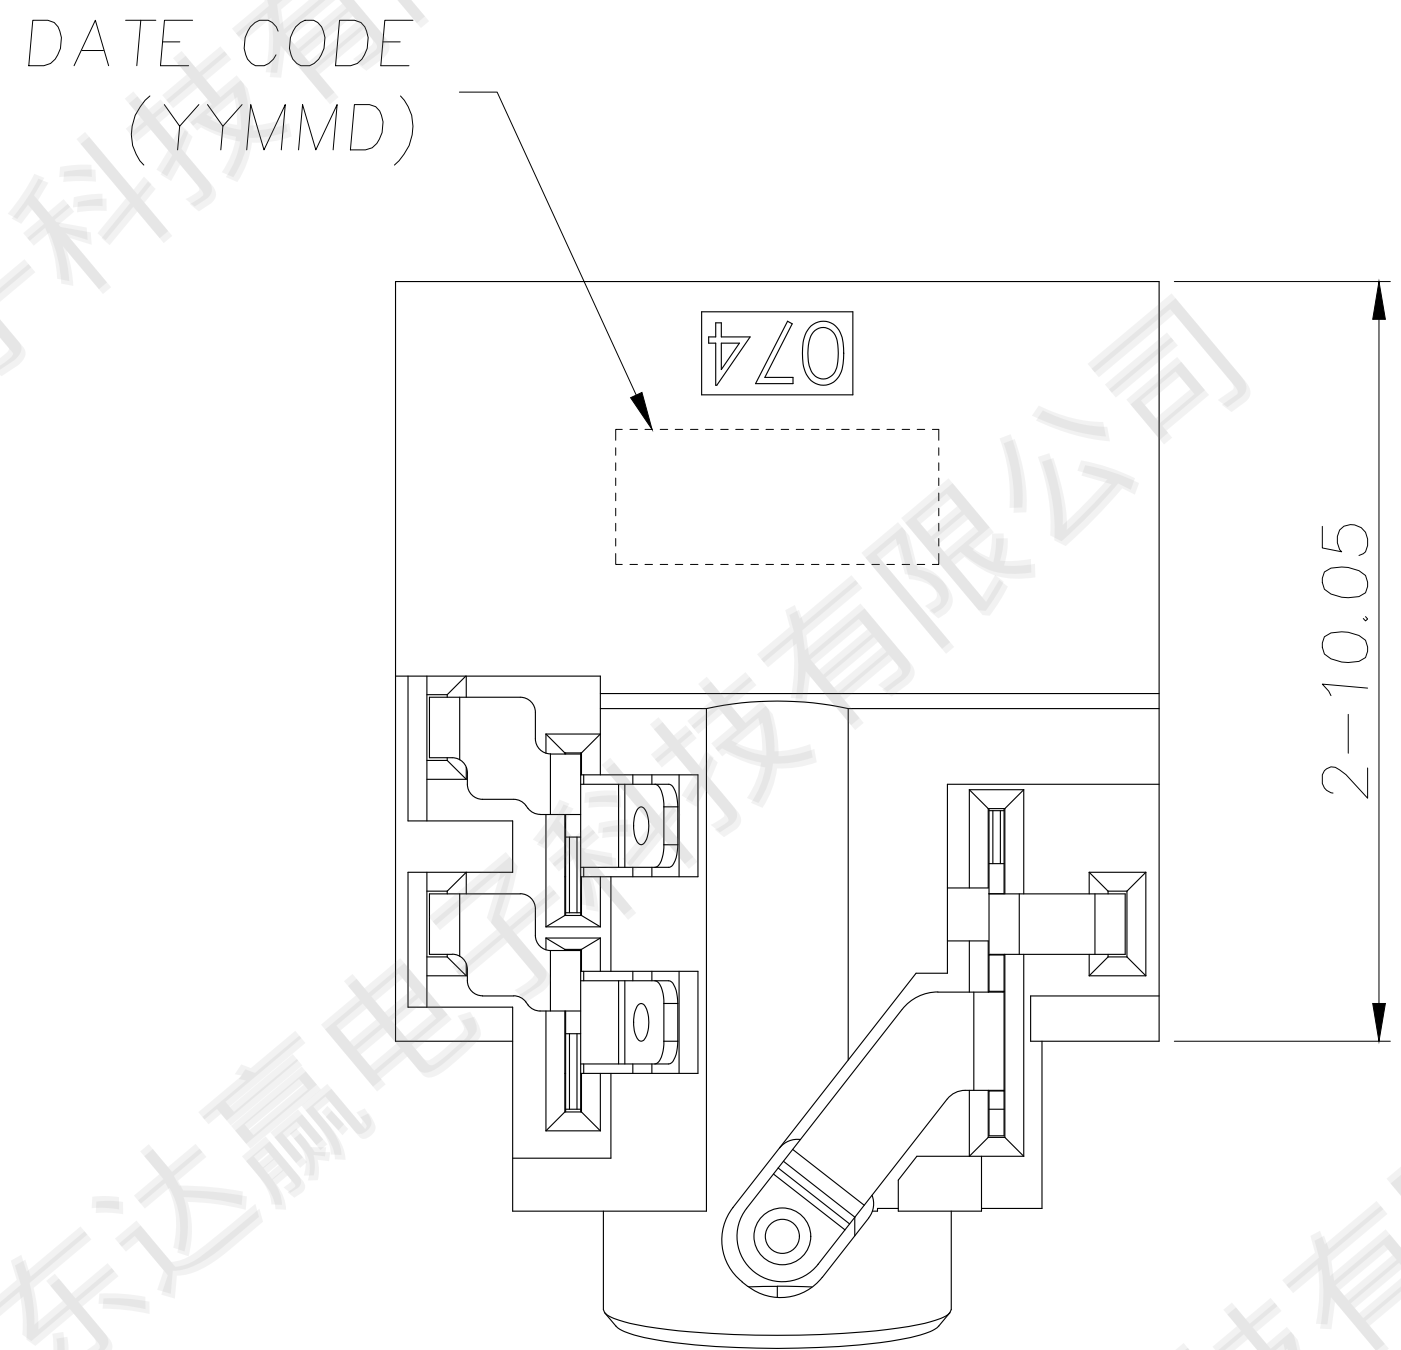
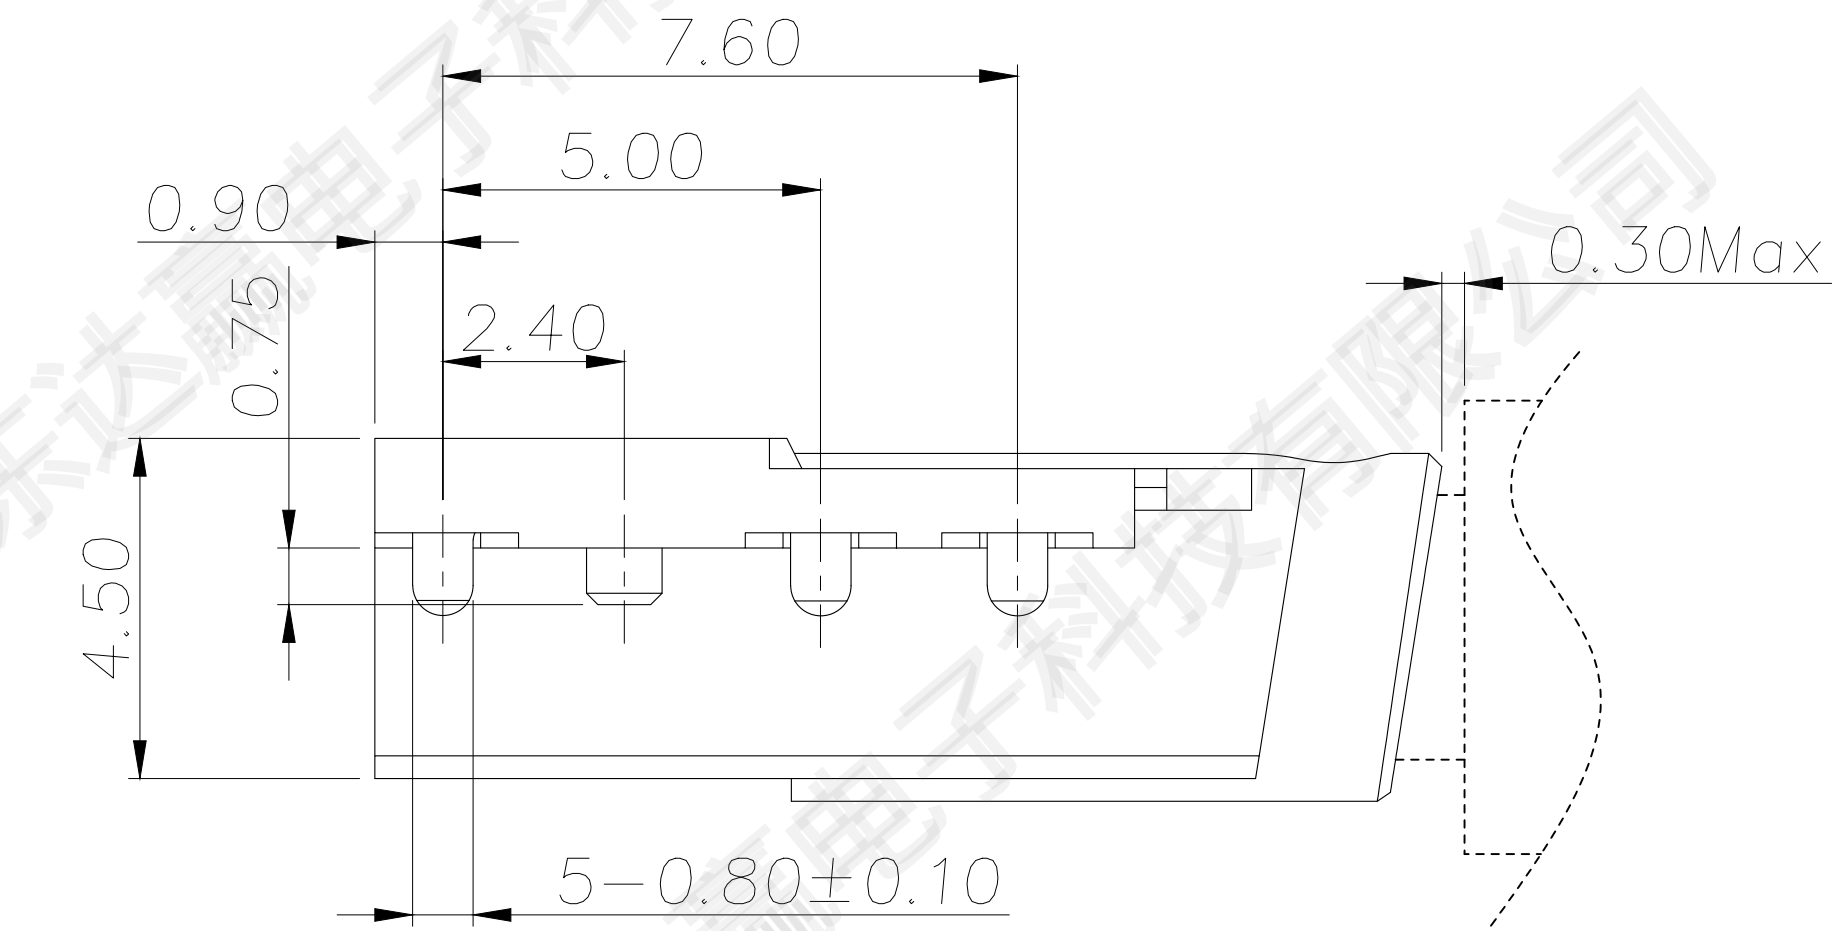


MODEL NO. :
PJ-D3261M - A BK7 AS02 L - RH
(1) (2) (3) (4) (5) (6)

- (1) Series no.
(2) Schematic type: A
(3) Housing color:
BK7=Black
(4) Terminal plating:
AS02=Plating Tin/Gold Flash
(5) Packing mode:L=Reel packing
(6) Environmental requirements:
RH=RoHS 2.0 + Halogen Free

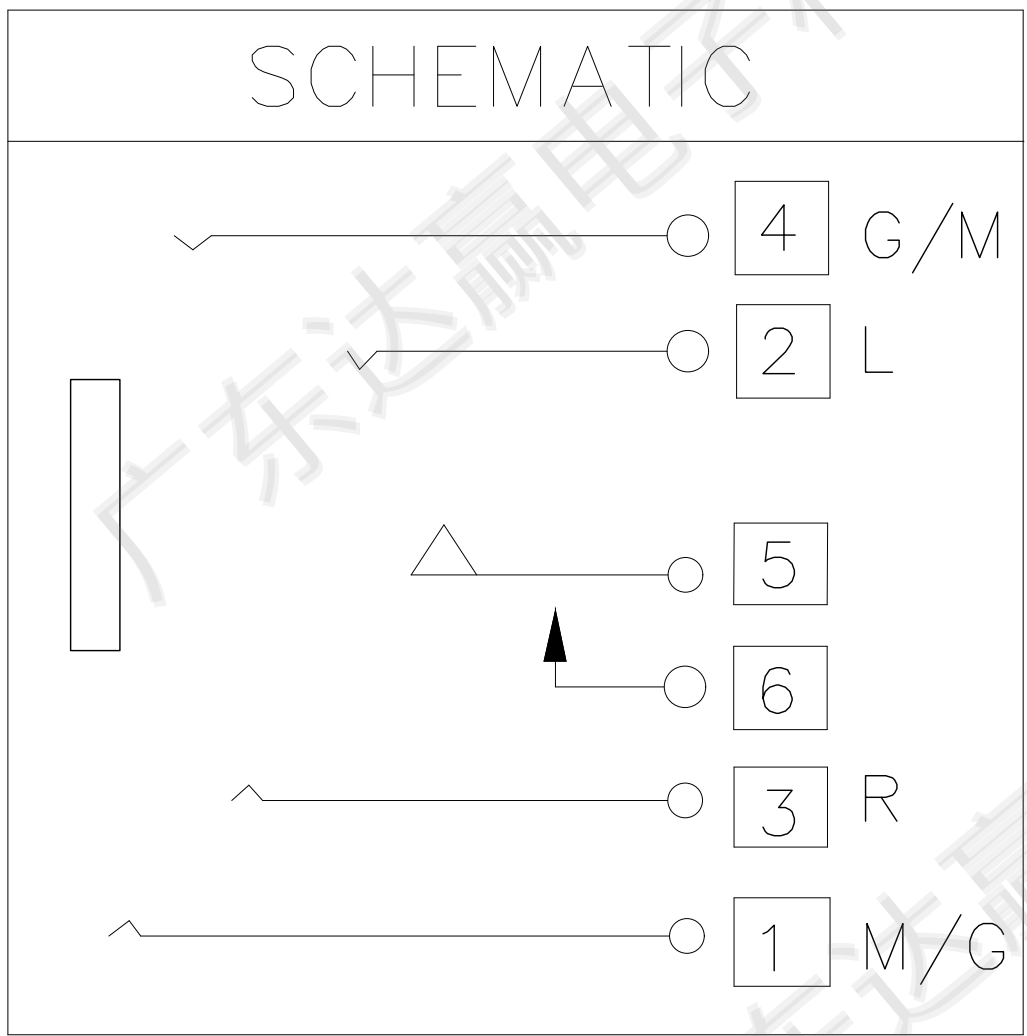

- SPECIFICATION:
1. Electrical characteristics
- 1-1. Current rating: DC 1A
- 1-2. Voltage rating: DC 12V.
- 1-3. Contact resistance: 50mΩ max.
- 1-4. Insulation resistance: 100MΩ min. at 500V DC.
- 1-5. Withstanding voltage: 500V AC for 1 minute.
2. Mechanical characteristics
- 2-1. Insertion force: 8~30N, Initial 25N MAX. After the 2000th
- 2-2. Withdrawal force: 6~18N, Initial 5N Min. After the 2000th
- 2.3. After life test Contact resistance: 100mΩ max.
- 2.4. After life test Insulation resistance: 50mΩ min.

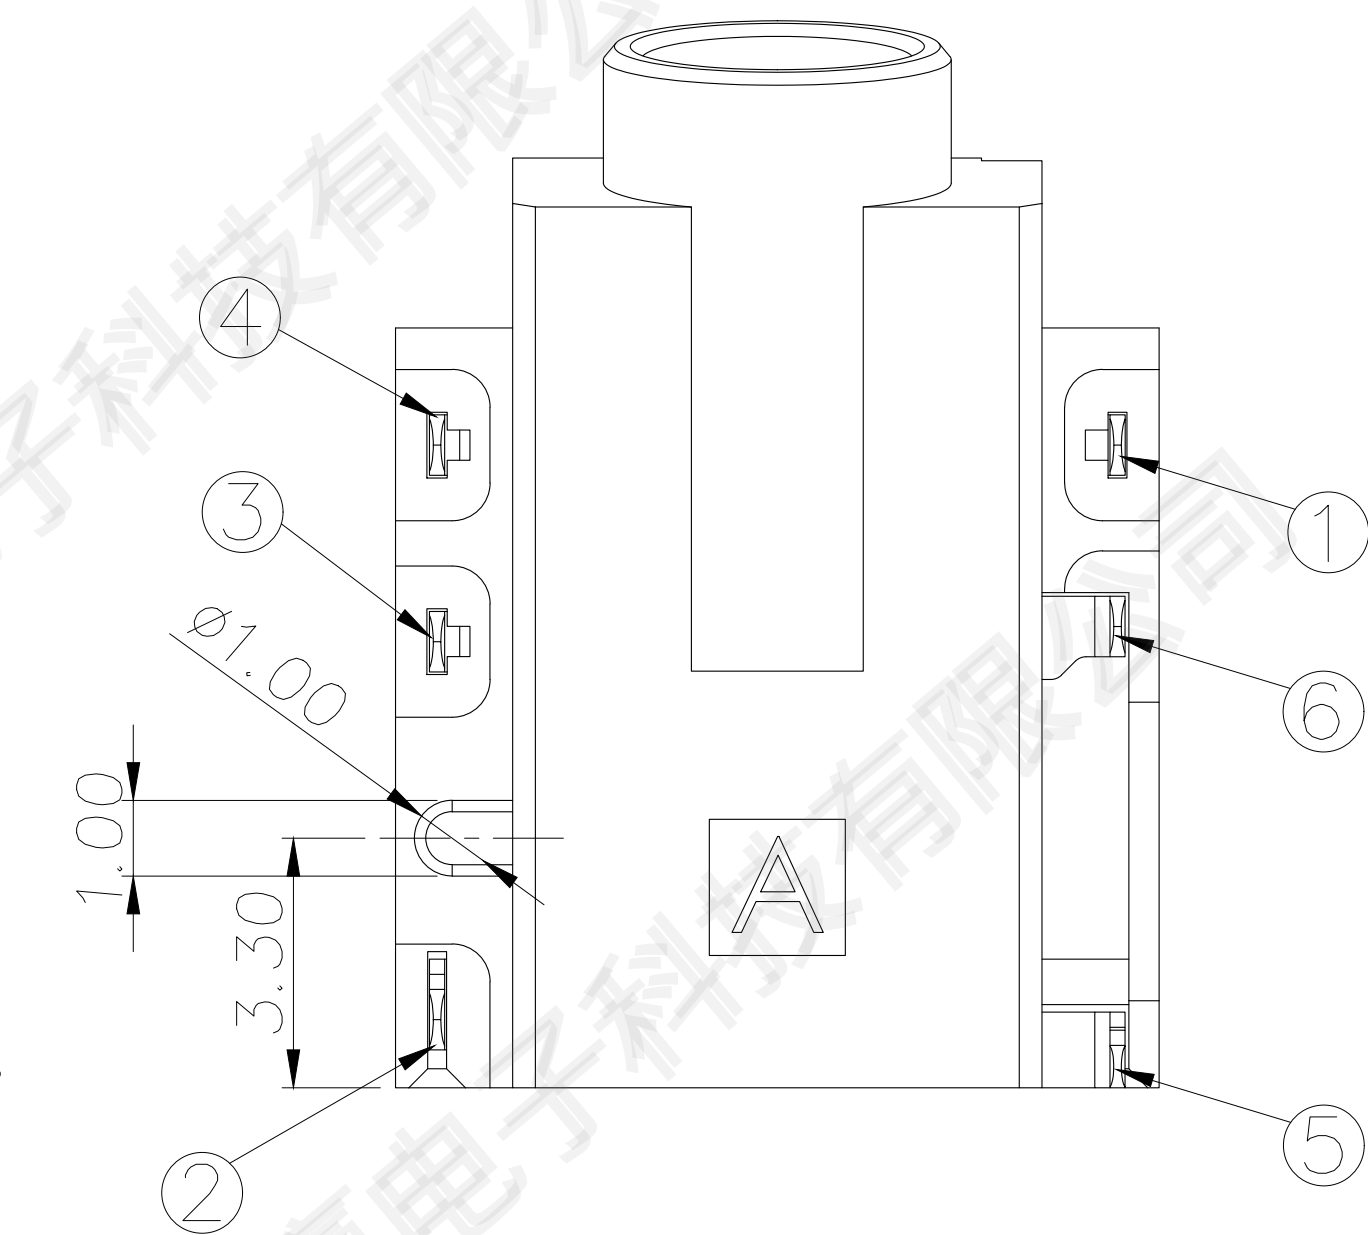

RECOMMENDED P. C. B LAYOUT (t=1.0mm)
TOP VIEW (TOLRANCE: ±0.05)

8	Housing	1	PA10T,UL,94V-0	Black
7	Insulator	1	PA10T,UL,94V-0	Black
6	Shunt terminal	1	C5210, 0.20t	Gold Flash On Contact Gold Flash On Solder Tail Area, 50u" Nickel UnderPlated
5	Transfer Spring	1	C5210, 0.20t	
4	Ring spring	1	C5210, 0.20t	
3	Ring spring	1	C5210, 0.20t	Gold Flash On Contact Area 80u" Tin Plating on Solder Tail Area, All over 50u" Nickel Plated
2	Tip spring	1	C5210, 0.20t	
1	Earth spring	1	C5210, 0.20t	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK



广东达赢电子科技有限公司
Guangdong DaYing Electronic Technology Co.,ltd.

CUSTOMER
DRAWING

TITLE:

Ø3.5mm PHONE JACK

MODEL NO.

PJ-D3261M-ABK7AS02L-RH

FILE NO.

Q/DY. QW-001A-0722

						Angle	±2°	DESIGN	罗振强	2020. 04. 23
						. x	±0.38	CHECK		
						. xx	±0.25	APPROVAL		
	A-0	2020. 04. 23	NEW	罗振强	刘 伟	. xxx	±0.10	SCALE: 1:1	UNIT:mm	A4
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED				