
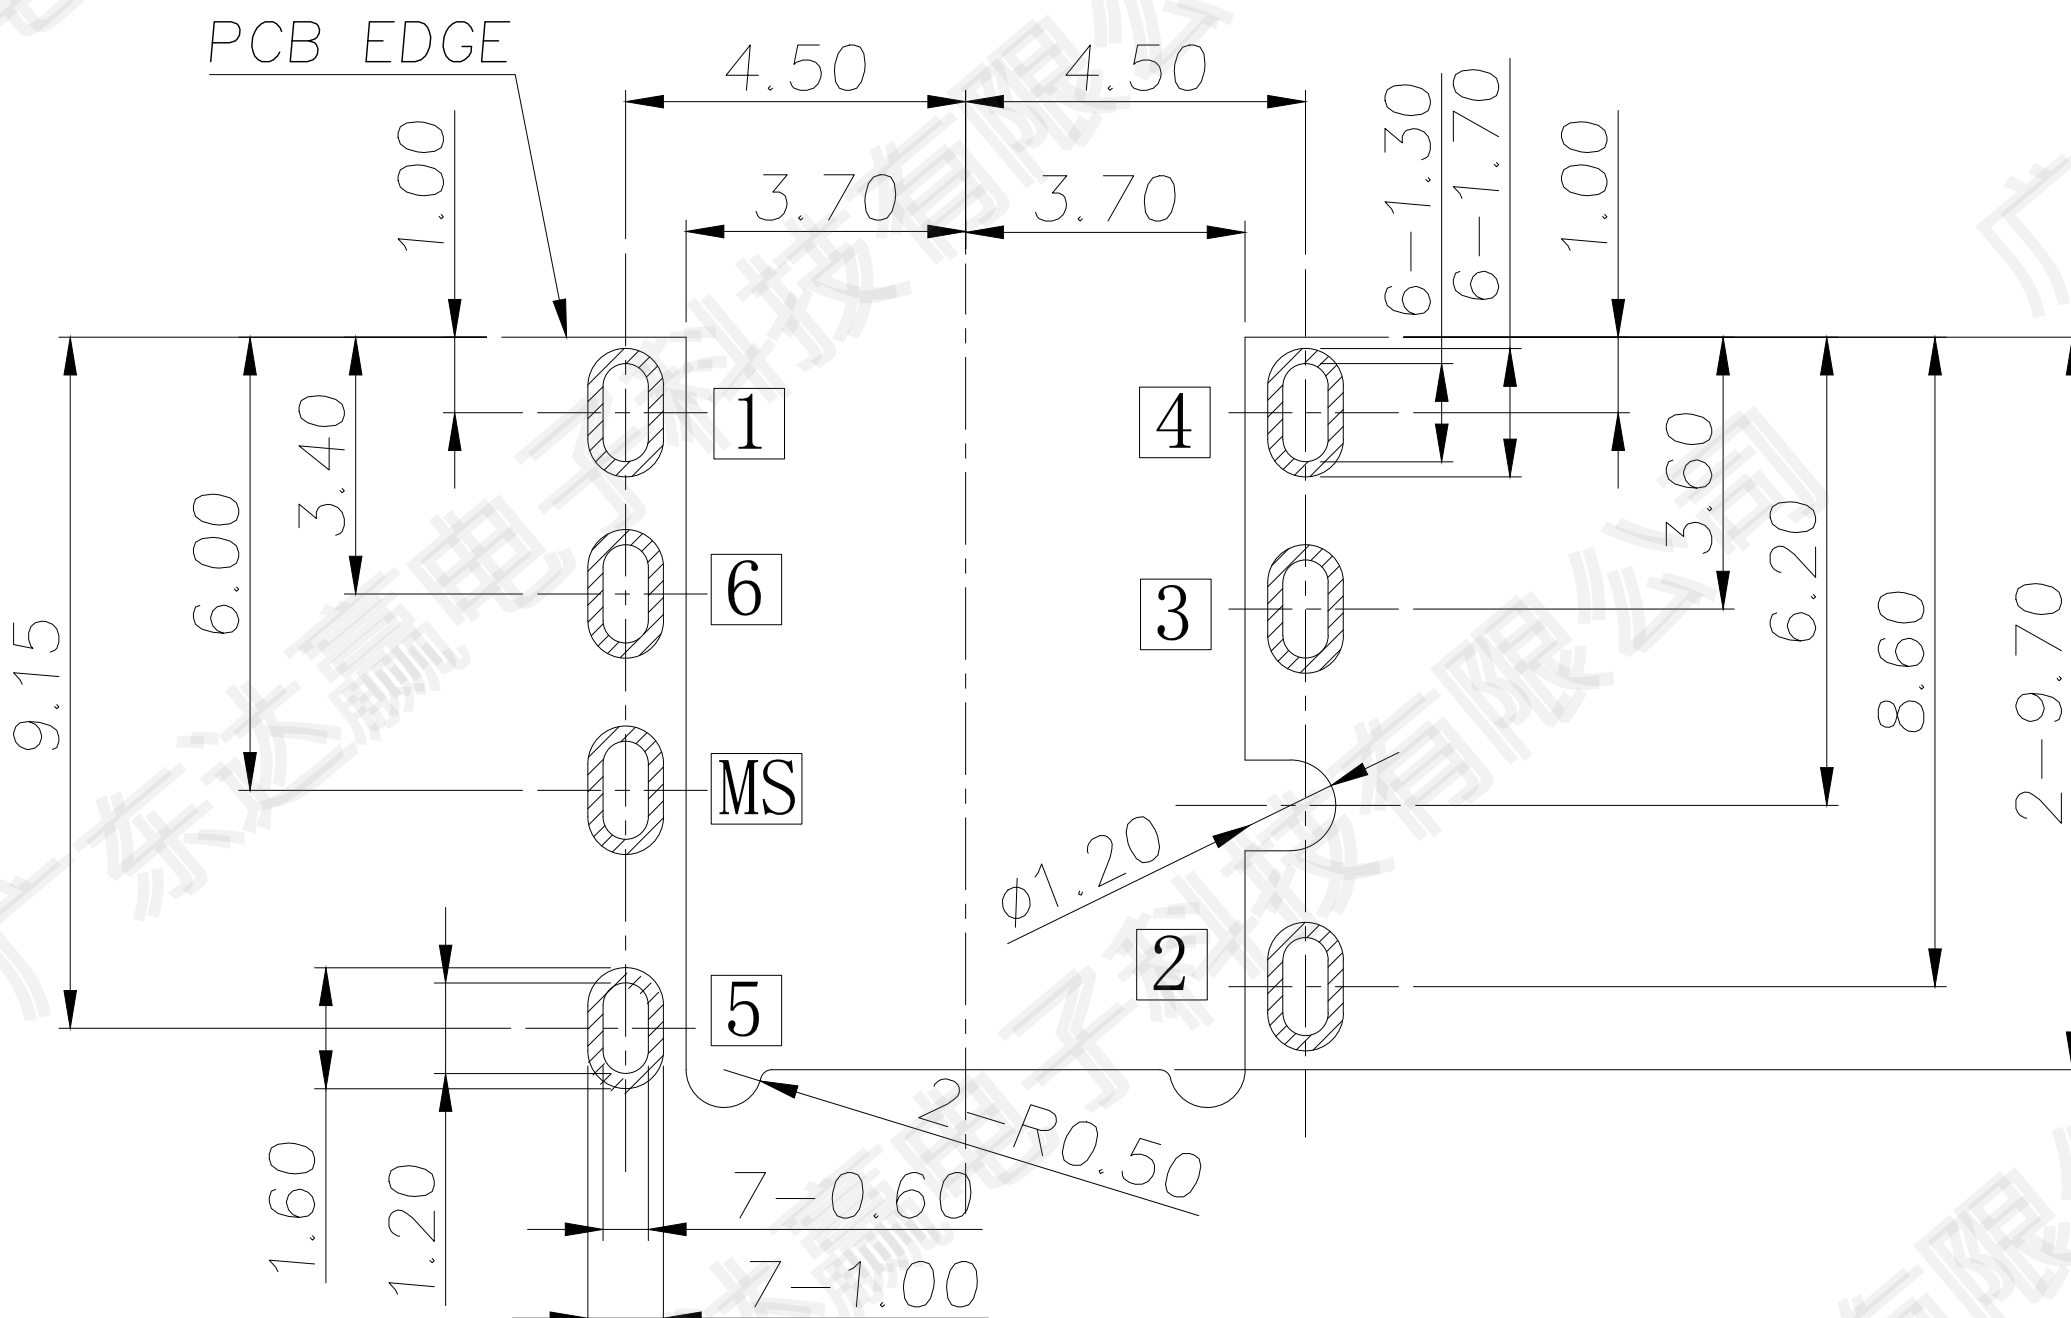
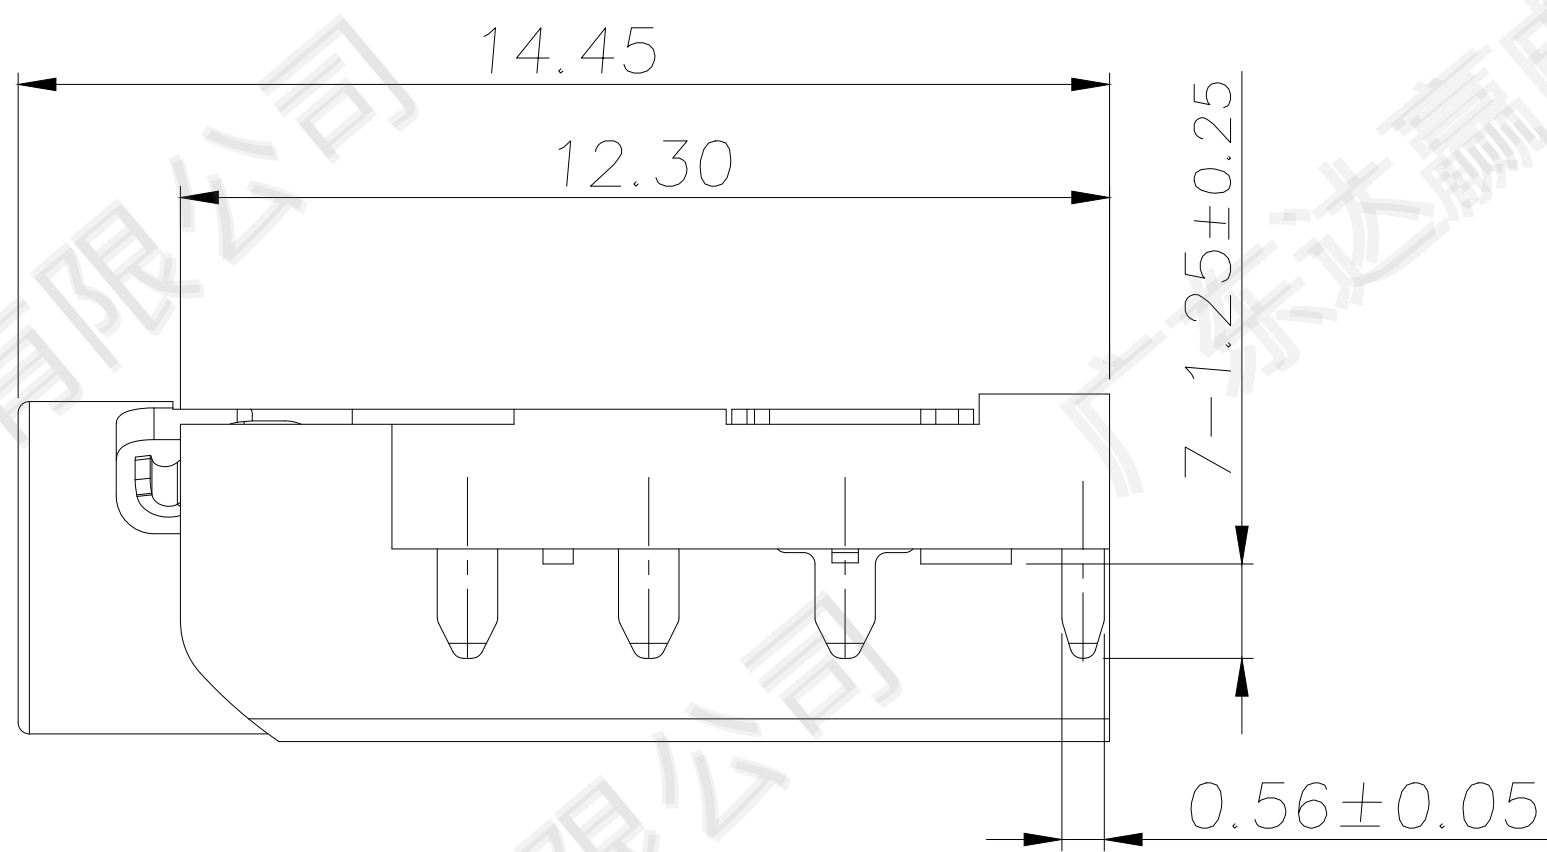
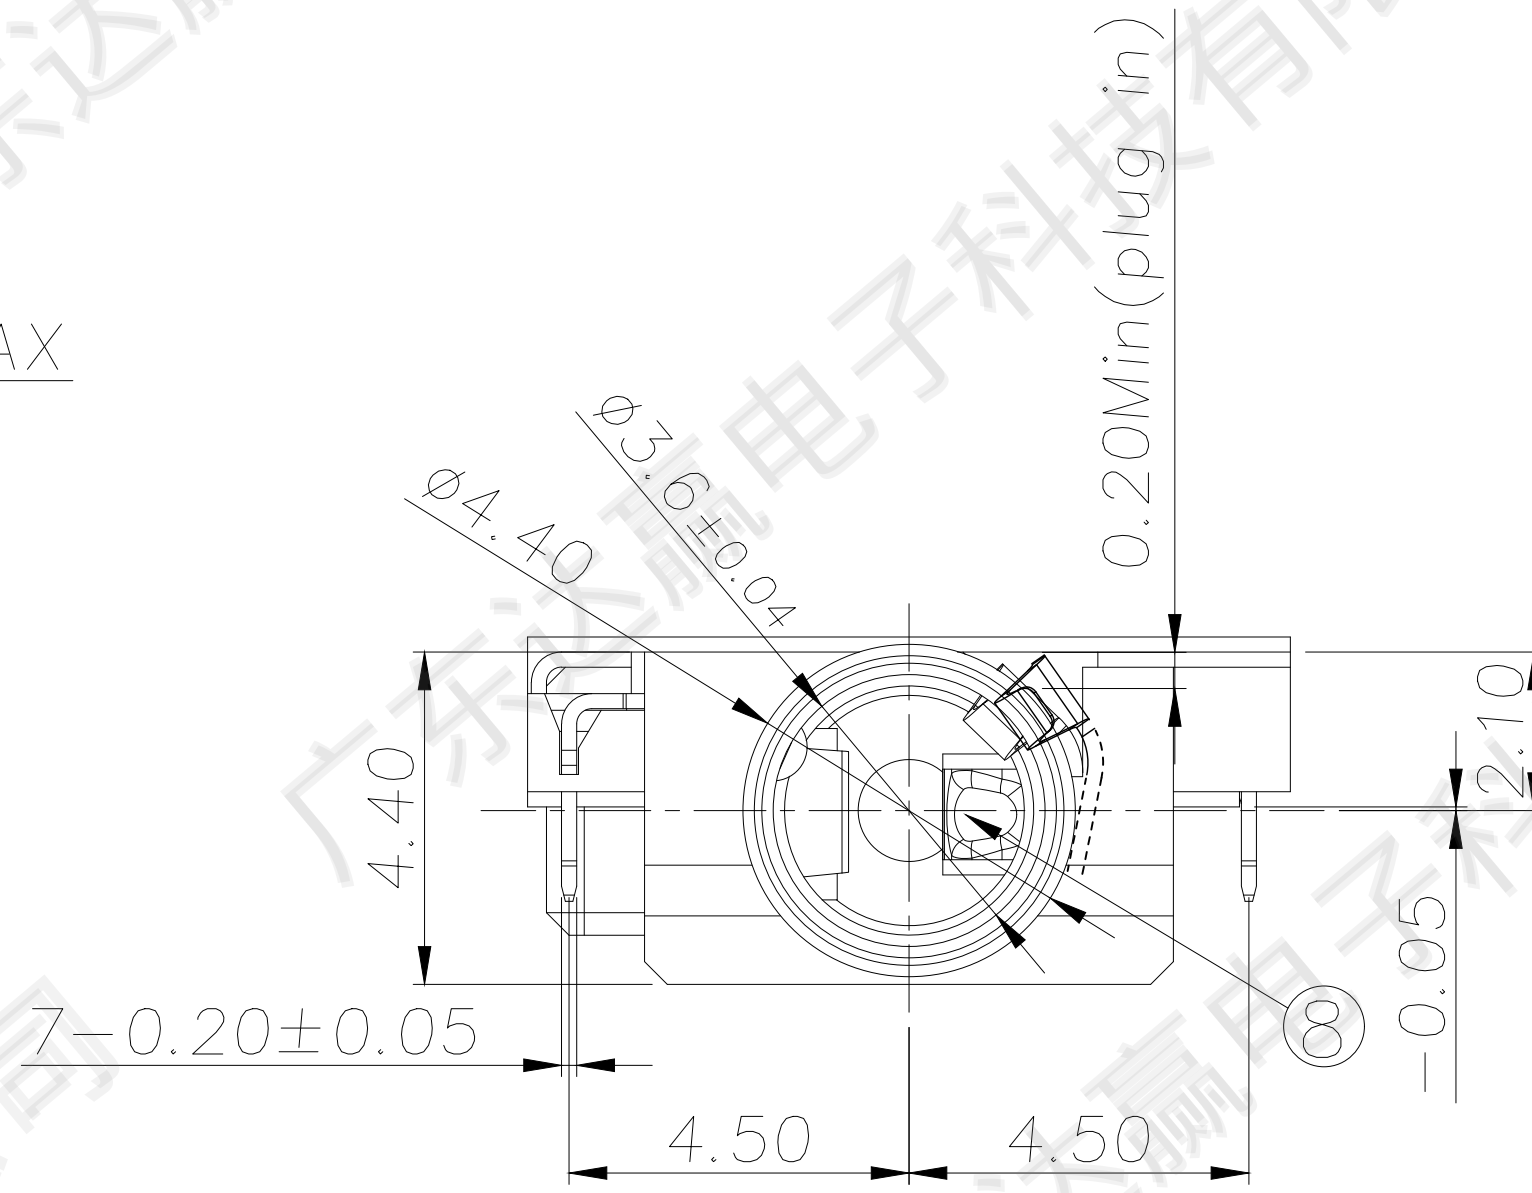
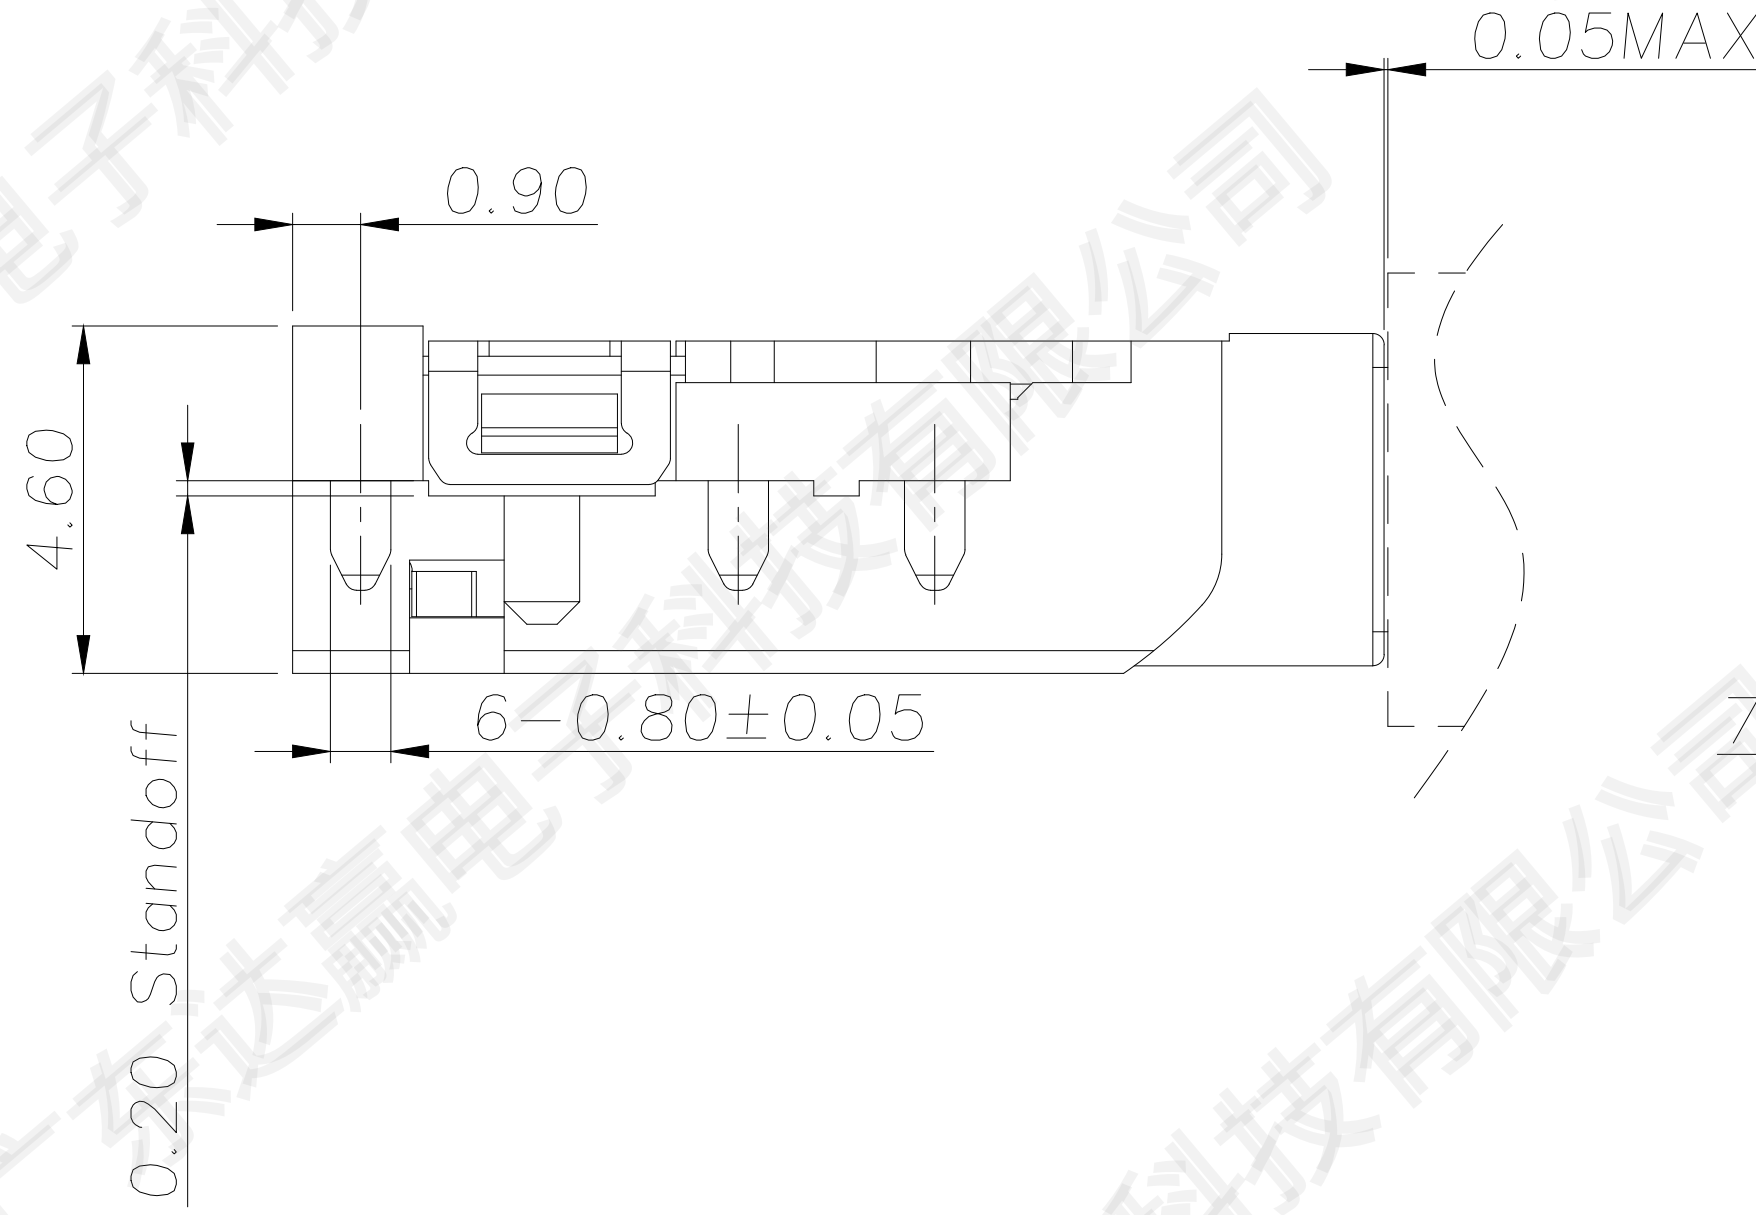
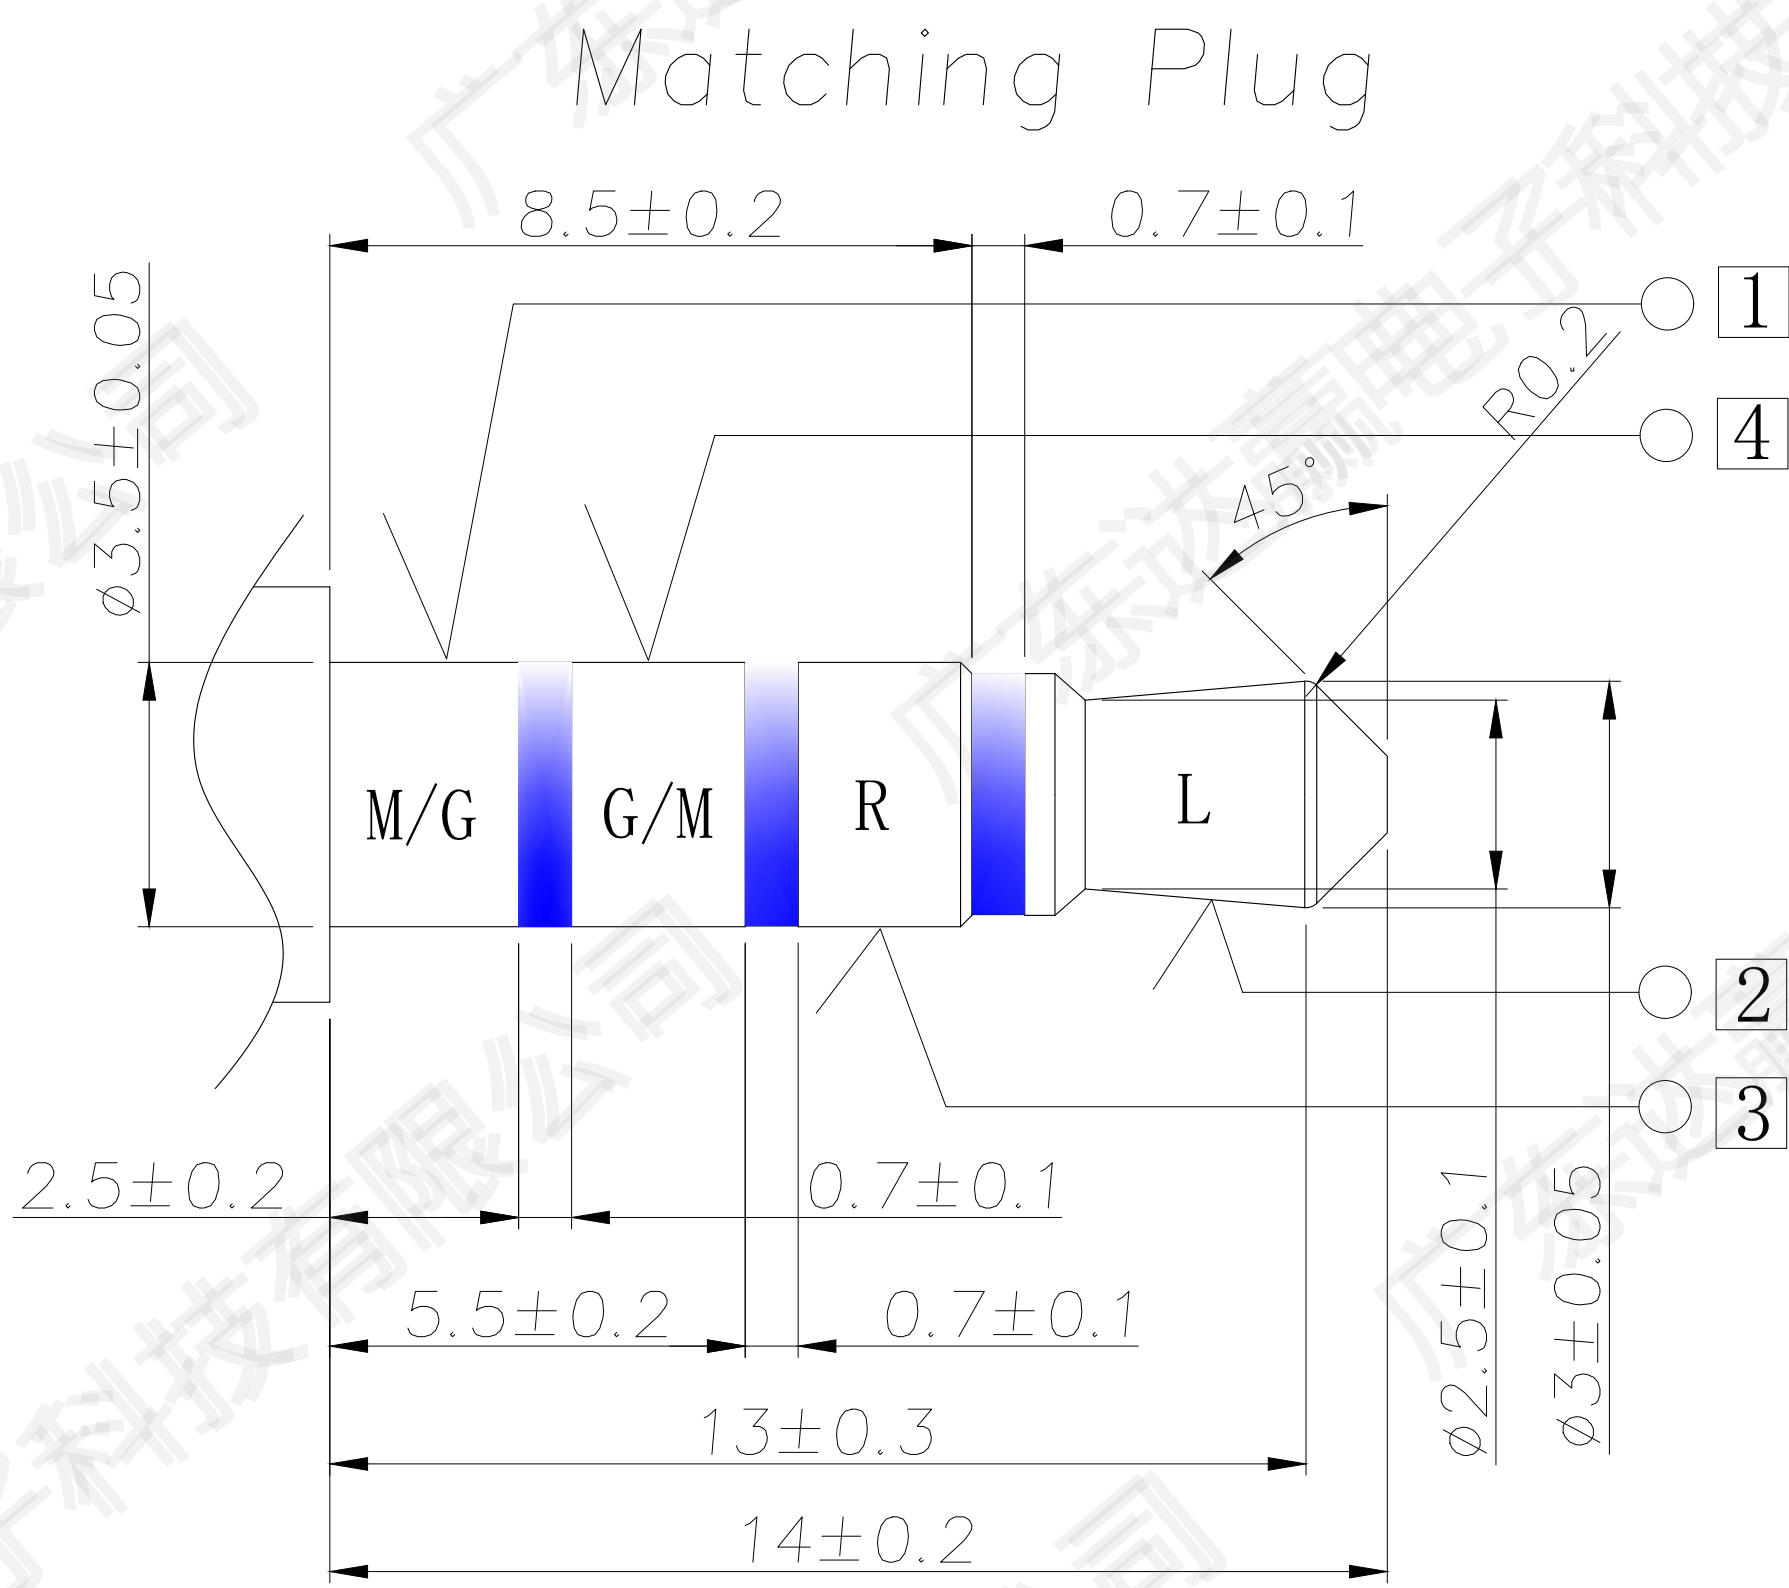
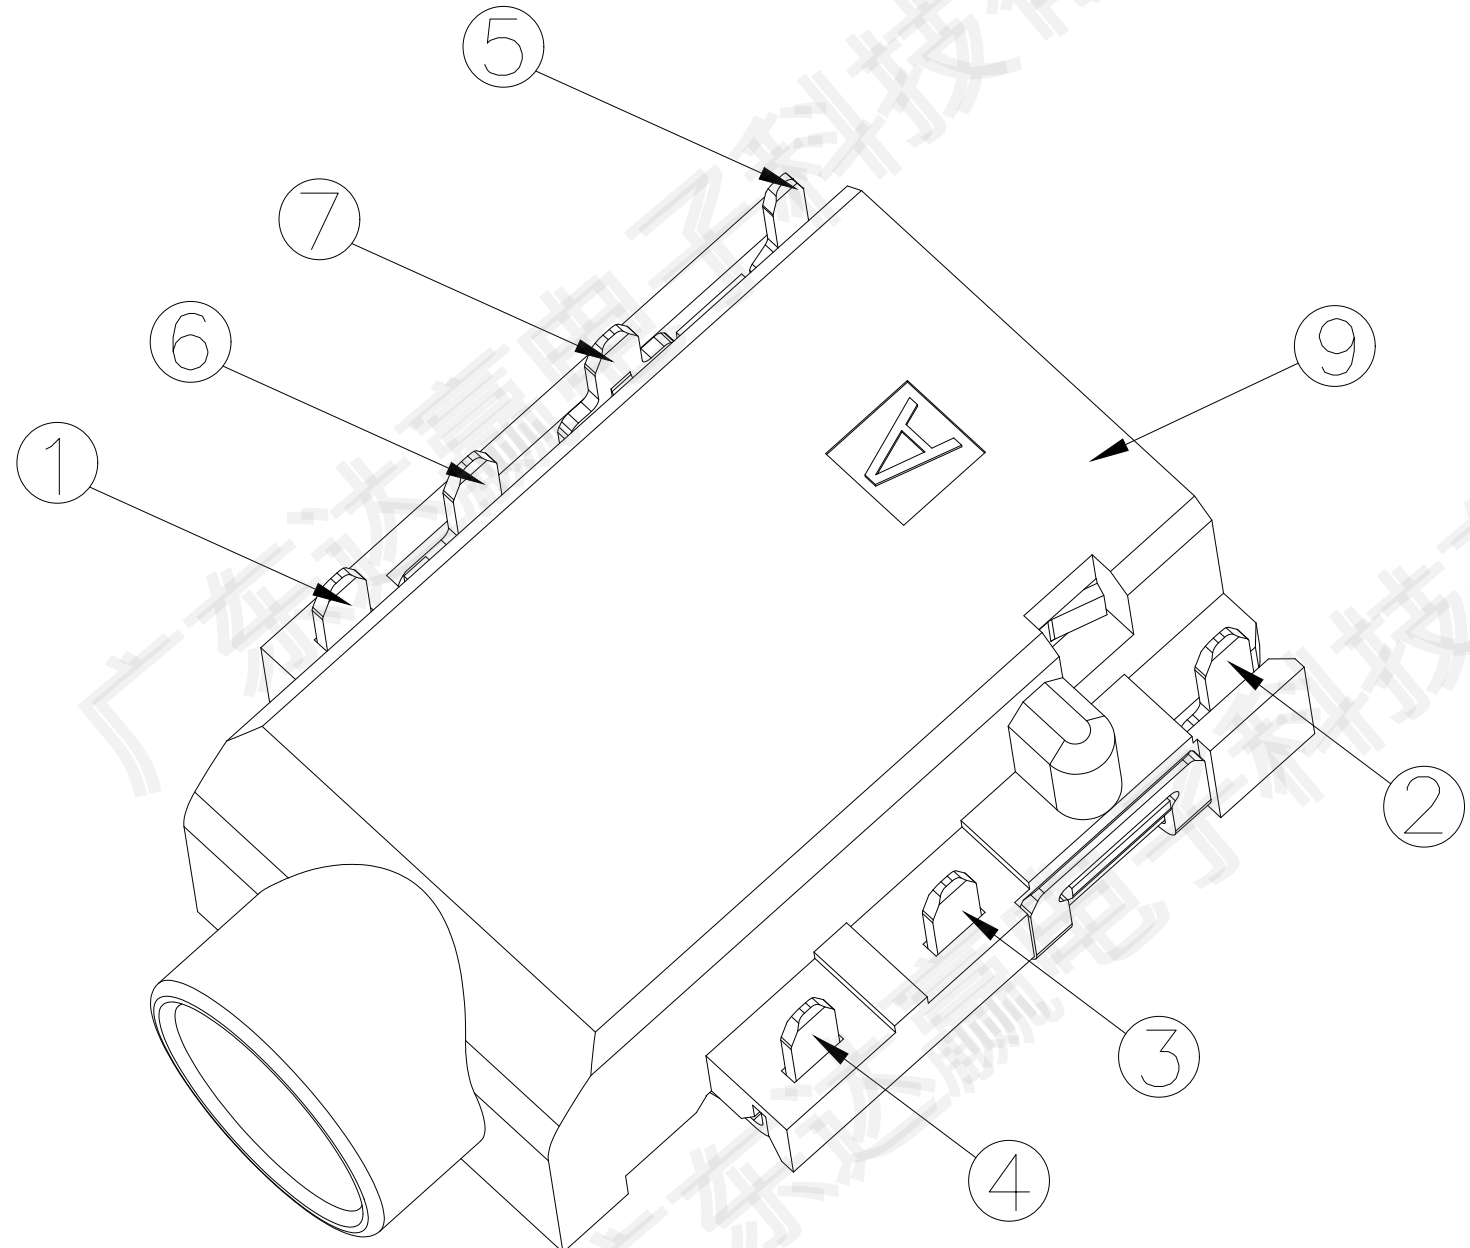




MODEL NO. :
PJ-D3261S-ABK7AS02L-RH
(1) (2)(3) (4)(5)(6)

- (1) Series no.
(2) Schematic type: A
(3) Housing color:
BK7=Black
(4) Terminal plating:
AS02=Plating Tin/Gold flash.
(5) Packing mode:L=Reel packing
(6) Environmental requirements:
RH=RoHS 2.0 + Halogen Free

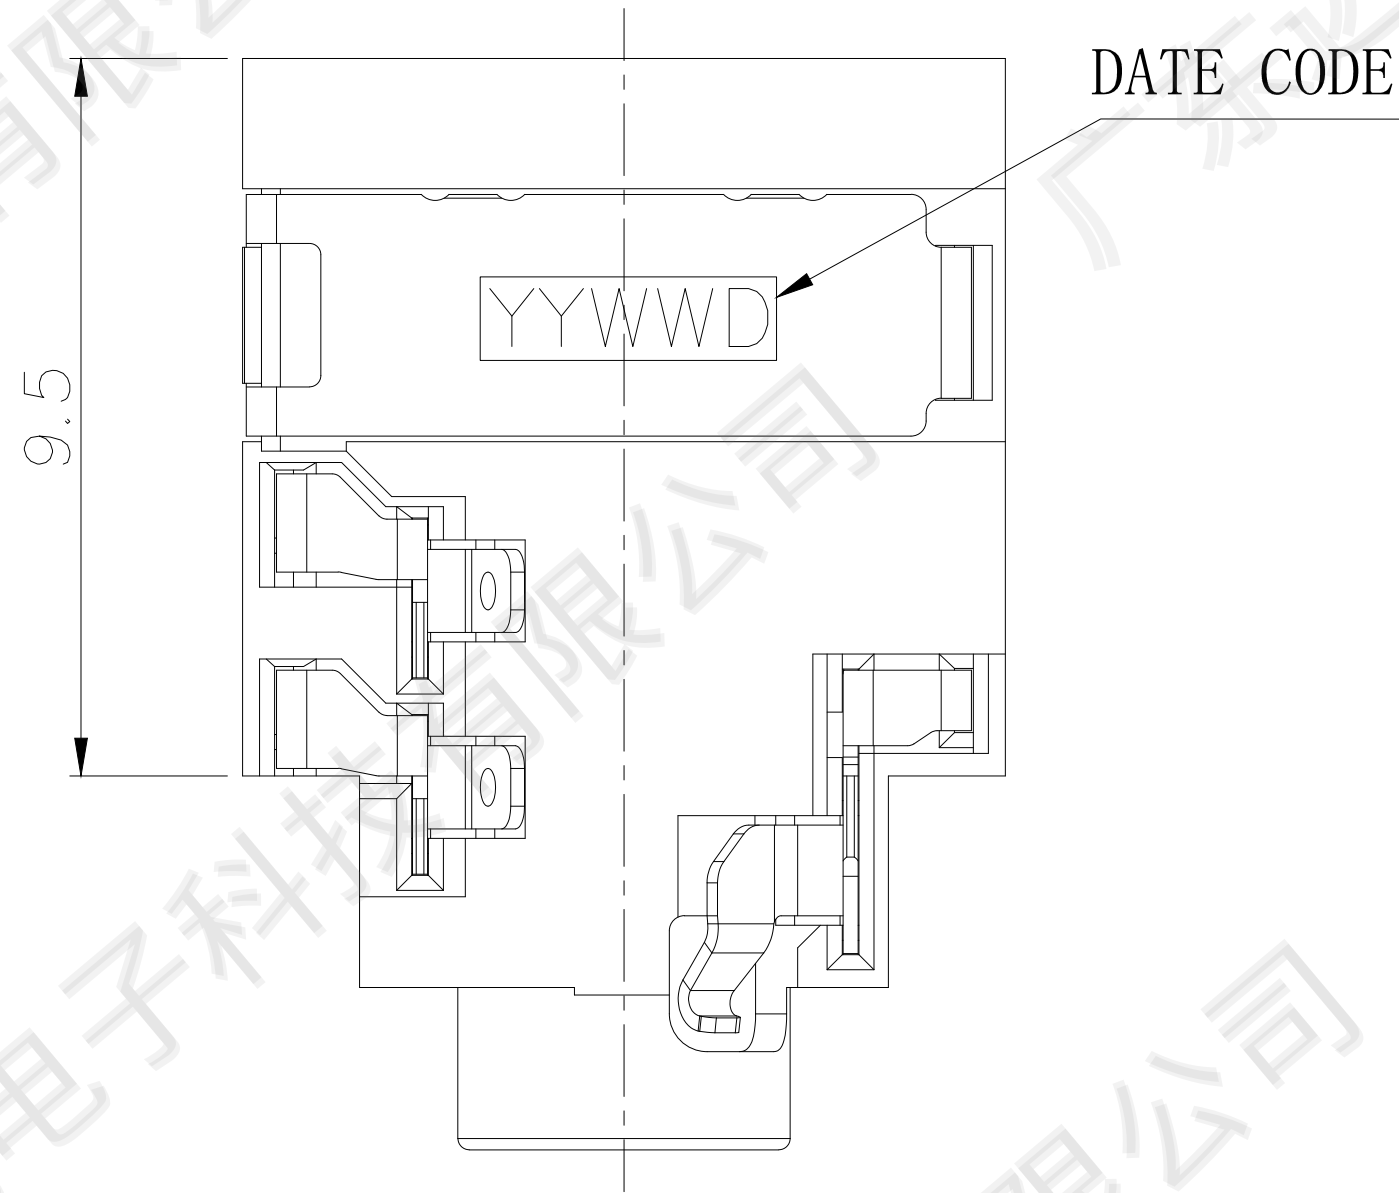

SPECIFICATION:

1. Electrical characteristics
1-1. Current rating: 1Amps.
1-2. Voltage rating: 12V DC.
1-3. Contact resistance: Between Jack-Plug: 50mΩ max;
Within Jack Break Spring, Make Spring: 30mΩ max.
1-4. Insulation resistance: 100MΩ min. at 500V DC.
1-5. Withstanding voltage: Mated Set or Plug: 250V AC
Or Jack: 500V AC.
2. Mechanical characteristics
2-1. Life test: 5000 cycles min,
2-2. Mating force: 8~30N.
Unmating force: 5~25N.
3. Operating Temperatures: -25℃ ~ +70℃, 85%RH Max.

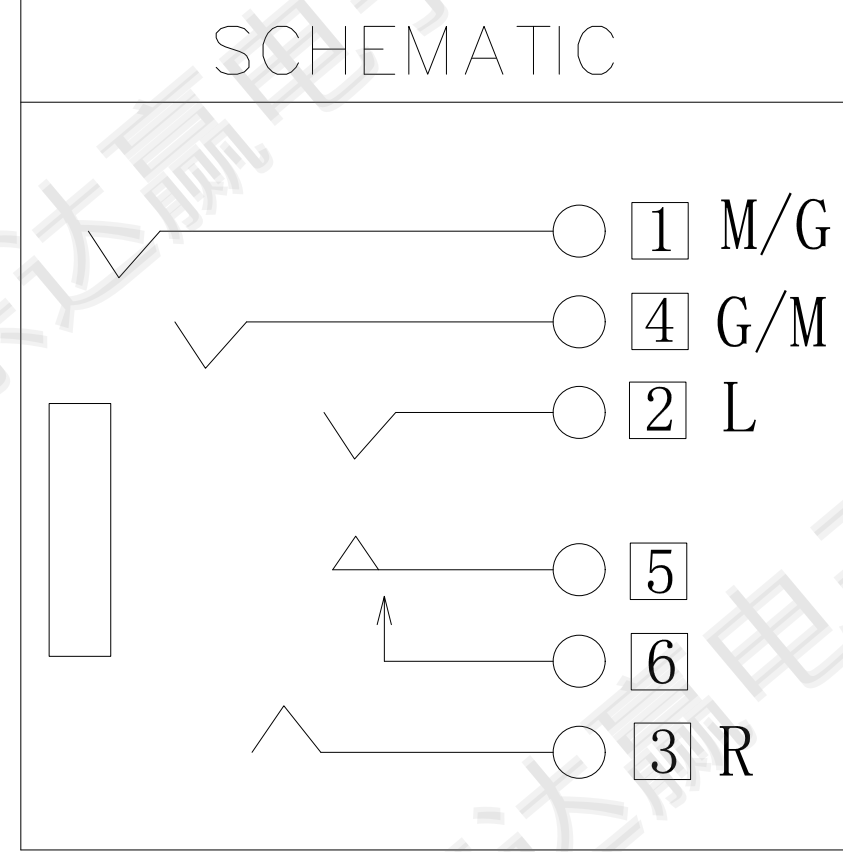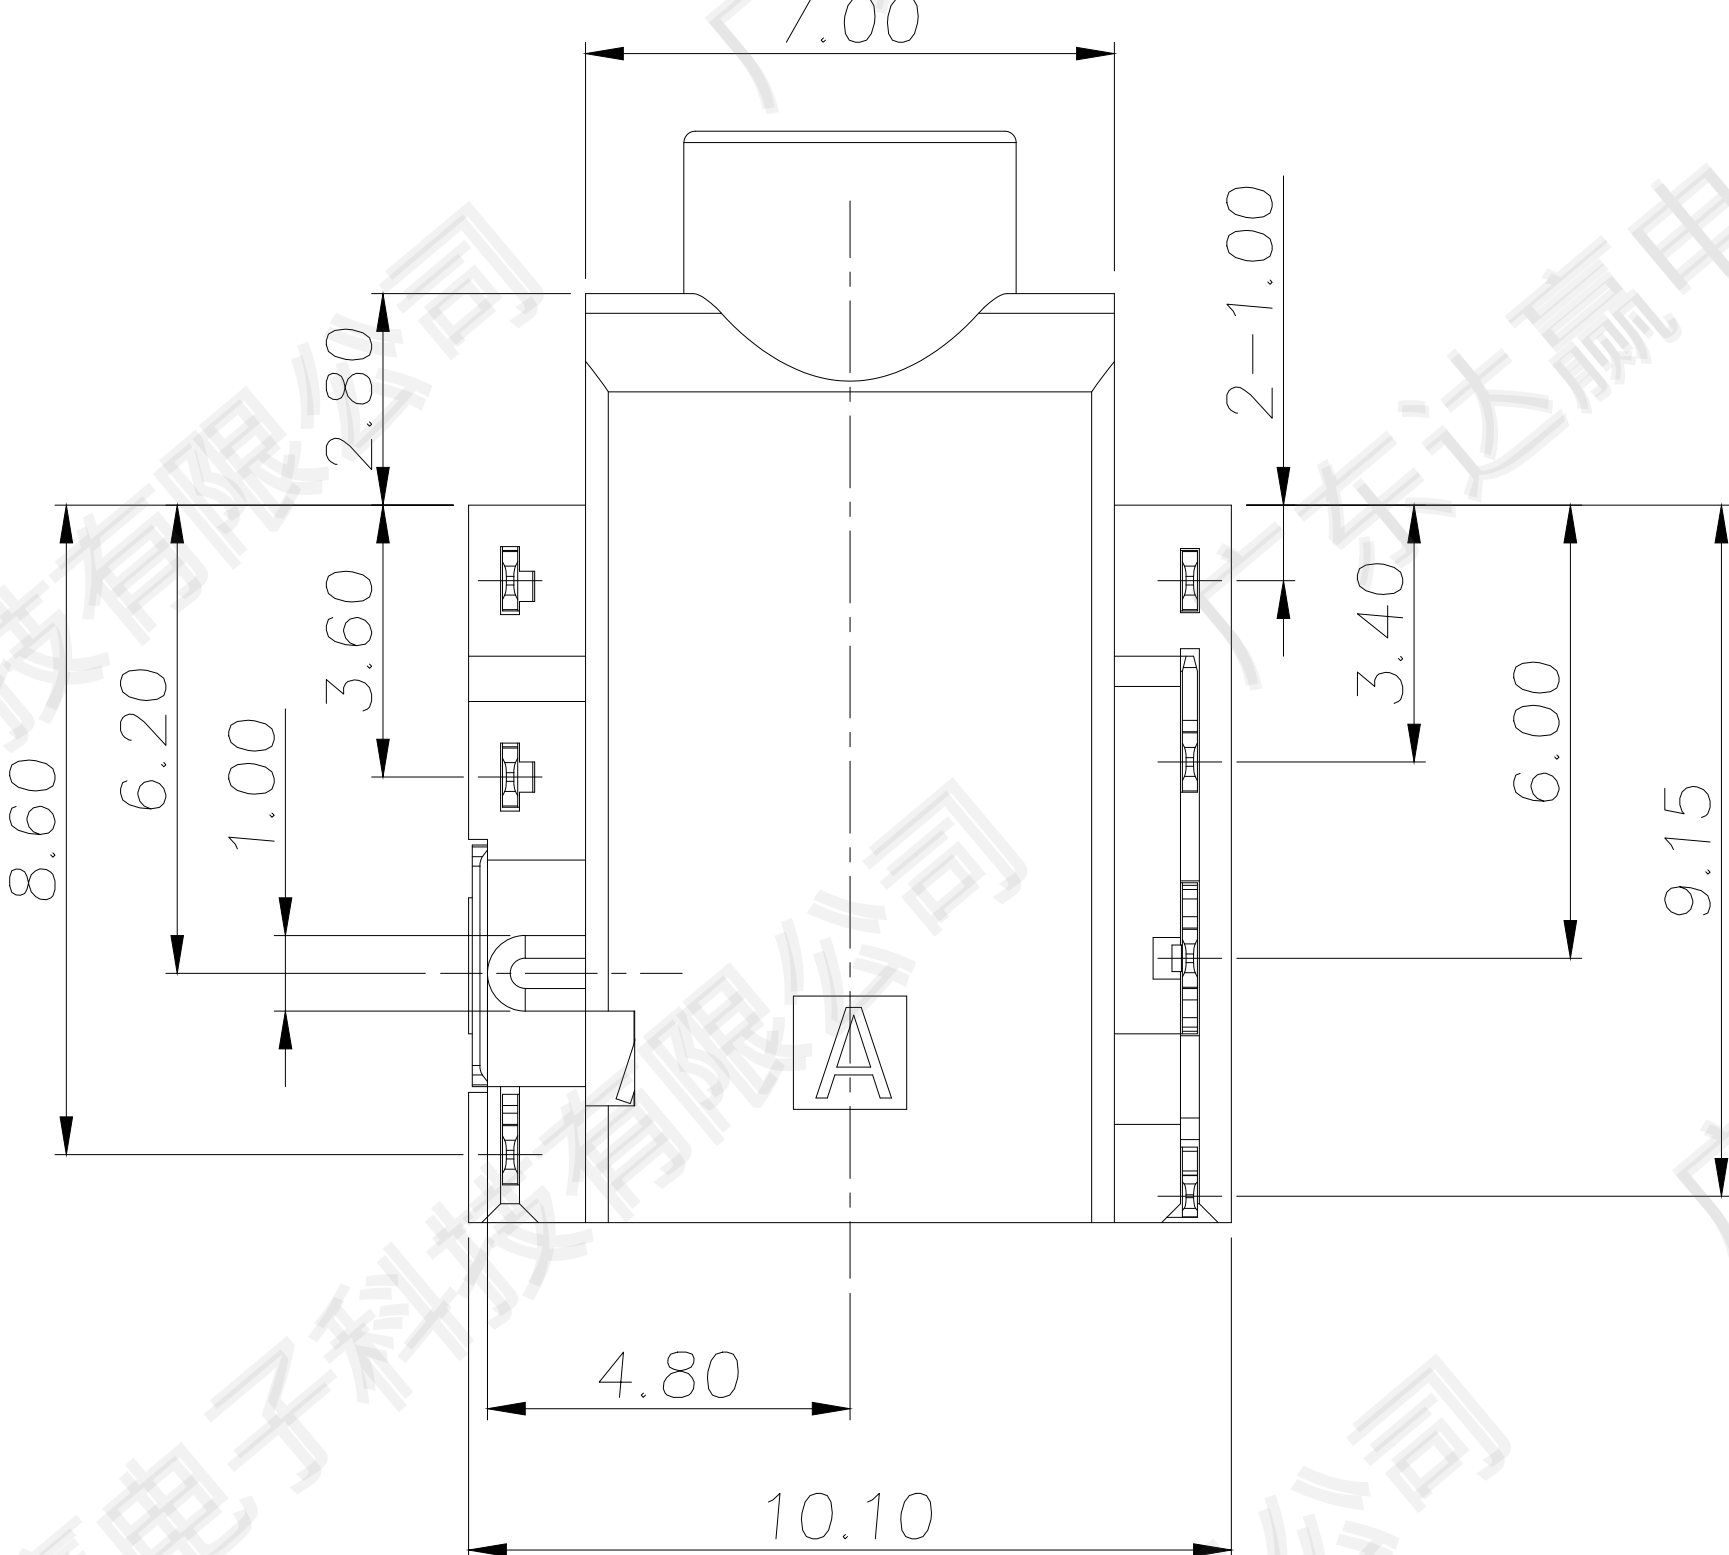

RECOMMENDED P. C. B LAYOUT
TOP VIEW (TOLRANCE: ±0.05)

9	Housing	1	PA10T R630NH UL94V-0	Black
8	Insulator	1	PA10T R630NH UL94V-0	Black
5	Transfer Spring [5]	1	C5210-EH, 0.20t	Gold Flash On Contact Area And Solder Tail Area, All over 50u" Nickel Plated
7	shell	1	C5210-EH, 0.20t	Plating Ni 60u"
6	Shunt terminal [6]	1	C5210-EH, 0.20t	Gold Flash On Contact Area 80u"matte tin Plating on Solder Tail Area, All over 50u"Nickel Plated
4	Ring spring [4]	1	C5210-EH, 0.20t	
3	Ring spring [3]	1	C5210-EH, 0.20t	
2	Tip spring [2]	1	C5210-EH, 0.20t	
1	Earth spring [1]	1	C5210-EH, 0.20t	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

 广东达赢电子科技有限公司
Guangdong DaYing Electronic Technology Co.,ltd.

						Angle	±2°	DESIGN	罗振强	2020. 09. 18
						. x	±0. 30	CHECK		
	A-1	2020. 09. 18	依照客户要求更新SPEC	罗振强	刘 伟	. xx	±0. 25	APPROVAL		
	A-0	2020. 03. 04	NEW	罗振强	刘 伟	. xxx	±0. 15			
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: 1:1	UNIT:mm	A4

CUSTOMER DRAWING	TITLE:	ø3.5mm PHONE JACK
	MODEL NO.	PJ-D3261S-ABK7AS02L-RH
	FILE NO.	Q/DY. QW-001A-0706