

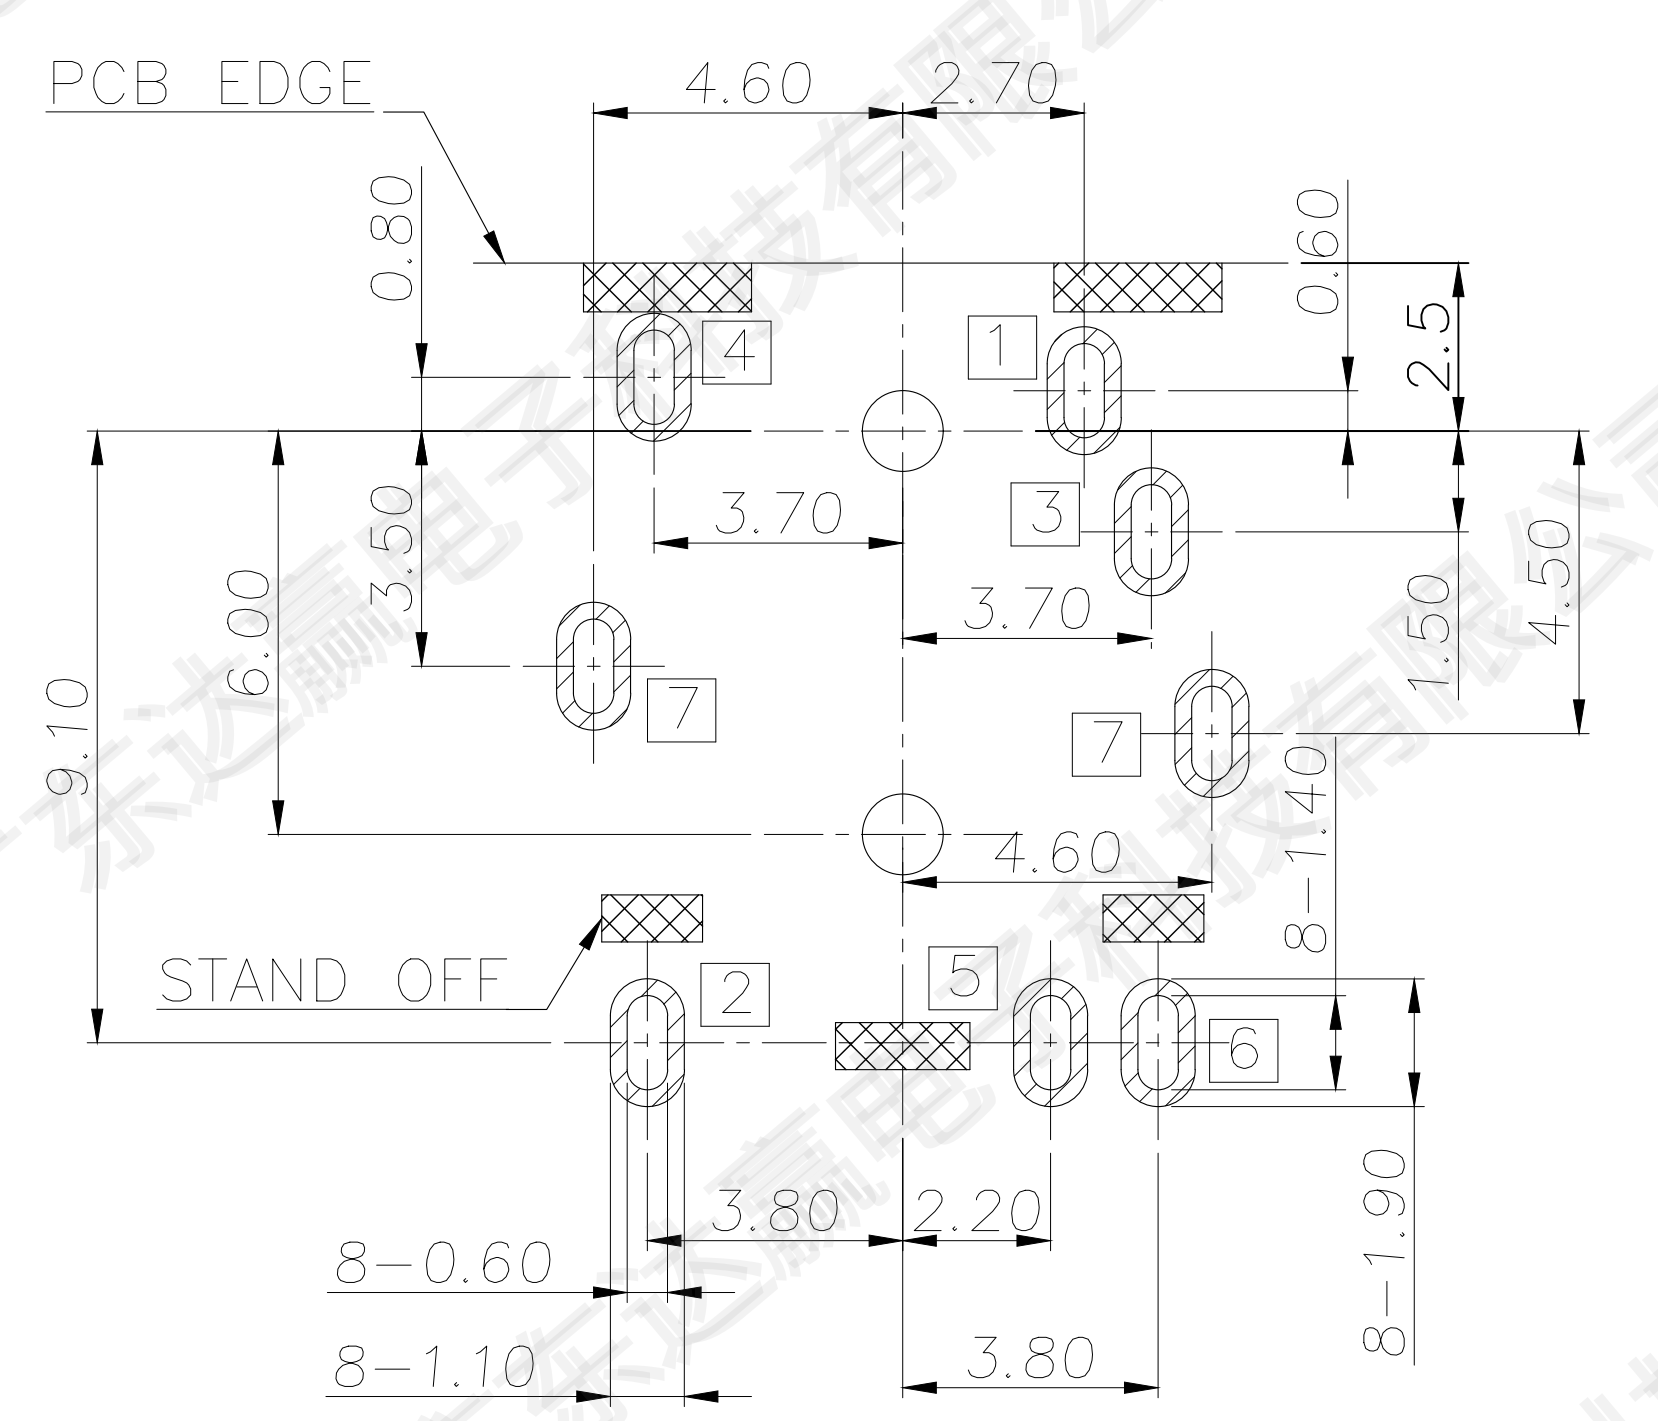
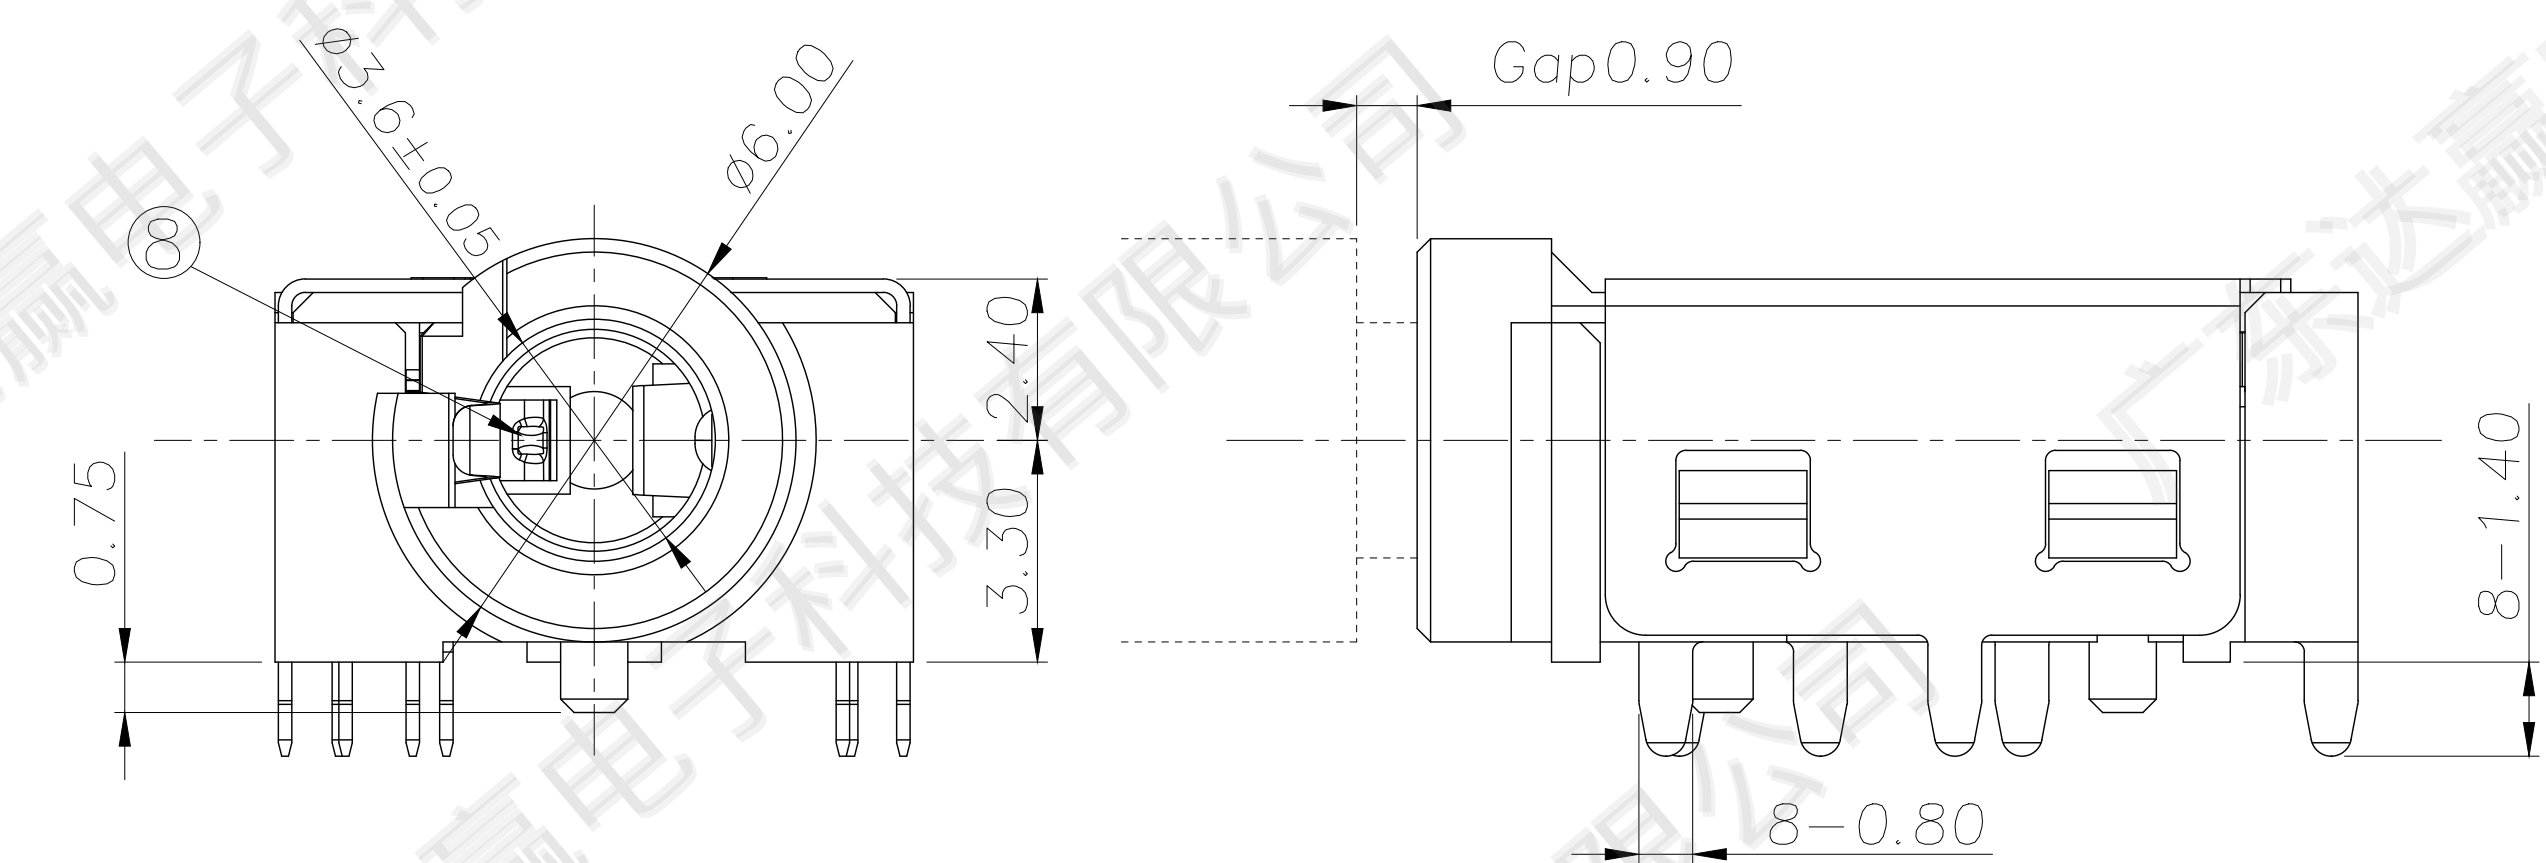
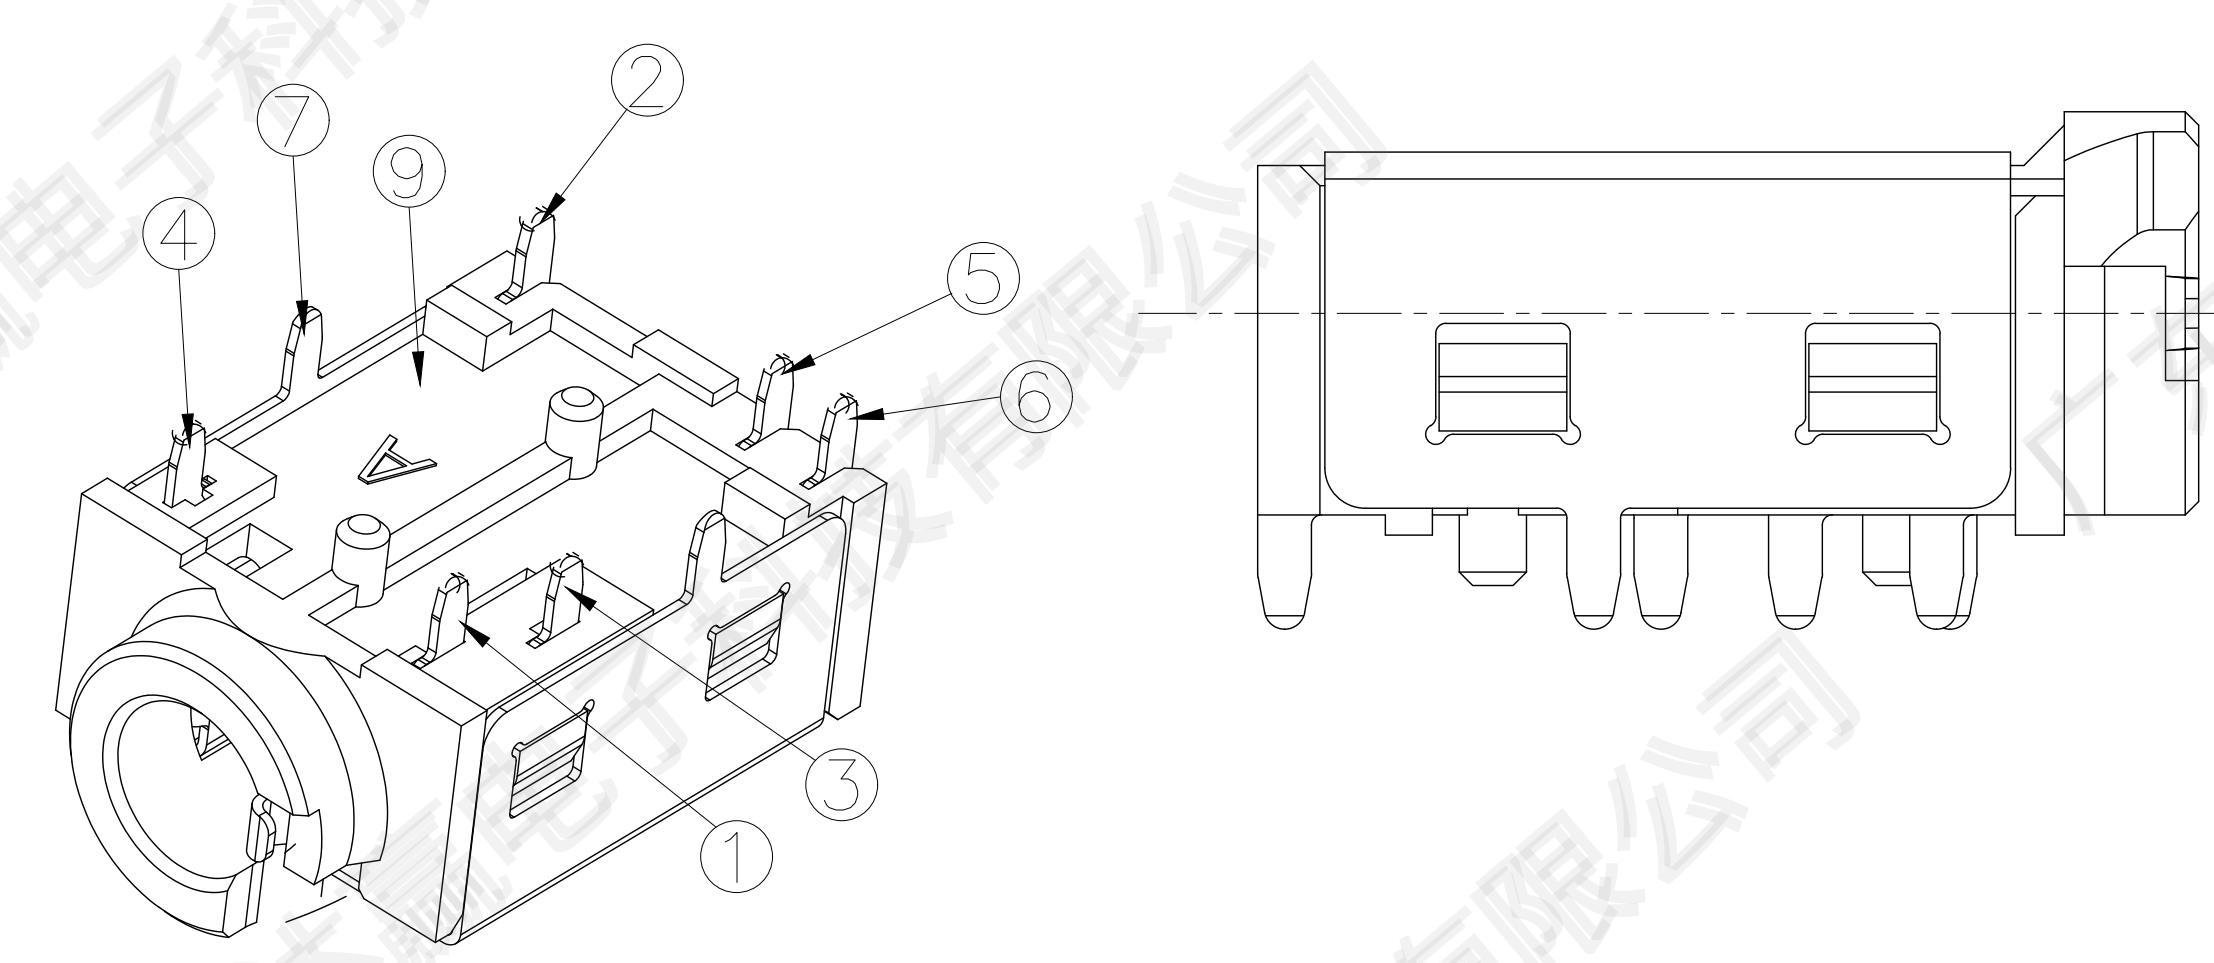
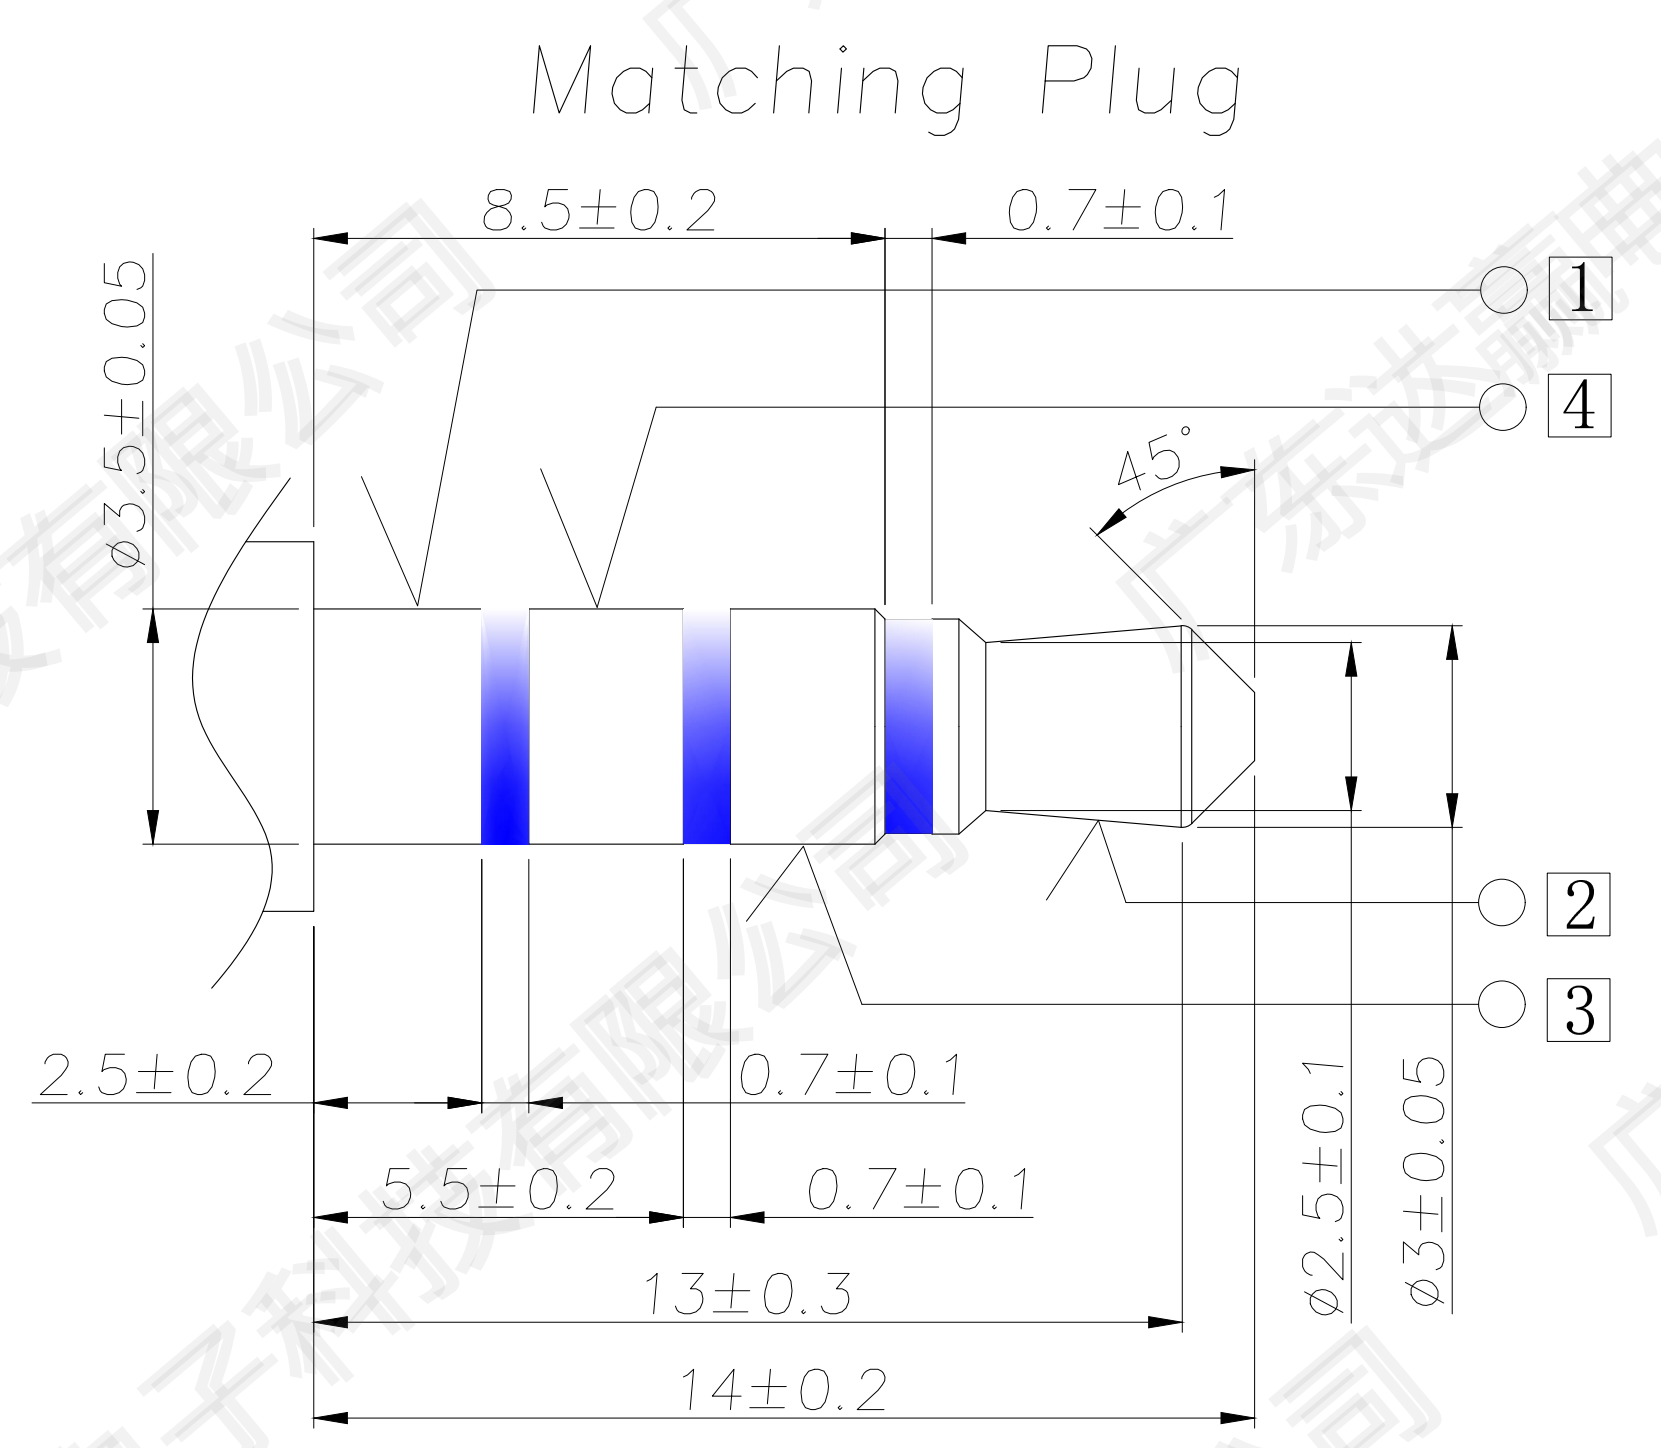
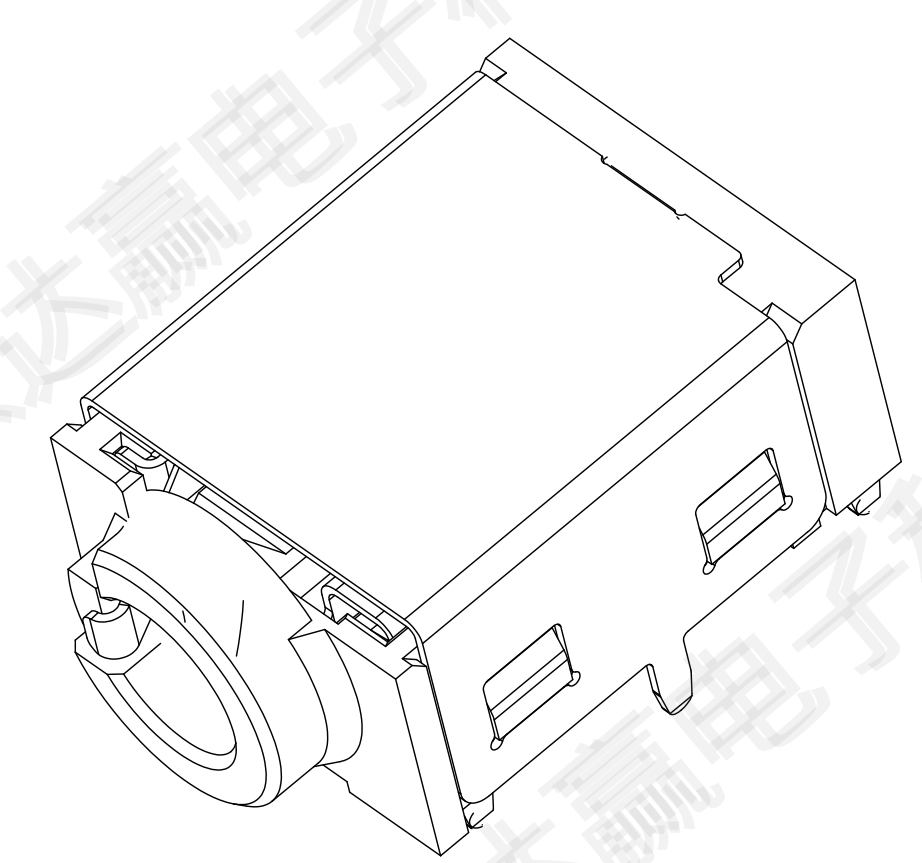
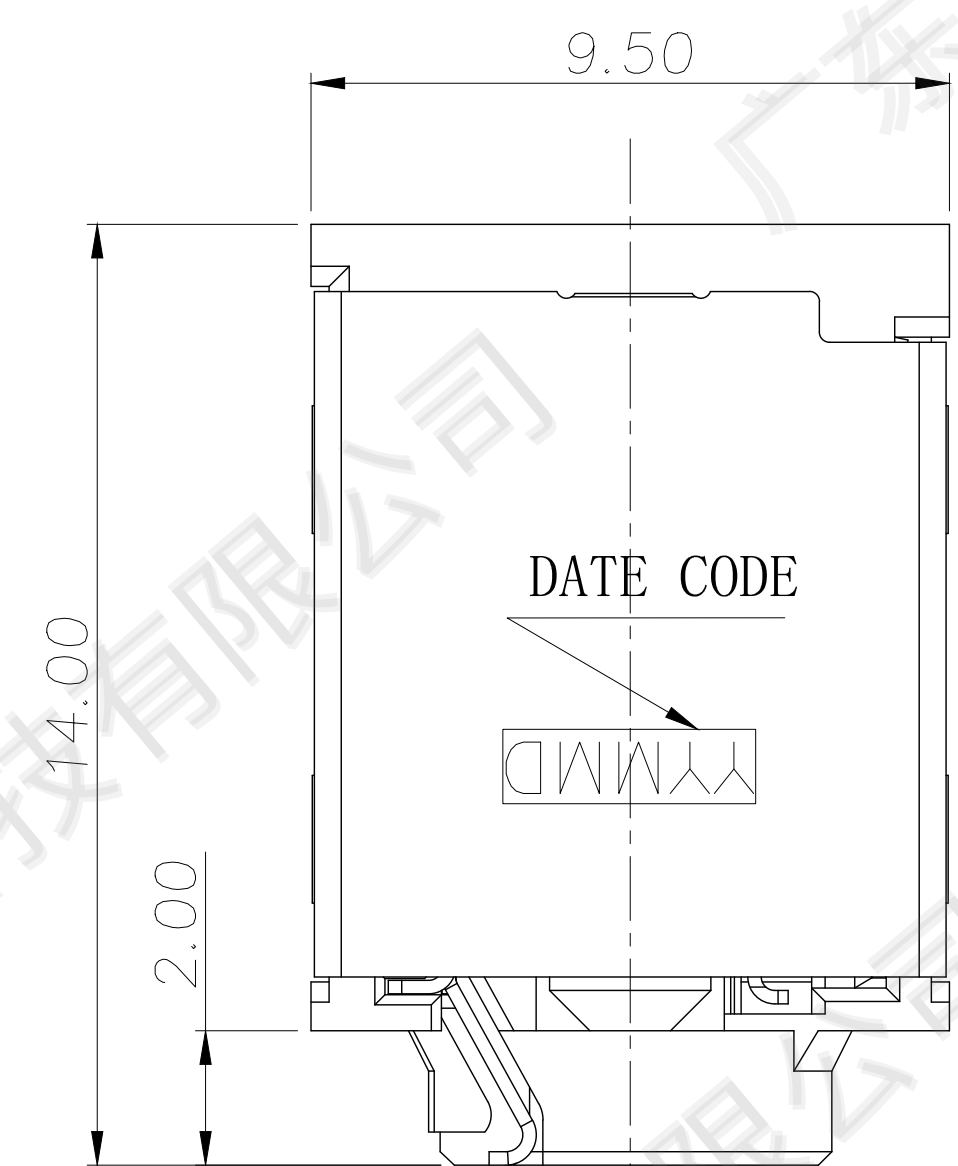


MODEL NO. :
PJ-D3237B-ABK7AS06L-RH
(1) (2) (3) (4) (5) (6)
(1) Series no.
(2) Schematic type: A
(3) Housing color:
BK7=Black
(4) Terminal plating:
AS06=Plating Tin/AU 30" min.
(5) Packing mode:L=Reel packing
(6) Environmental requirements:
RH=RoHS 2.0 + Halogen Free

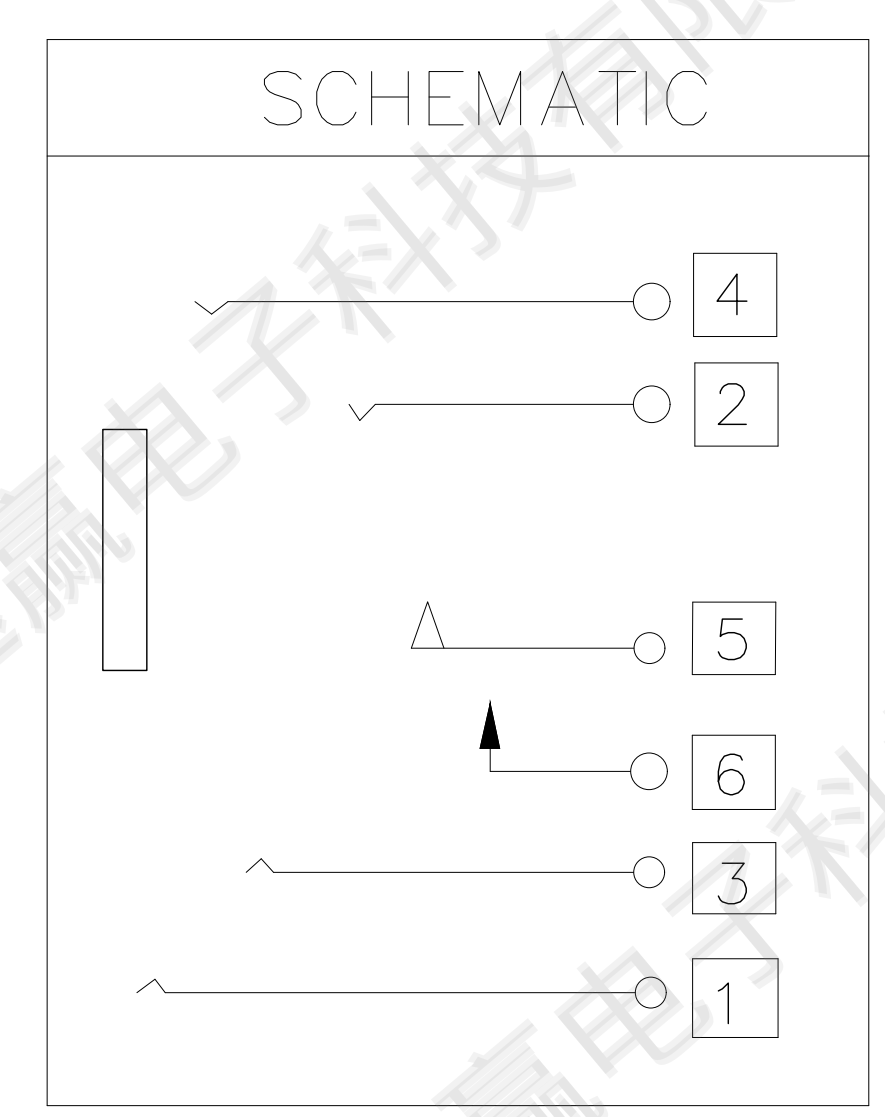

SPECIFICATION:
1.Electrical characteristics
1-1.Current rating:DC 0.5A max.
1-2:Voltage rating:DC 30V.
1-3:Contact resistance:50mΩ max.
1-4.Insulation resistance:100MΩ min. at 500V DC.
1-5.Withstanding voltage:500V AC for 1 minute.
2.Mechanical characteristics
2-1.Life test:5000 cycles min,
2-2.Mating force:3~30N,
Unmating force:3~30N.

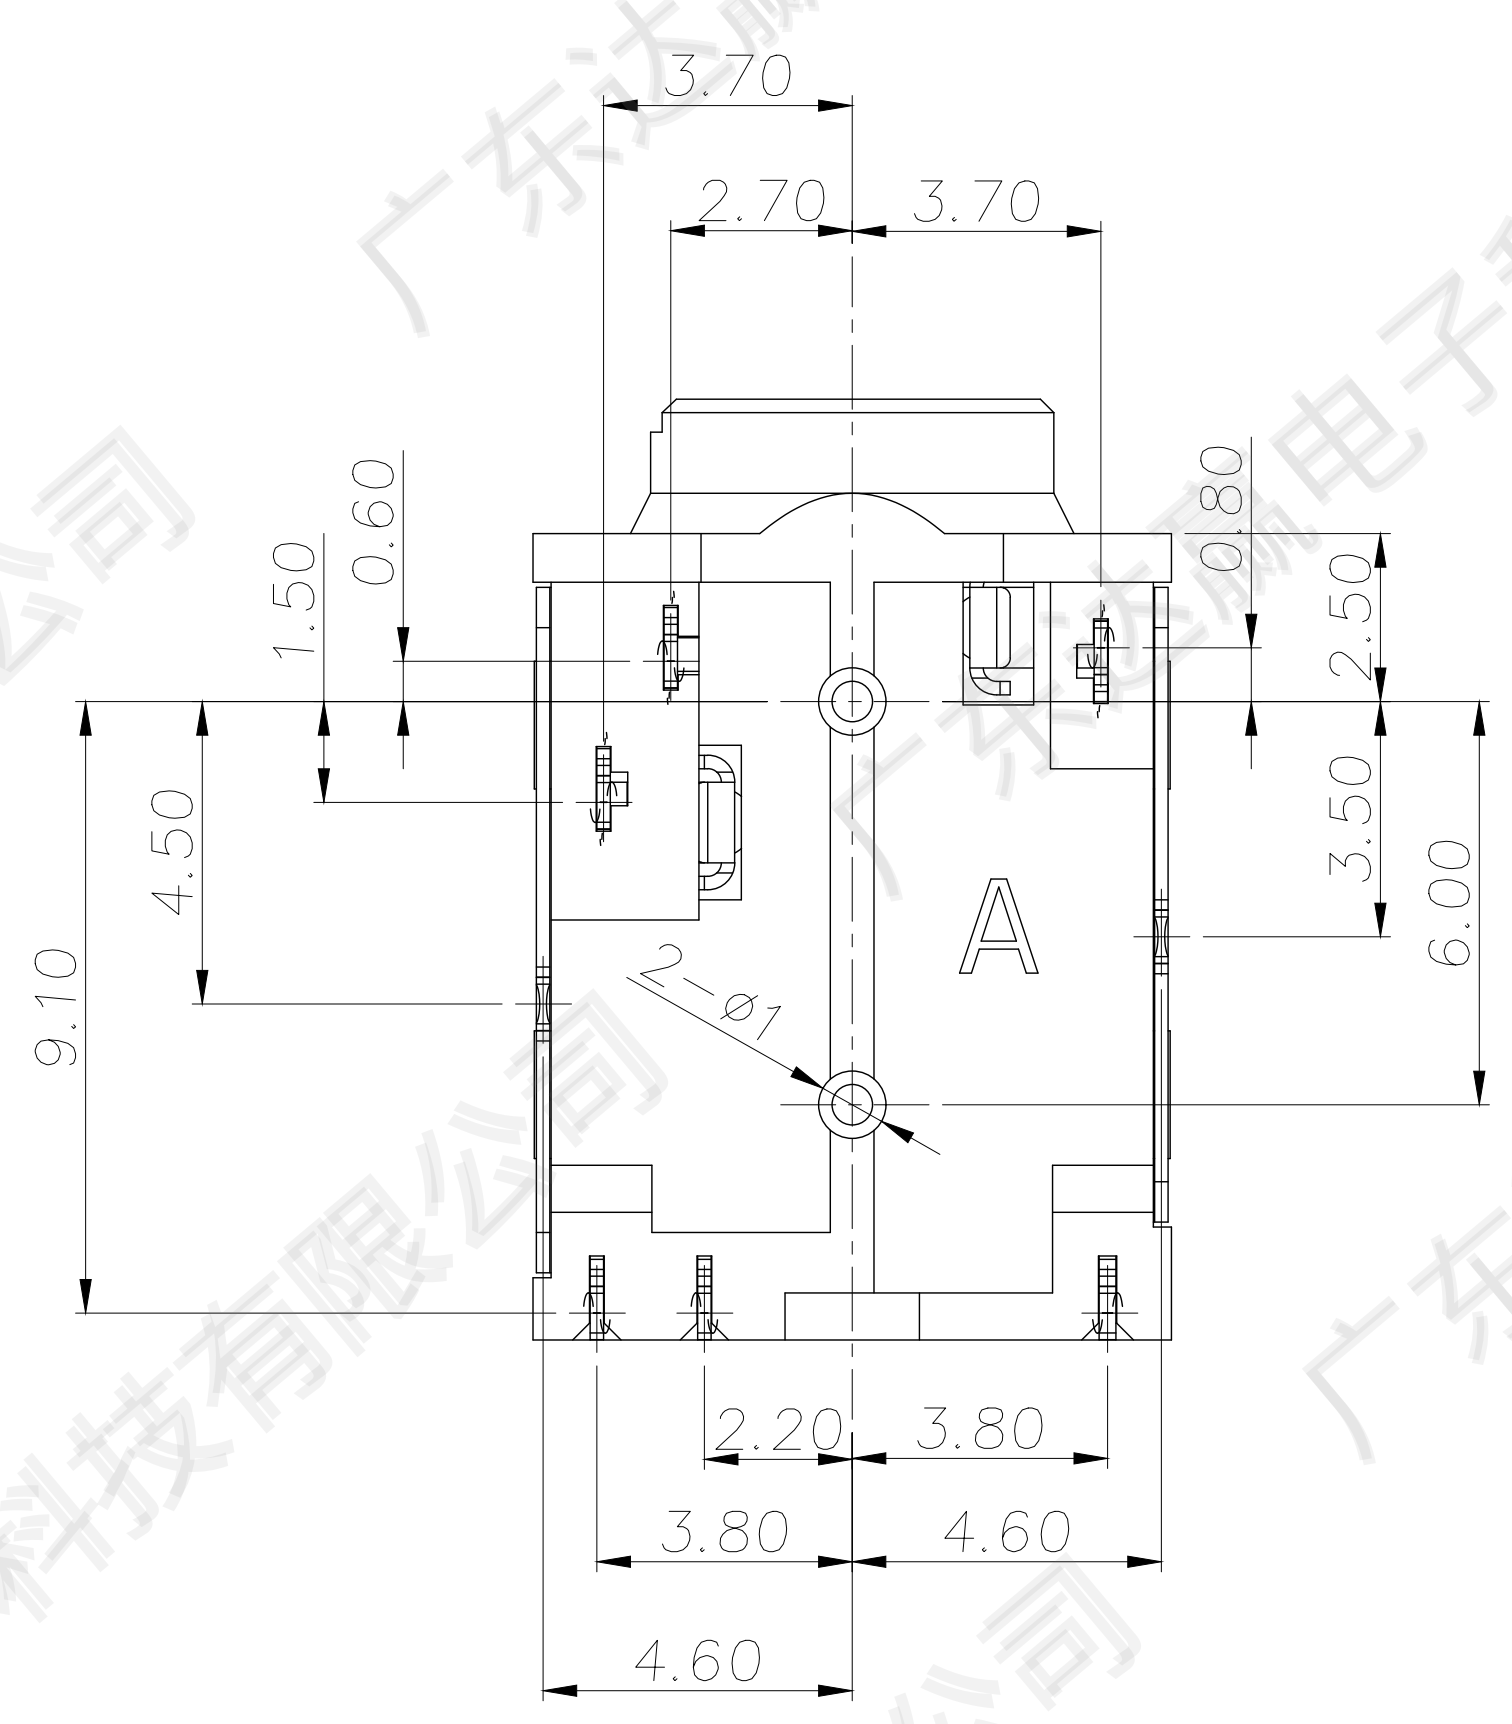

RECOMMENDED P. C. B LAYOUT (t=1.0mm)
TOP VIEW (TOLRANCE:±0.05)

9	Housing	1	HIGH TEMPERATURE PLASTIC	Black
8	Insulator	1	HIGH TEMPERATURE PLASTIC	Black
6	Shunt terminal 6	1	Phosphor bronze, 0.20t	Gold Flash On Contact And Solder Tail Area, 50u" Nickel UnderPlated
5	Transfer Spring 5	1	Phosphor bronze, 0.20t	
7	Shell	1	Phosphor bronze, 0.20t	Plating Ni .
4	Ring spring 4	1	Phosphor bronze, 0.20t	30u" Au On Contact Area
3	Ring spring 3	1	Phosphor bronze, 0.20t	100u" Matte-Tin Plating on Solder Tail Area, 50u" Nickel UnderPlated
2	Tip spring 2	1	Phosphor bronze, 0.25t	
1	Earth spring 1	1	Phosphor bronze, 0.20t	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

					Angle	±2°	DESIGN	李海鸥	2016. 11. 26	
					. x	±0. 30	CHECK			
	A-1	2016. 11. 26	外壳改镀可焊镍.	李海鸥	. xx	±0. 25	APPROVAL			
	A-0	2015. 07. 20	NEW	李海鸥	余 军	. xxx				
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	SCALE: 3:1	UNIT:mm	A4	SHEET:1 of 1

广东达赢电子科技有限公司
Guangdong DaYing Electronic Technology Co.,ltd.

TITLE: **φ3.5mm PHONE JACK**

MODEL NO. **PJ-D3237B-ABK7AS06L-RH**

FILE NO. **Q/SSY.QW-001A-0562**