

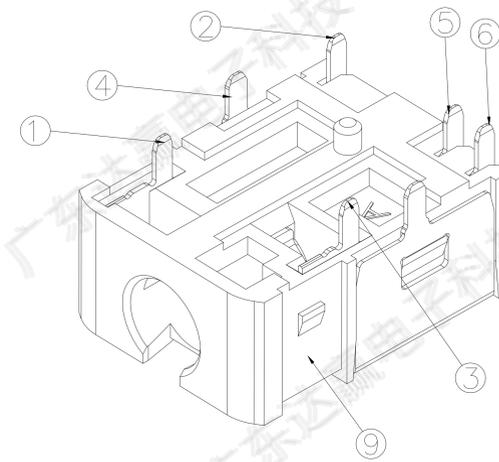
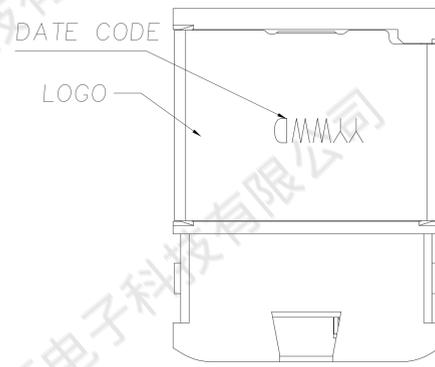
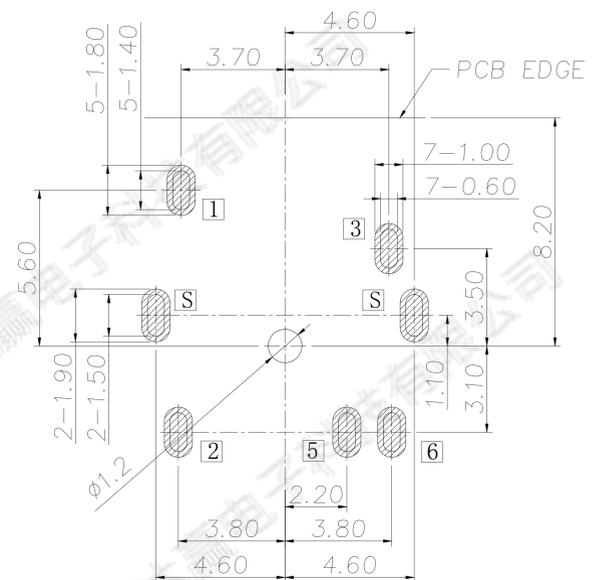
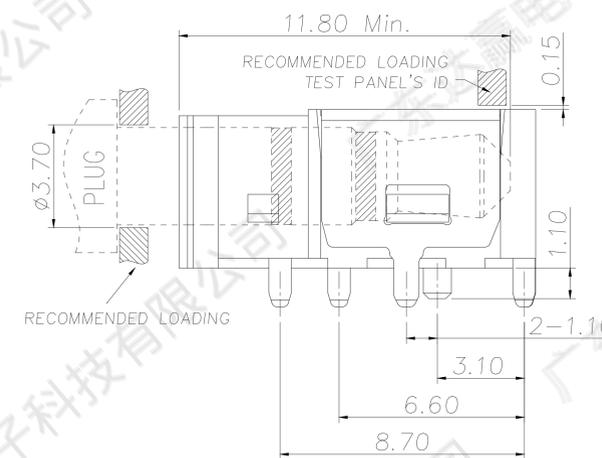
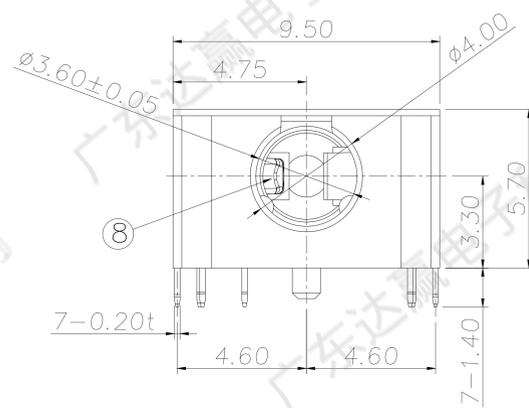


MODEL NO. :
 PJ-D33410-ABK7AS06L-RH
 (1) (2)(3) (4)(5)(6)




- (1) Series no.
- (2) Schematic type: A
- (3) Housing color:
BK7=Black.
- (4) Terminal plating:
AS06= Au 30u".
- (5) Packing mode:
L=Reel packing.
- (6) Environmental requirements:
RH=RoHS 2.0 + Halogen Free.
RS=RoHS 2.0.

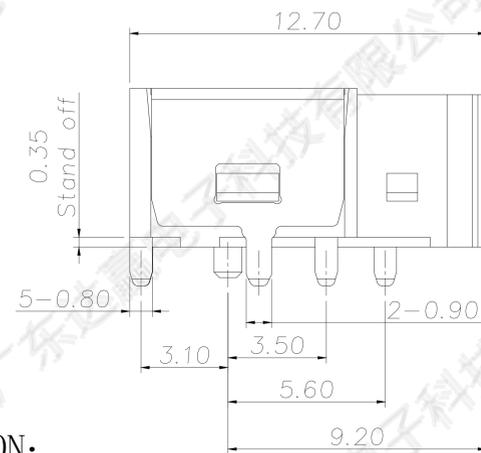

Matching Plug

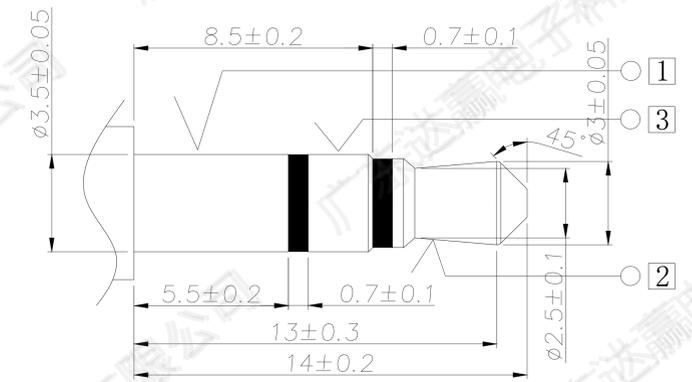

RECOMMENDED P. C. B LAYOUT (t=1.0mm)
 TOP VIEW (TOLRANCE: ±0.05)

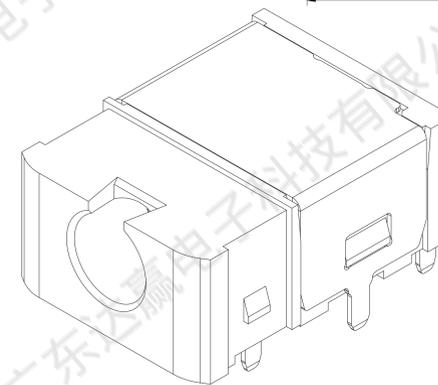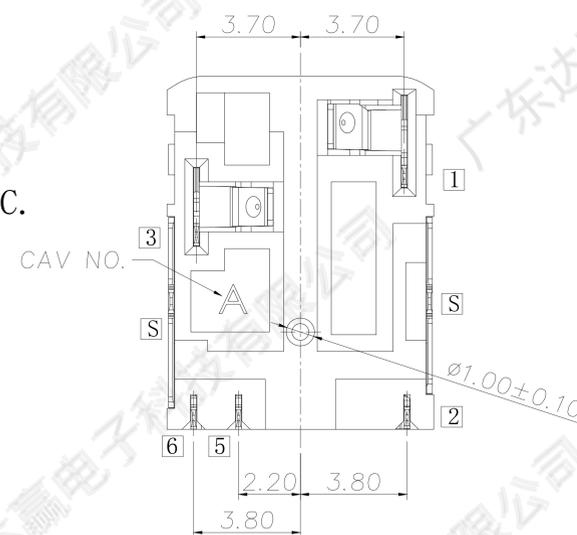

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
9	Housing	1	PA10T R630NH+30%GF UL 94V-0	Black
8	Insulator	1	PA10T R630NH+30%GF UL 94V-0	Black
6	Shunt terminal [6]	1	Phosphor bronze, 0.20t	5u" Ag On Contact And Solder Tail Area, 50u" Nickel UnderPlated
5	Transfer Spring [5]	1	Phosphor bronze, 0.20t	
4	Shell	1	Phosphor bronze, 0.20t	Plating Ni 80u"Min.
3	Ring spring [3]	1	Phosphor bronze, 0.20t	30u" Au On Contact Area
2	Tip spring [2]	1	Phosphor bronze, 0.20t	100u" Matte-Tin Plating on Solder Tail Area, 50u" Nickel UnderPlated
1	Earth spring [1]	1	Phosphor bronze, 0.20t	

SPECIFICATION:

1. Electrical characteristics
 - 1-1. Current rating: DC 1A max.
 - 1-2. Voltage rating: DC 12V.
 - 1-3. Contact resistance: 50mΩ max.
 - 1-4. Insulation resistance: 100MΩ min. at 500V DC.
 - 1-5. Withstanding voltage: 500V AC for 1 minute.
2. Mechanical characteristics
 - 2-1. Life test: 5000 cycles min,
 - 2-2. Mating force: 3~30N,
Unmating force: 3~30N.
3. Salt spray test time: 48 hours min.
4. Sign^(x) shows QIP measurement items.

Marked "x" Dimension Should Be Measured By CPK

Angle	±2°	DESIGN	李江林	2018.03.07
.x	±0.25	CHECK		
.xx	±0.15	APPROVAL		
.xxx	±0.05	SCALE: 1:1	UNIT:mm	A4



广东达赢电子科技有限公司
 Guangdong DaYing Electronic Technology Co., Ltd.

CUSTOMER DRAWING	TITLE:	Ø3.5mm PHONE JACK
	MODEL NO.	PJ-D33410-ABK7AS06L-RH
	FILE NO.	Q/DY.QW-001A-0572

ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED
	A-0	2018.03.07	NEW	李江林	李海鸥	