


PART NO. :
PJ-D3261G - A BK9 AUXX L - RH
(1) (2) (3) (4) (5) (6)








- (1) Series no.
(2) Schematic type: A, B, C
(3) Housing color:
BK9=Black
(4) Terminal plating:
AU01=Gold Flash
AU04=Gold 5u" min.
AU08=Gold 10u" min.
AU05=Gold 15u" min.
(5) Packing mode:L=Reel packing
(6) Environmental requirements:
RH=RoHS 2.0 + Halogen Free

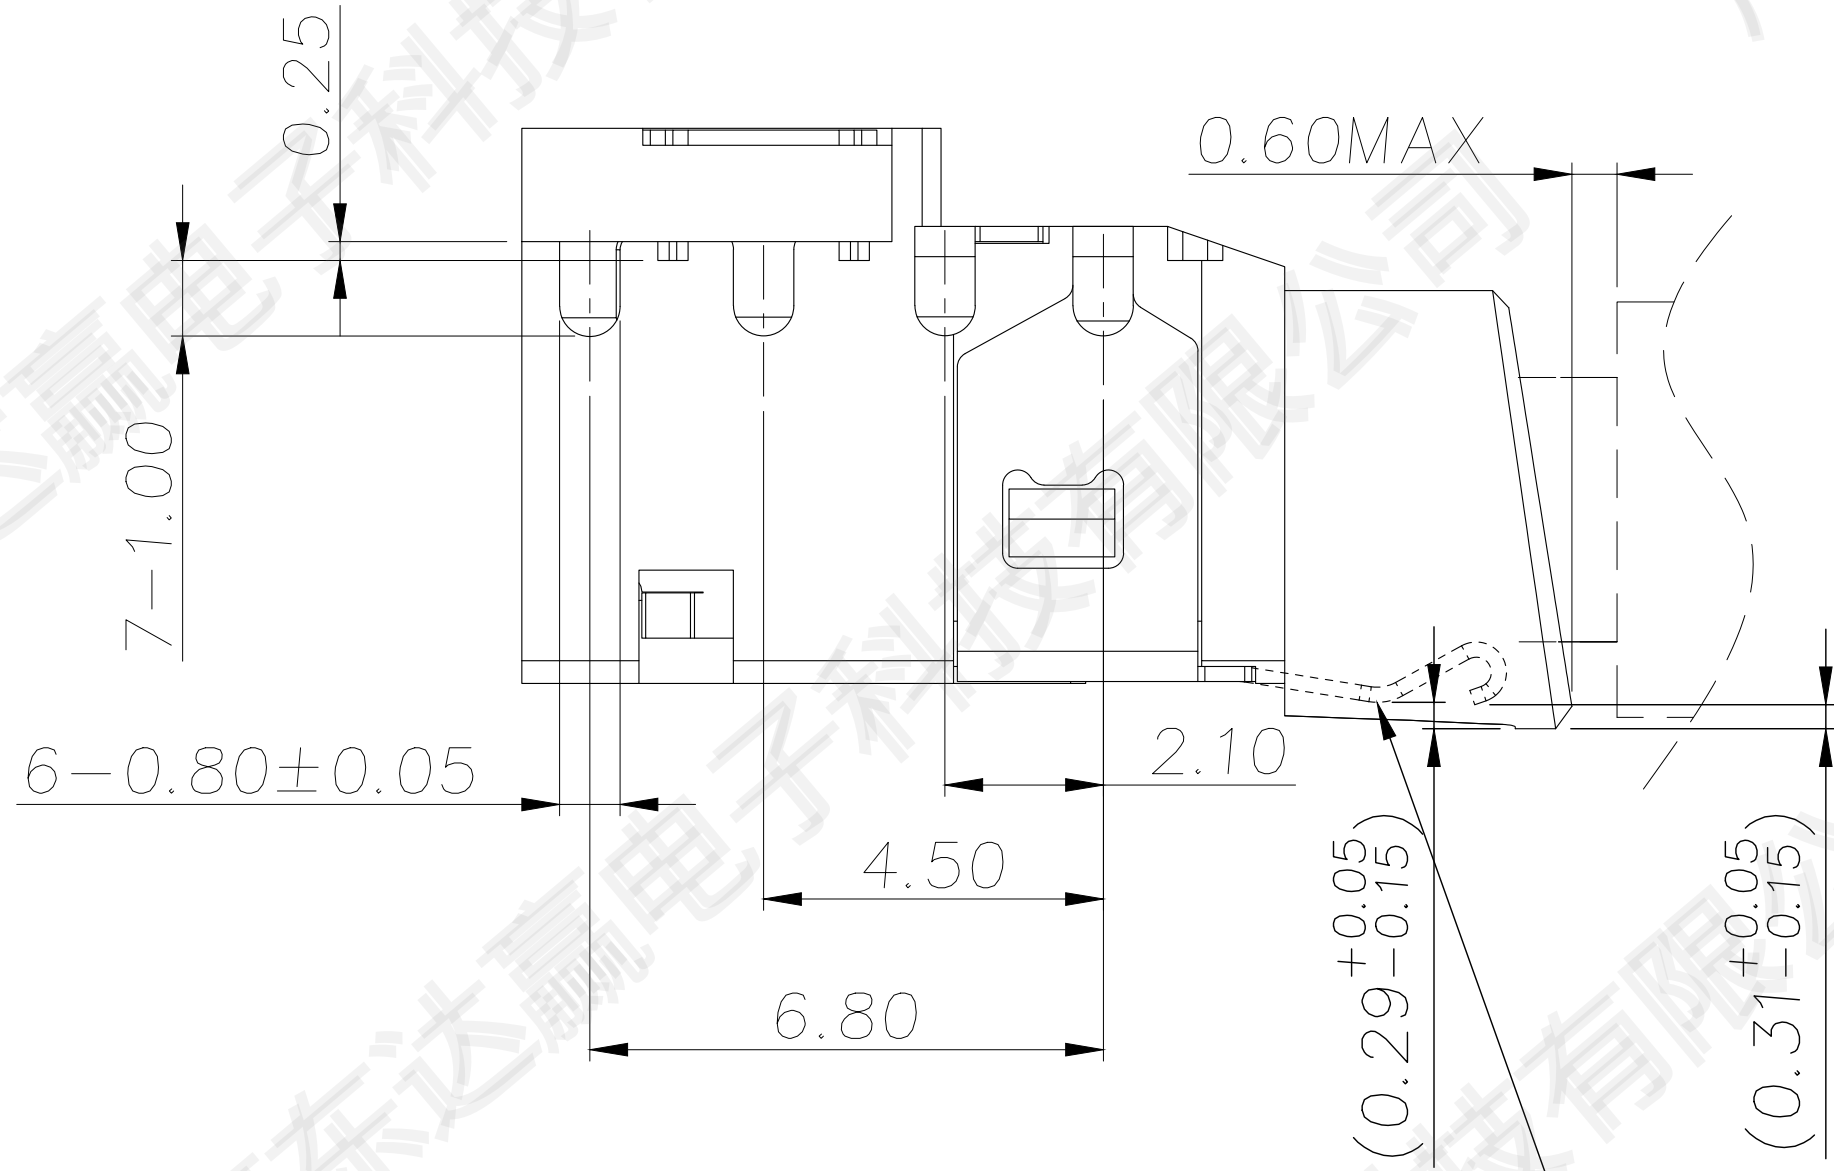

SPECIFICATION:

1. Electrical characteristics
1-1. Current rating:DC 0.5A max.
1-2: Voltage rating:DC 30V.
1-3: Contact resistance:50mΩ max.
After test:100mΩ max.
1-4. Insulation resistance:100MΩ min. at 500V DC.
1-5. Withstanding voltage:500V AC for 1 minute.
2. Mechanical characteristics
2-1. Life test:5000 cycles min,
2-2. Mating force:30N MAX.
Unmating force:4N MIN.
3. Salt spray test time:24 hours min.

确保插入PLUG后,
此端子不会超出塑胶面

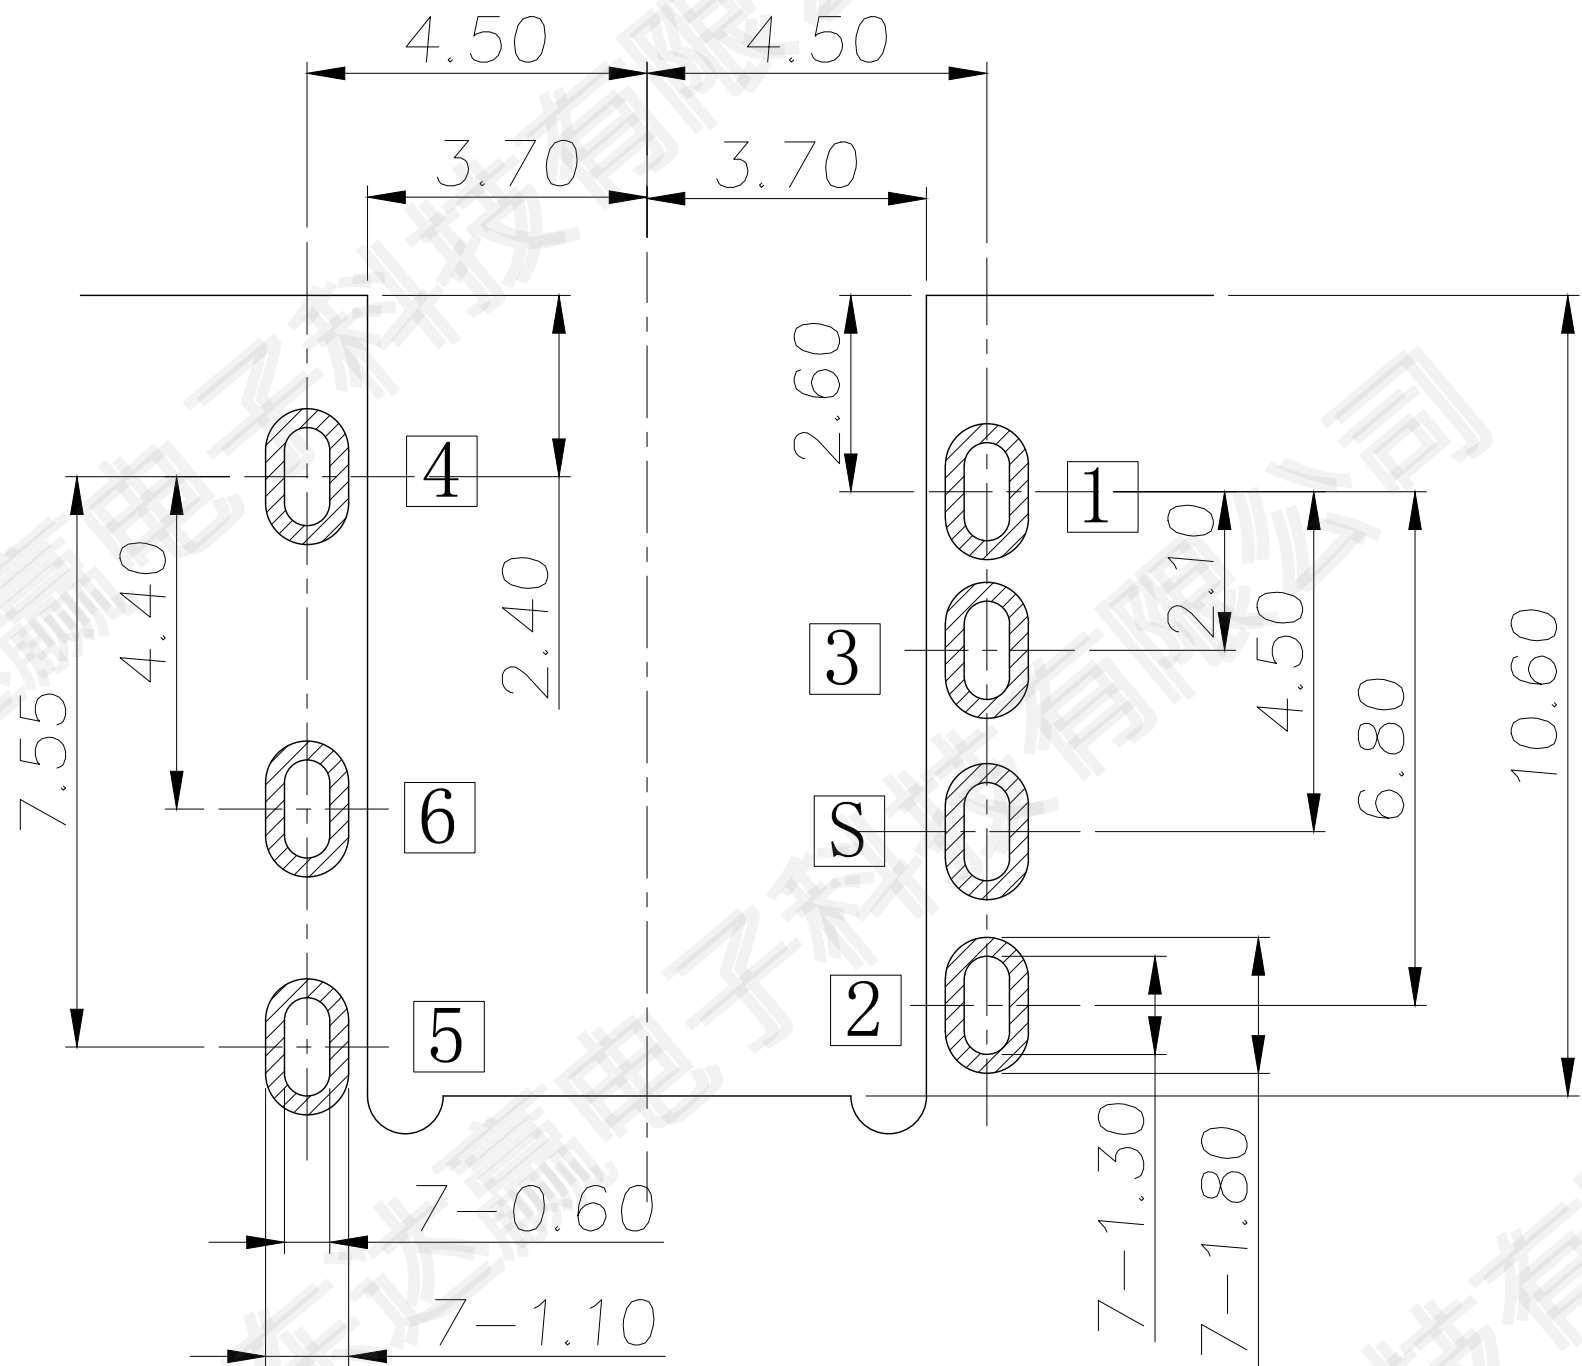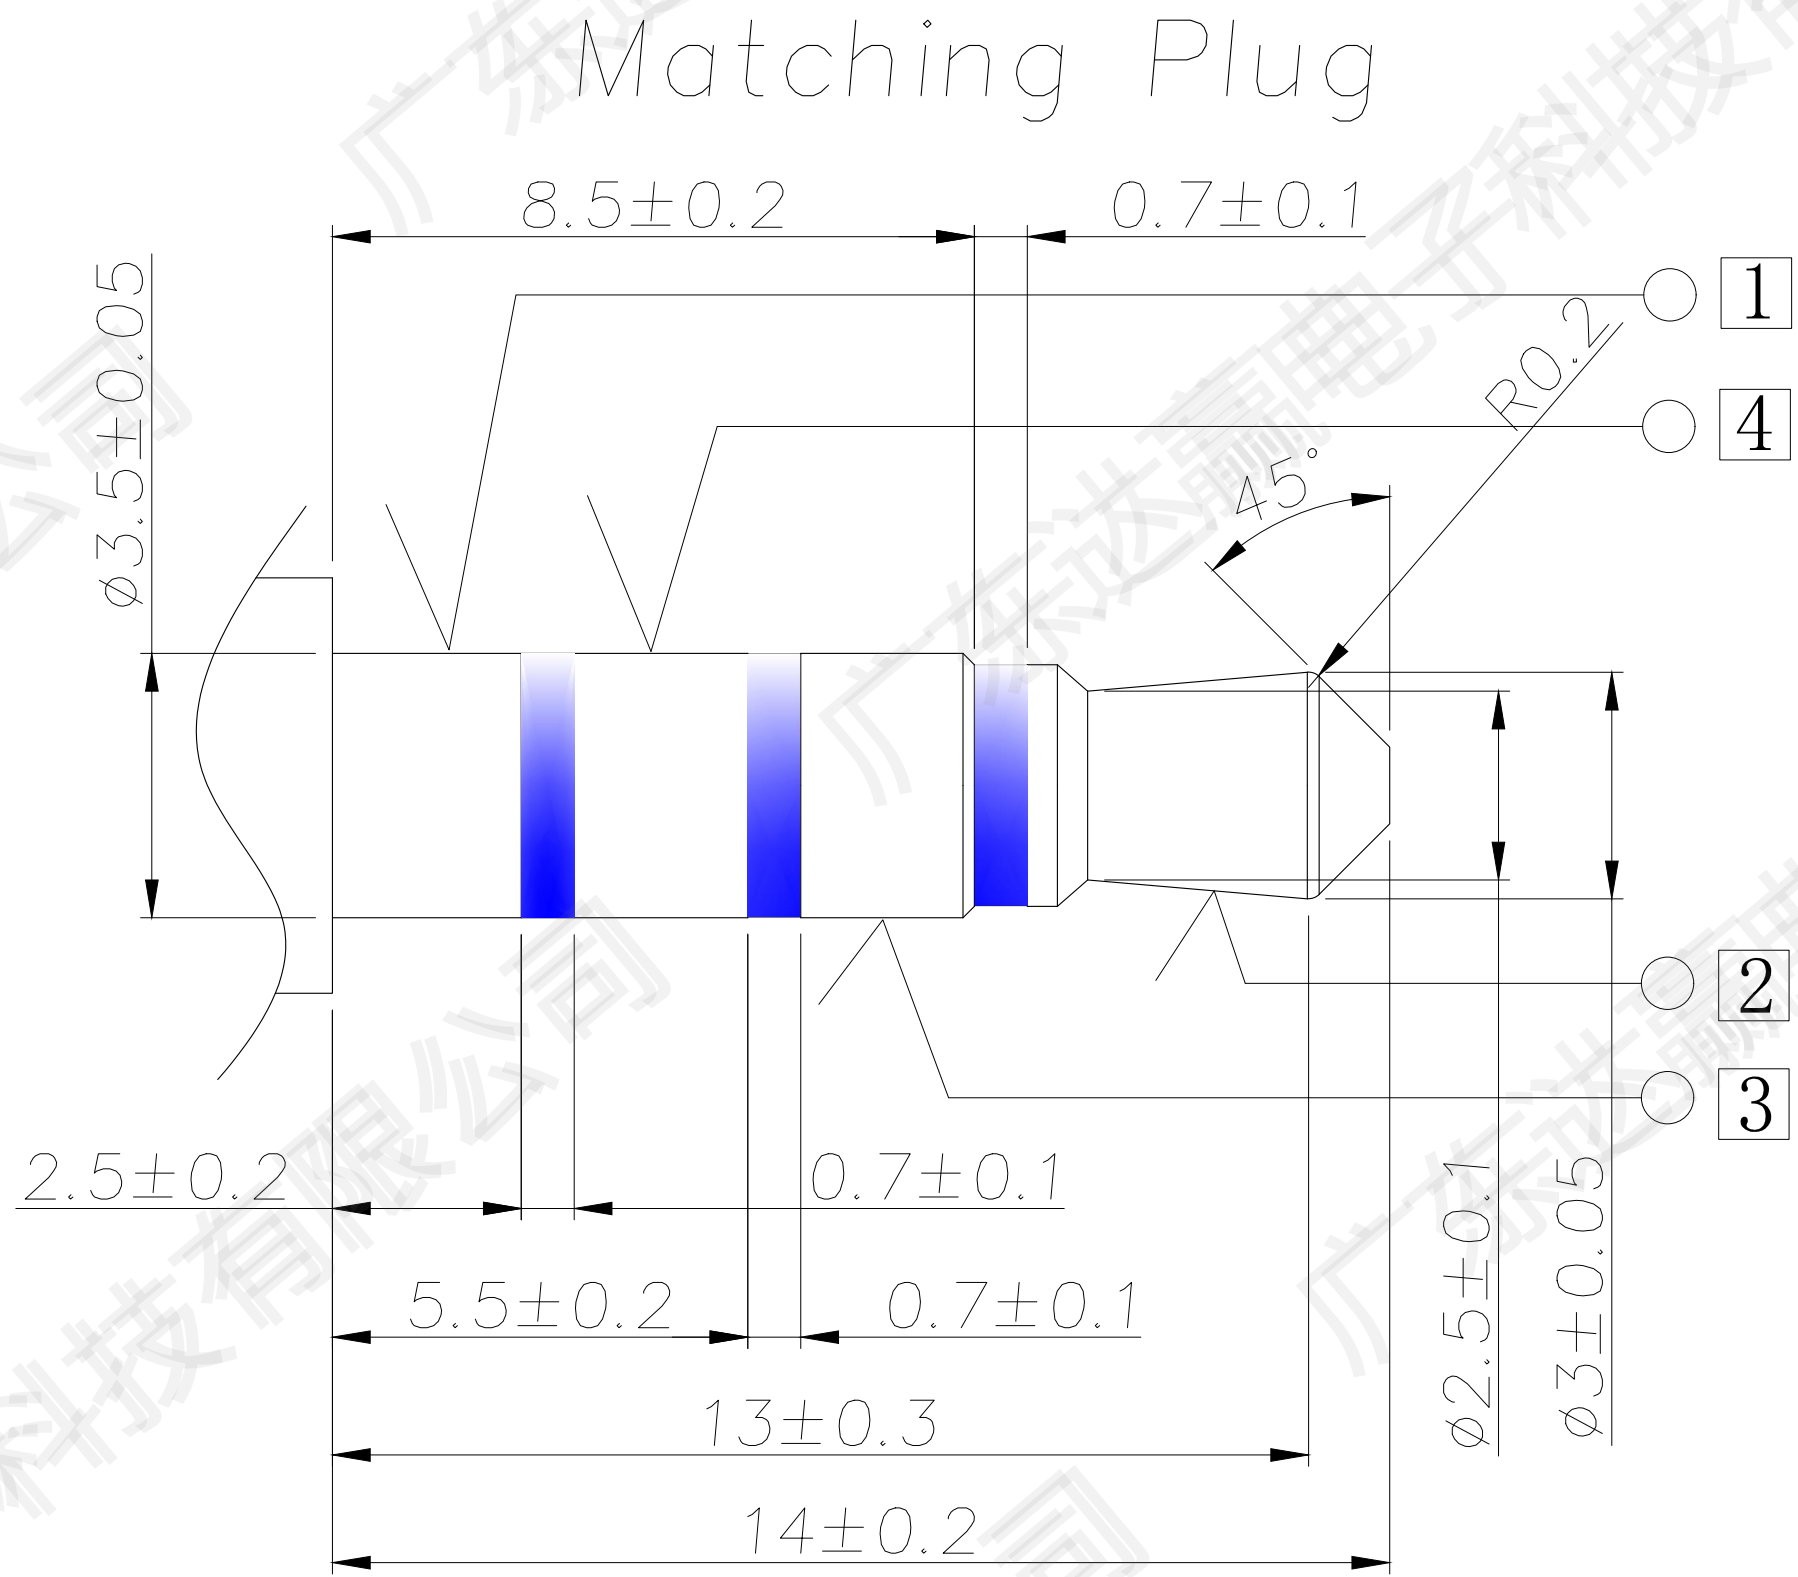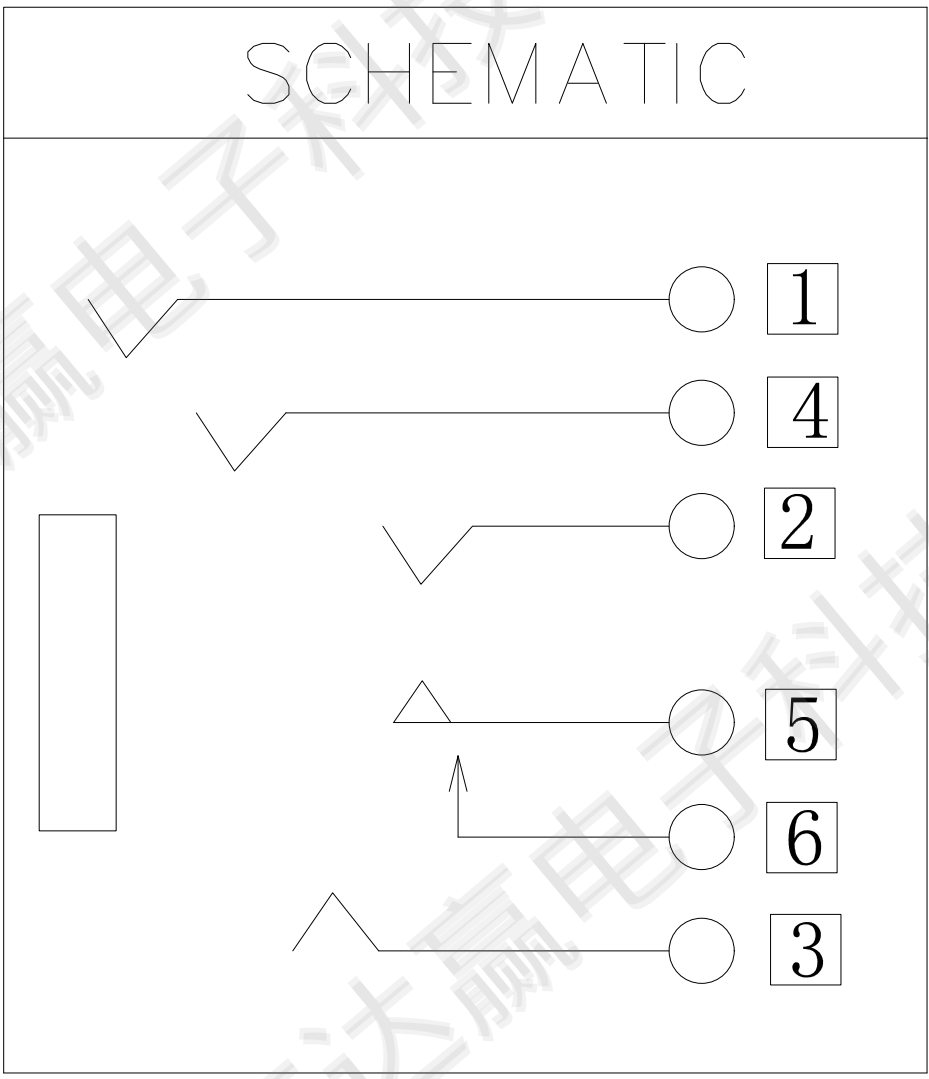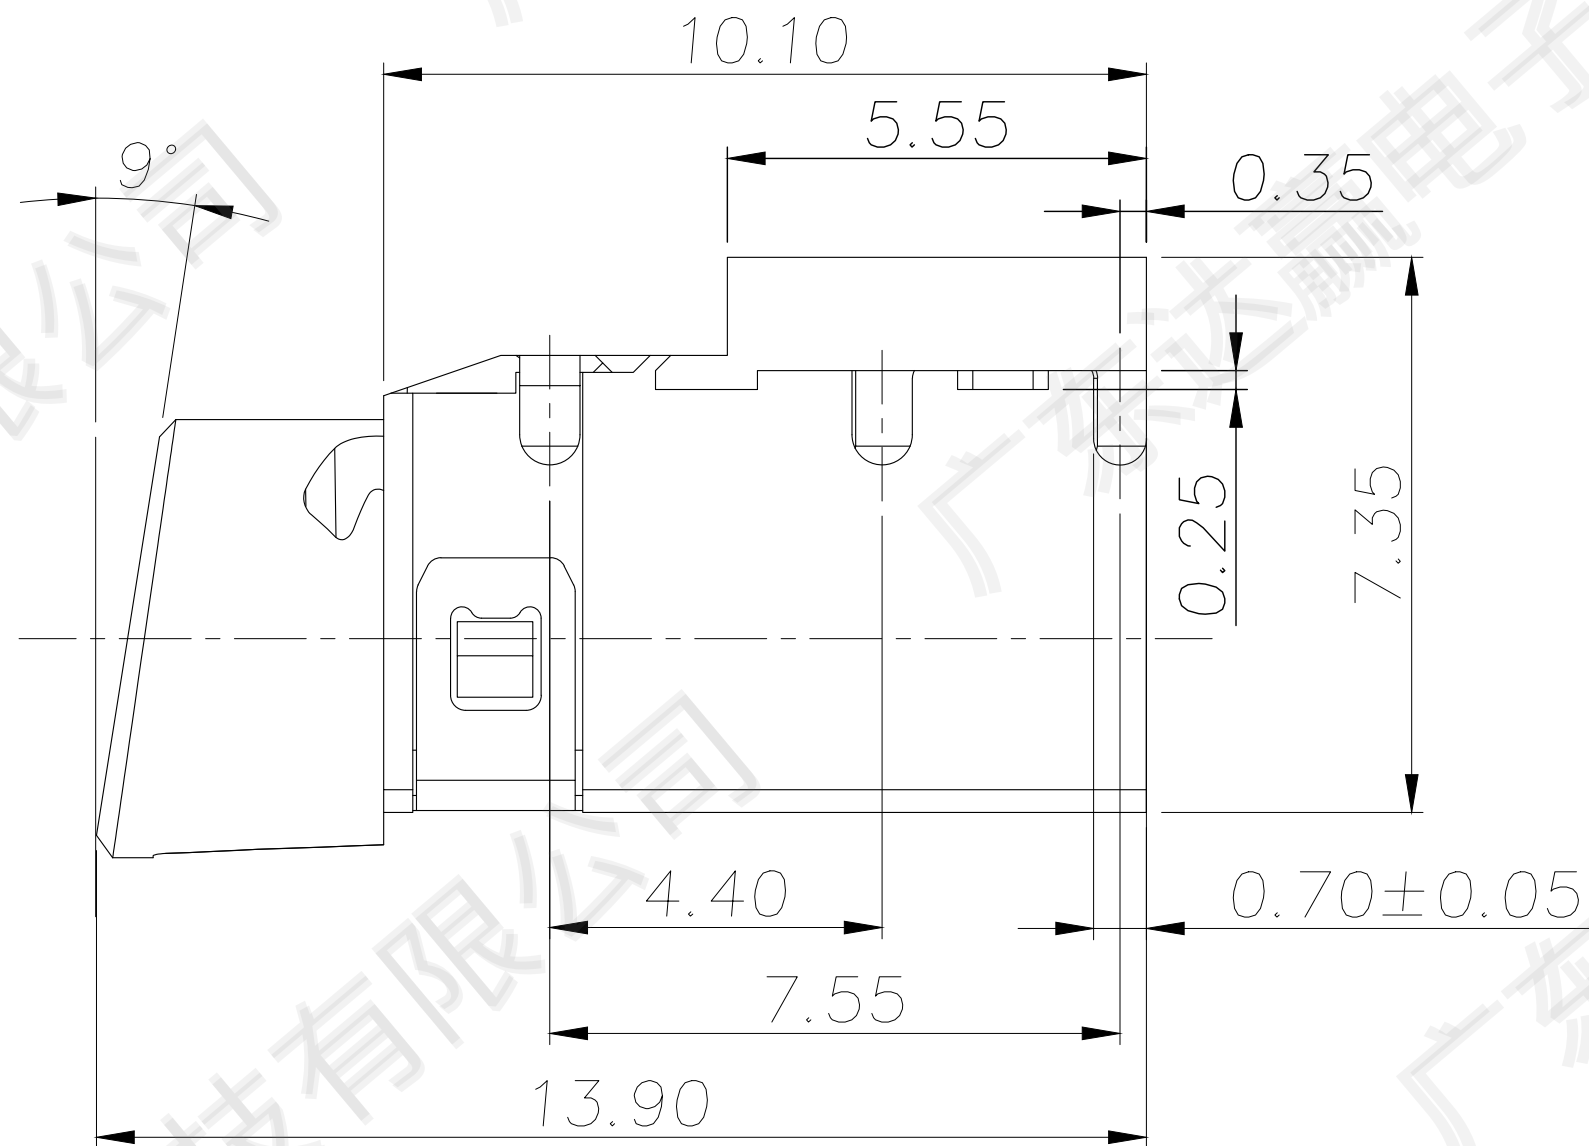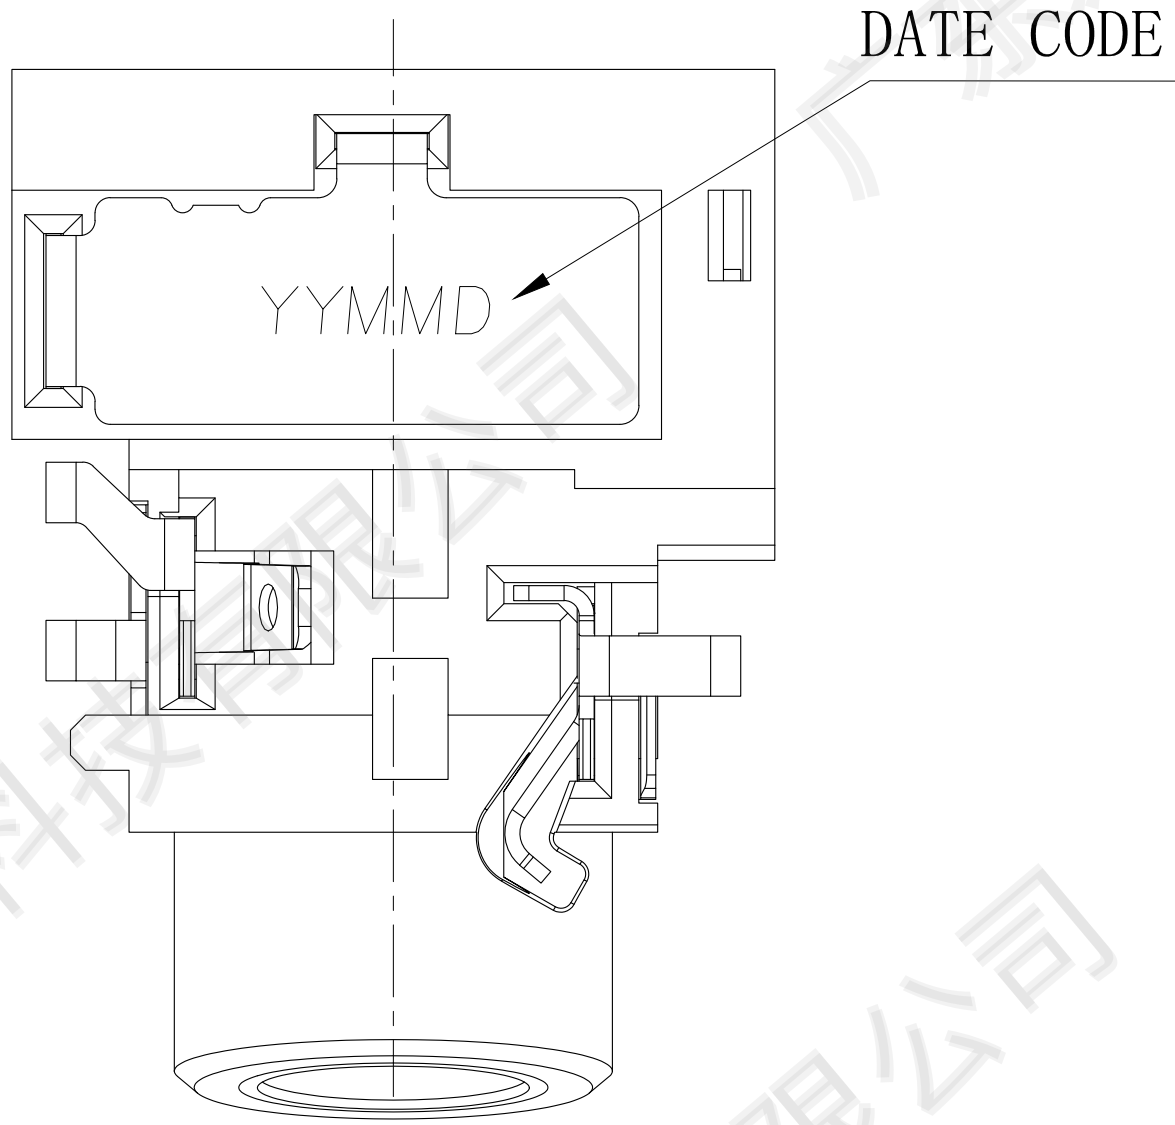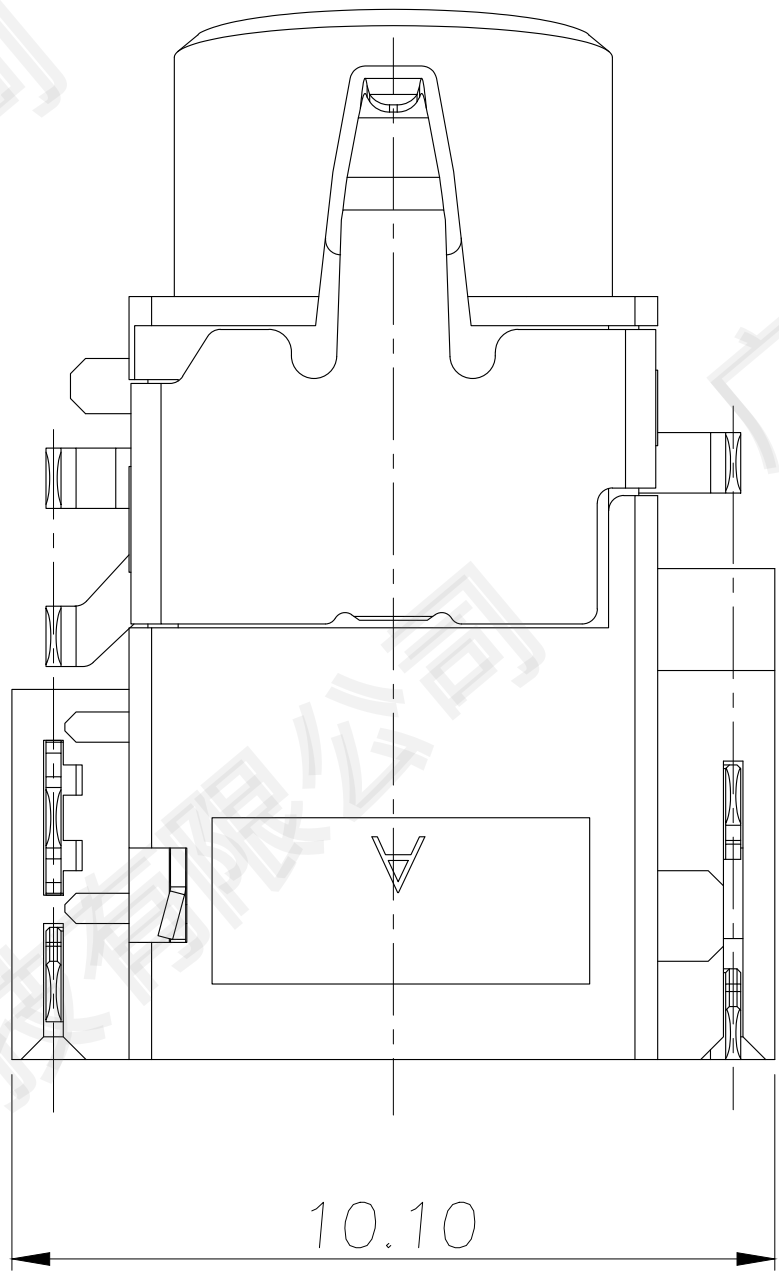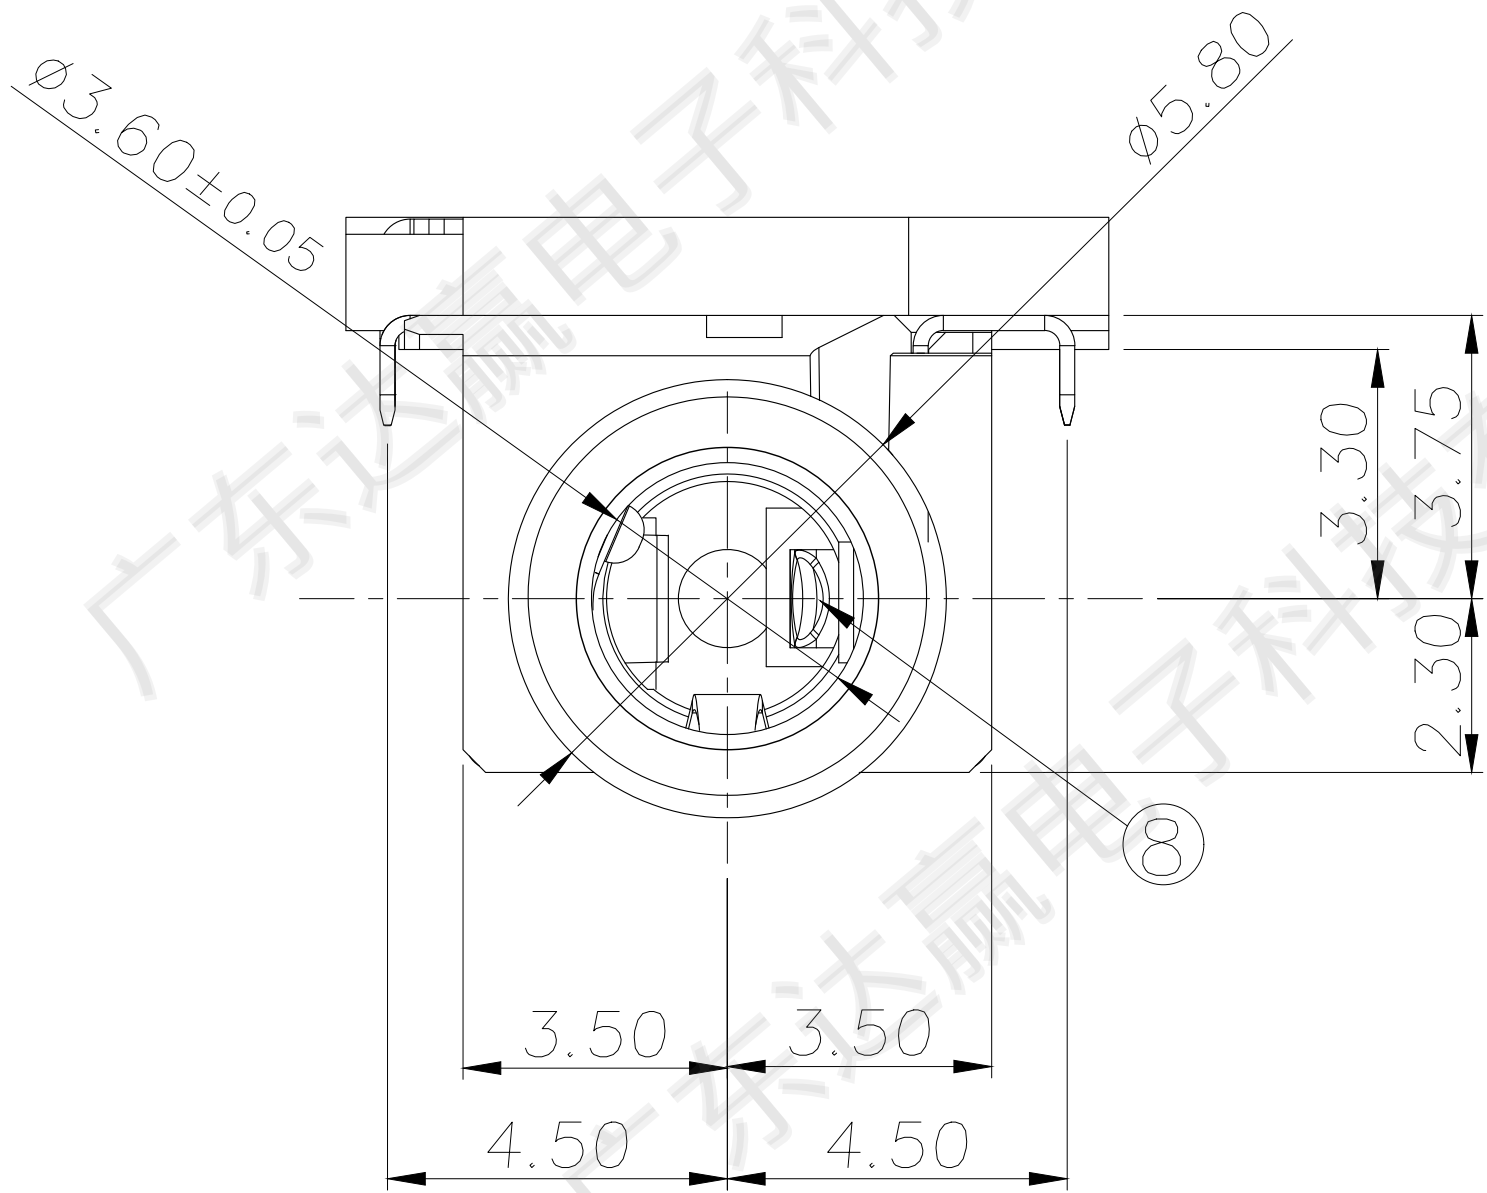

RECOMMENDED P. C. B LAYOUT
TOP VIEW (TOLRANCE:±0.05)

9	Housing	1	PA4T UL 94V-0	Black
8	Insulator	1	PA10T UL 94V-0	Black
7	shell	1	Phosphor bronze, 0.20t	Nickel Plated.
6	Shunt terminal	1	Phosphor bronze, 0.20t	Gold Flash On Contact Area And Solder Tail Area, All over Nickel Plated
5	Transfer Spring	1	Phosphor bronze, 0.20t	
4	Ring spring	1	Phosphor bronze, 0.20t	Au(See prat no.) On Contact Area .Gold Flash on Solder Tail Area ,All over 50U"Nickel Plated
3	Ring spring	1	Phosphor bronze, 0.20t	
2	Tip spring	1	Phosphor bronze, 0.20t	
1	Earth spring	1	Phosphor bronze, 0.20t	Au(See prat no.) On Contact Area .Gold Flash Plating Over all,All over 50U"Nickel Plated
NO.	DESCRIPTION	QTY	MATERIAL	REMARK



广东达赢电子科技有限公司
Guangdong DaYing Electronic Technology Co.,ltd.

						Angle	±2°	DESIGN	刘伟	2020.08.15
						.X	±0.38	CHECK		
						.XX	±0.25	APPROVAL		
	A-0	2020.08.15	NEW	刘伟	余军	.XXX	±0.10	SCALE: 3:1	UNIT:mm	A4
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: 3:1	UNIT:mm	A4

CUSTOMER DRAWING	TITLE:	Ø3.5mm PHONE JACK
	MODEL NO.	PJ-D3261G-ABK9AUXXL-RH
	FILE NO.	Q/DY.QW-001A-0715