

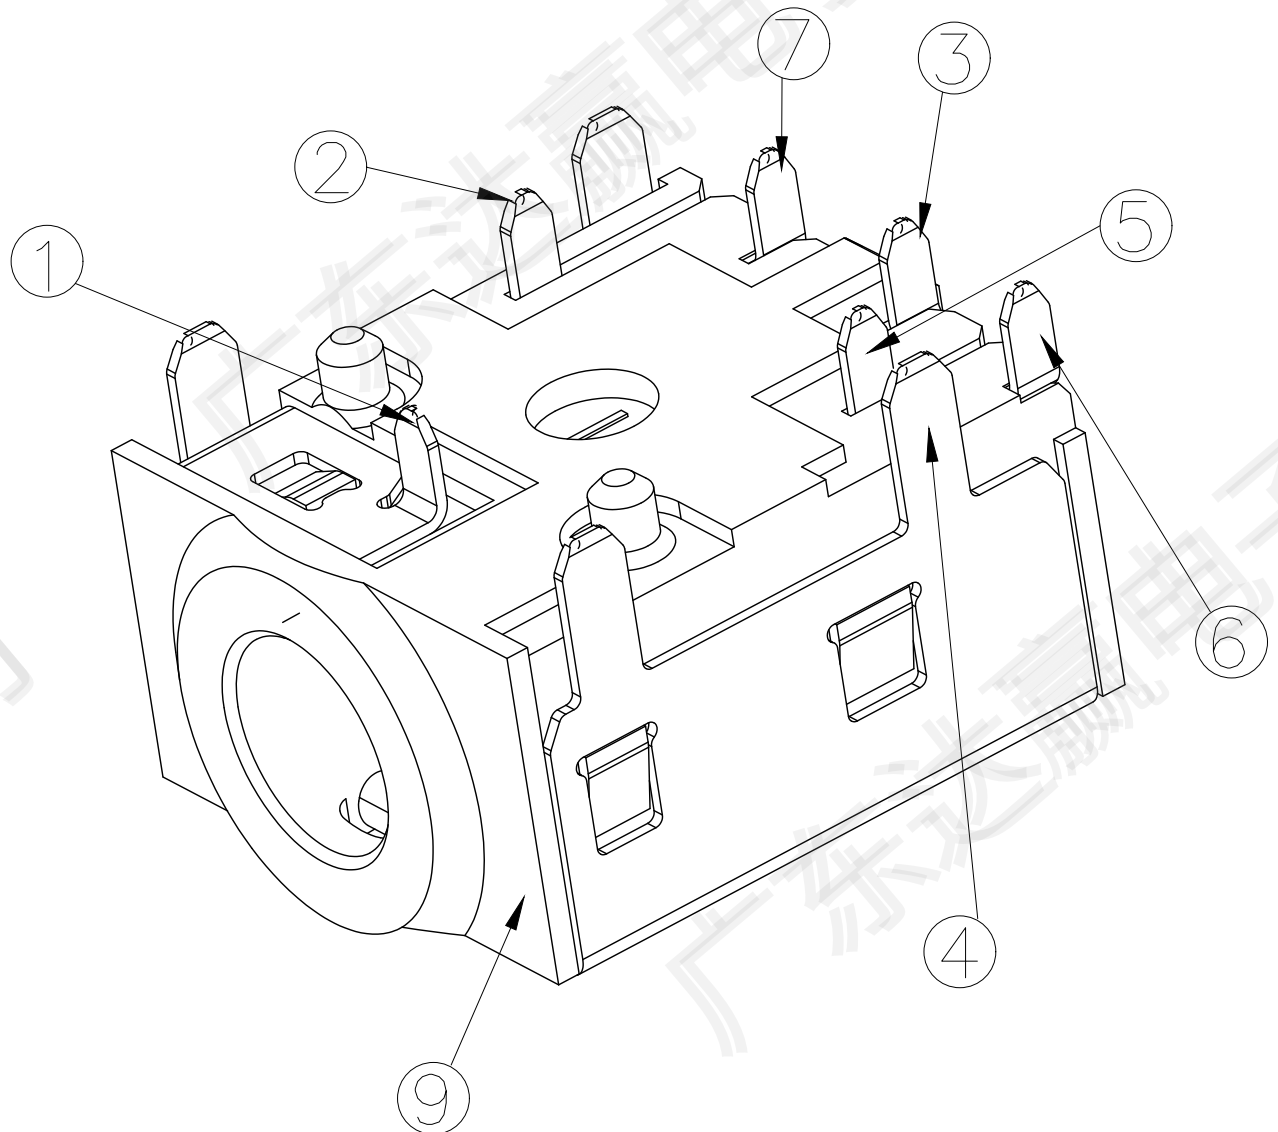
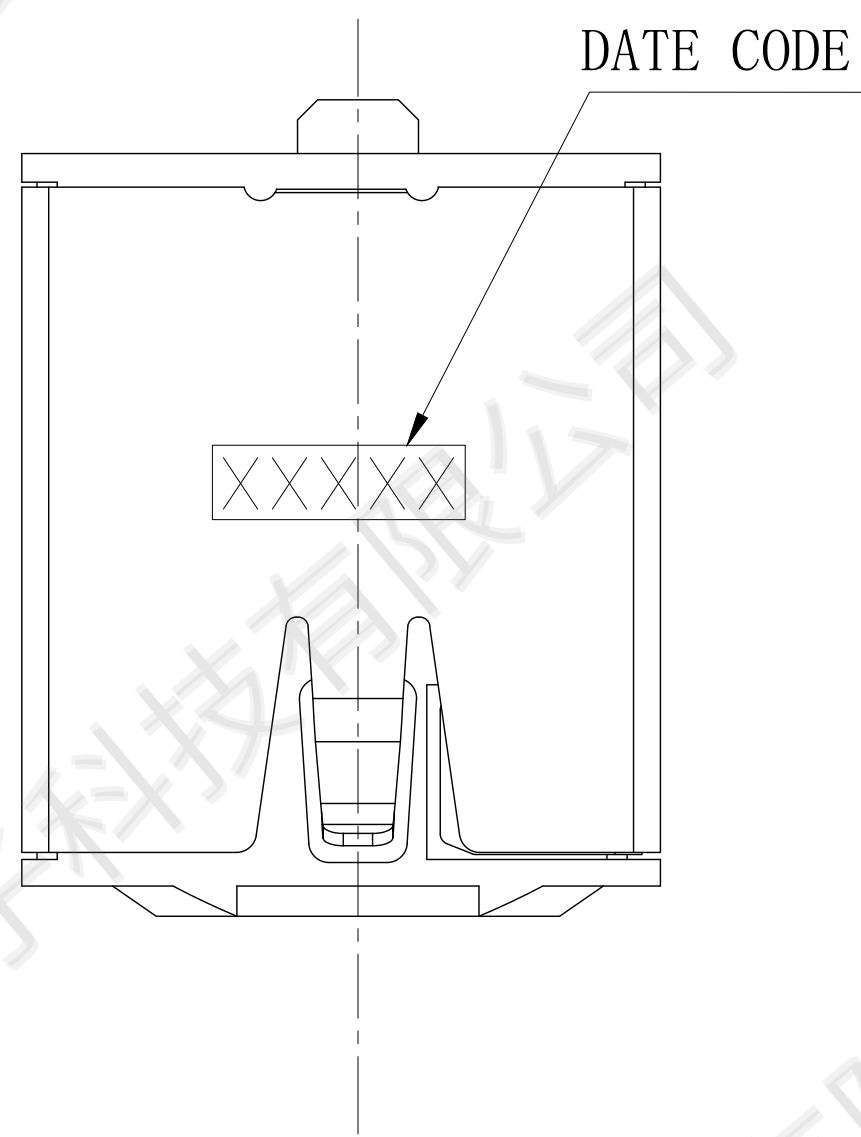
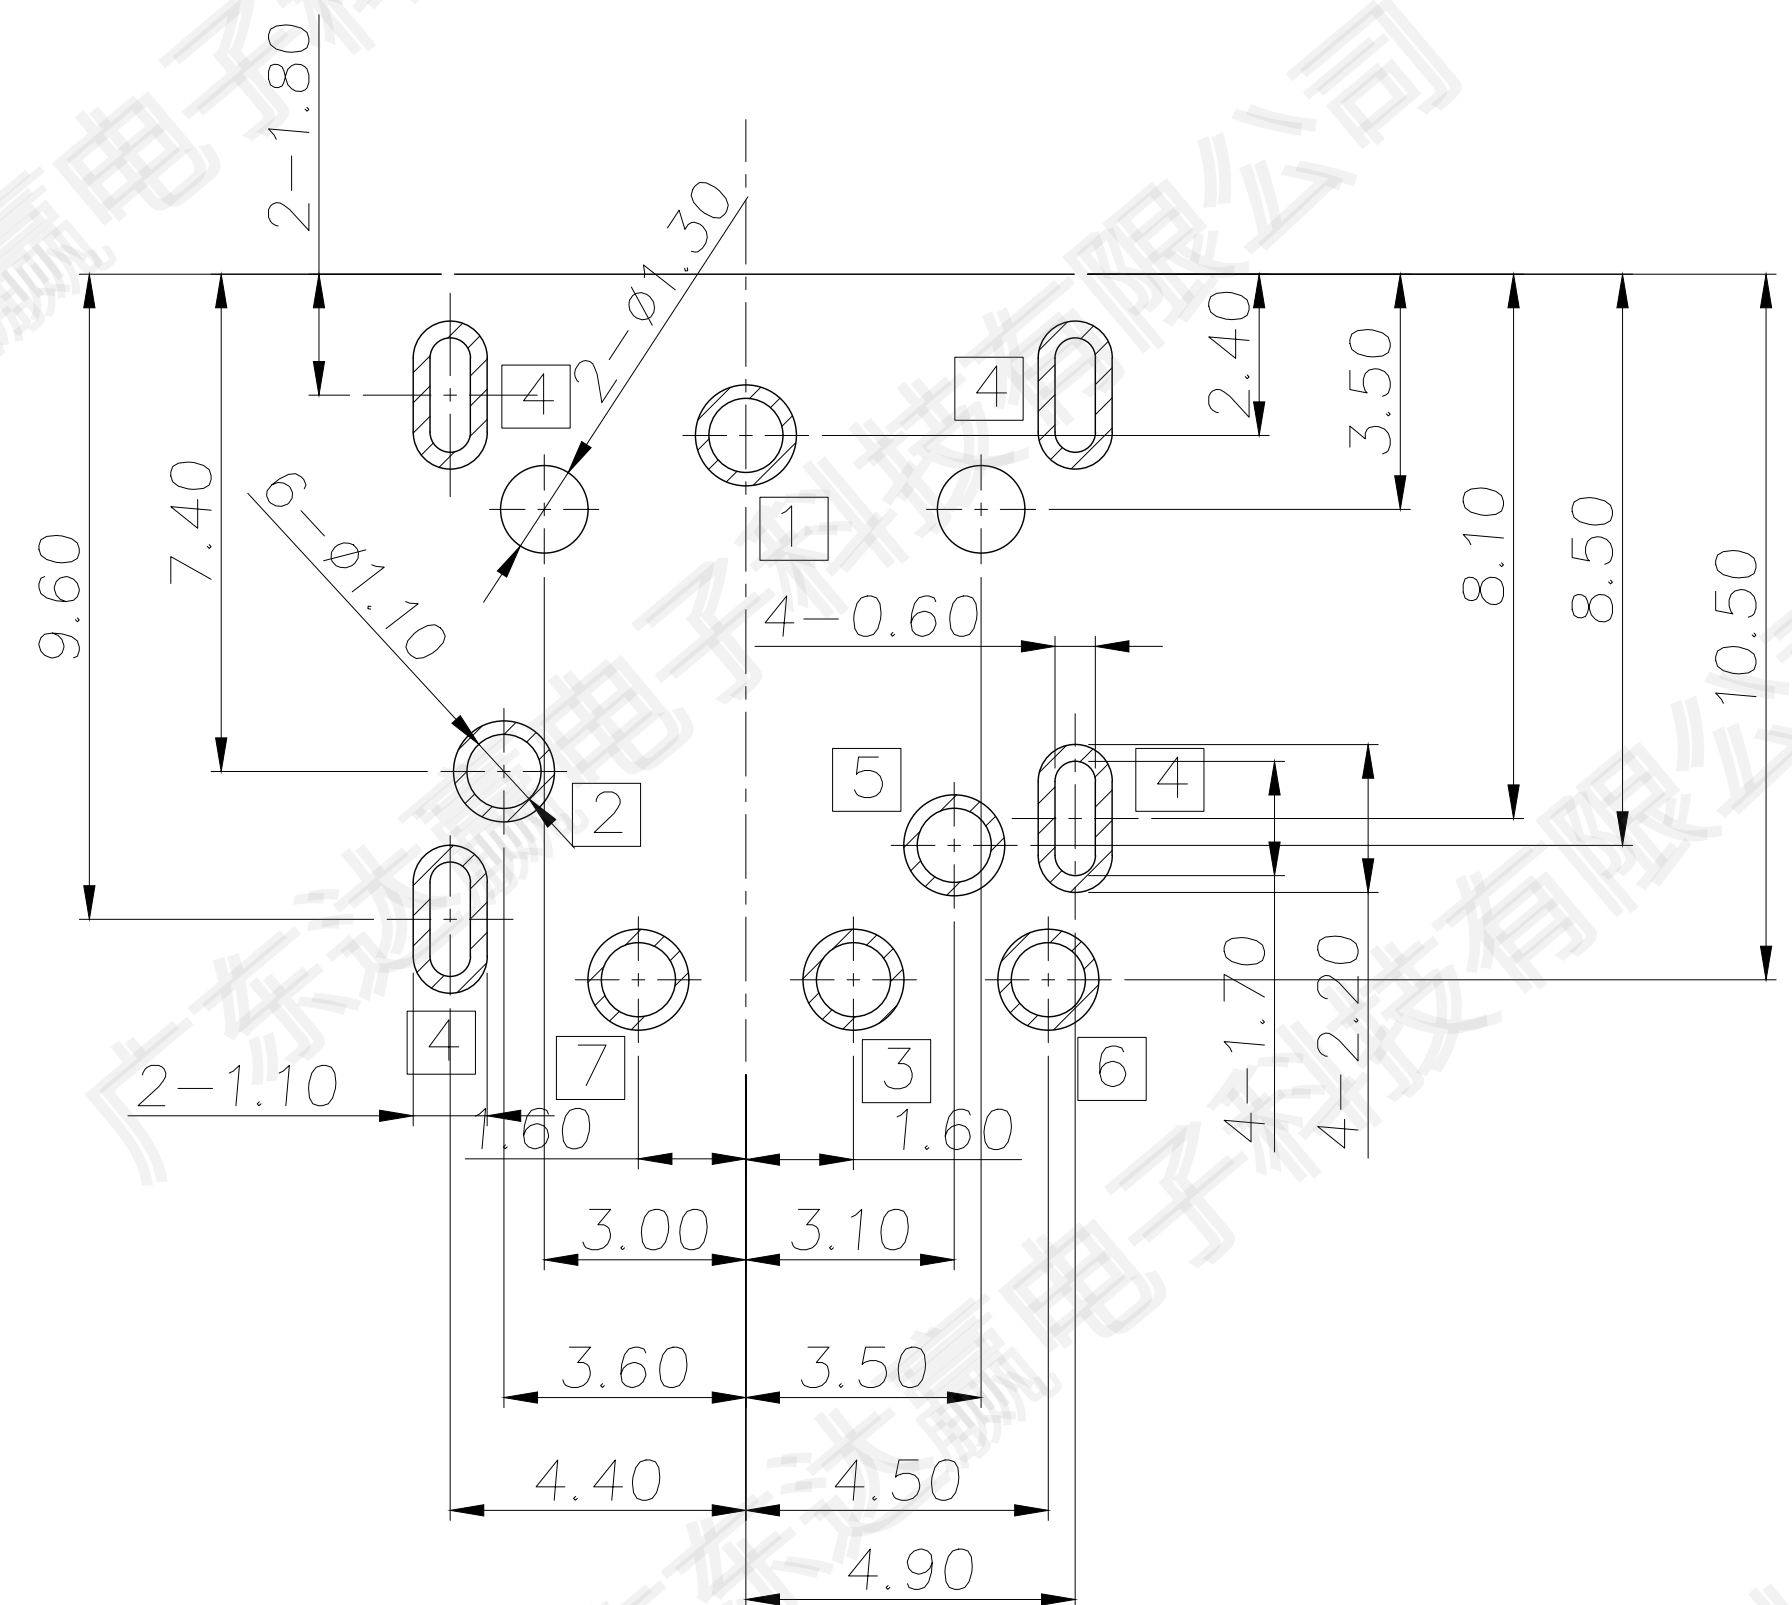
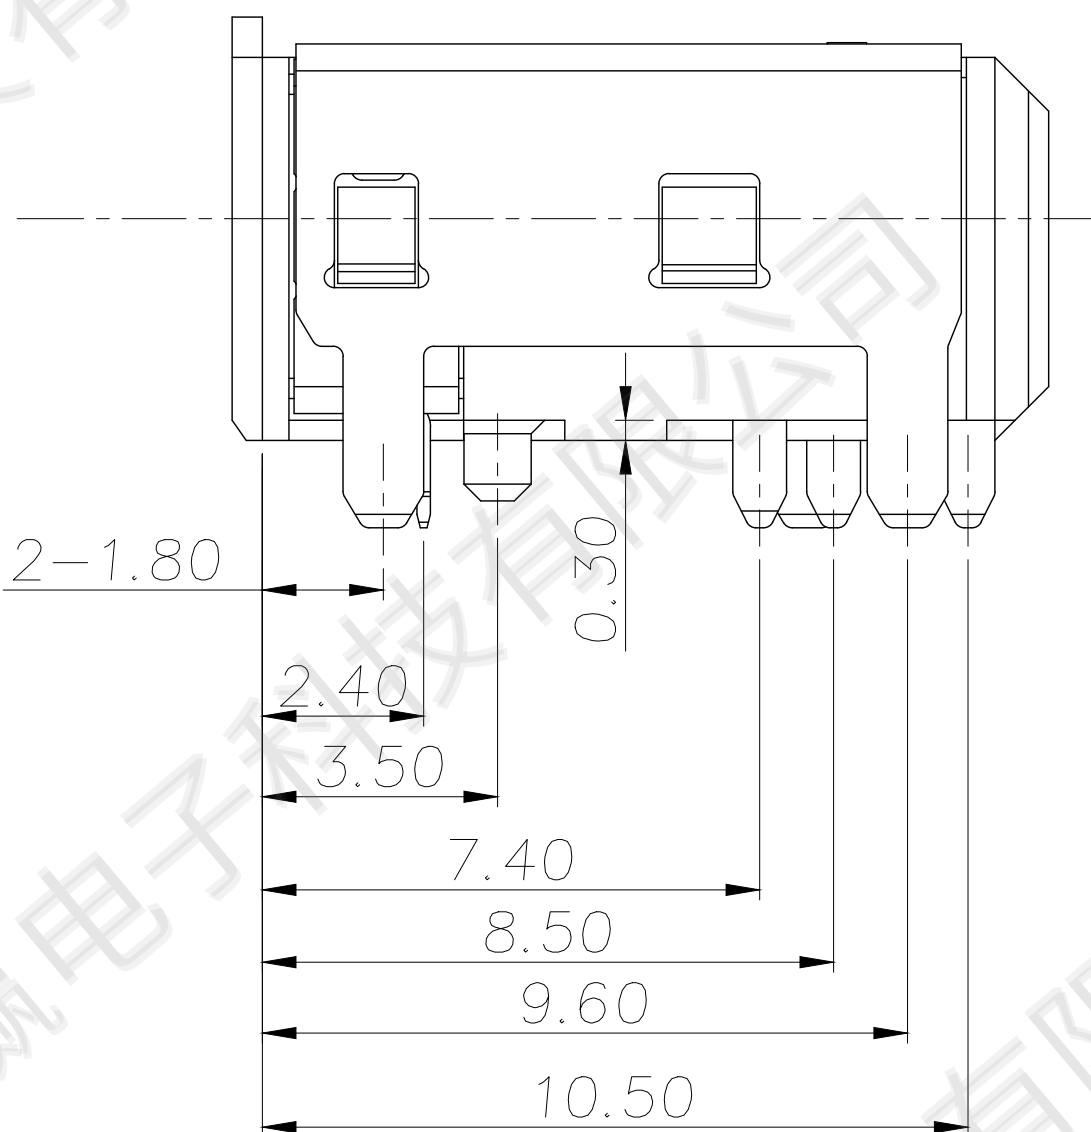
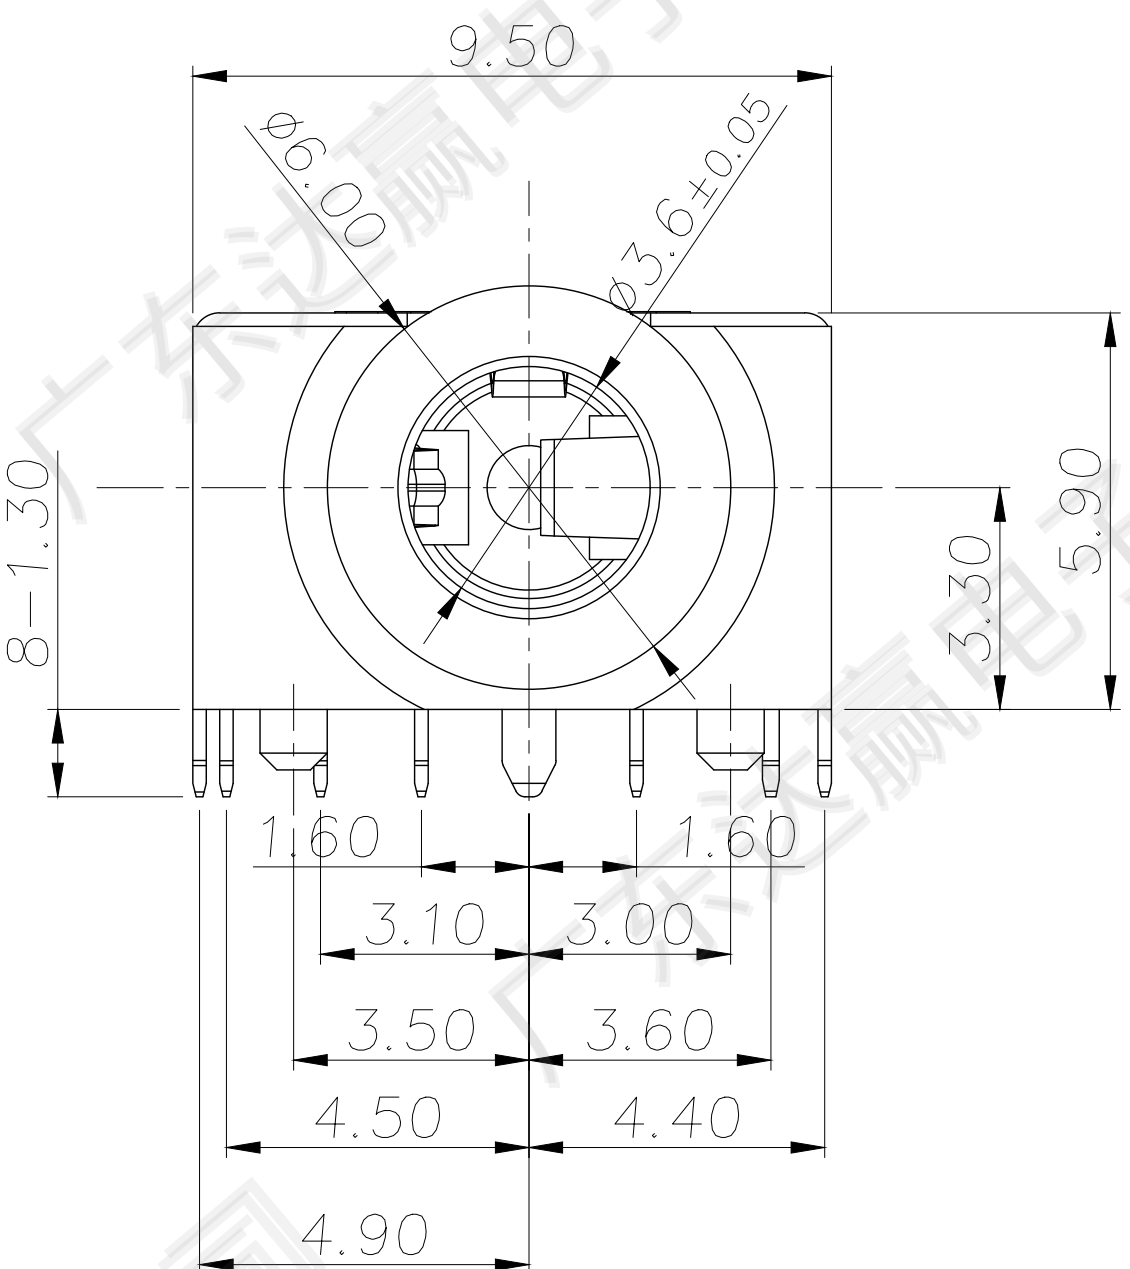


SPECIFICATION:

- 1.Electrical characteristics
- 1-1.Current rating:DC 0.5A max.
- 1-2.Voltage rating:DC 30V.
- 1-3:Contact resistance:50mΩ max.
- 1-4.Insulation resistance:100MΩ min. at 500V DC.
- 1-5.Withstanding voltage:500V AC for 1 minute.
- 2.Mechanical characteristics
- 2-1.Life test:5000 cycles min,
- 2-2.Mating force:3~30N,
- Unmating force:3~30N.

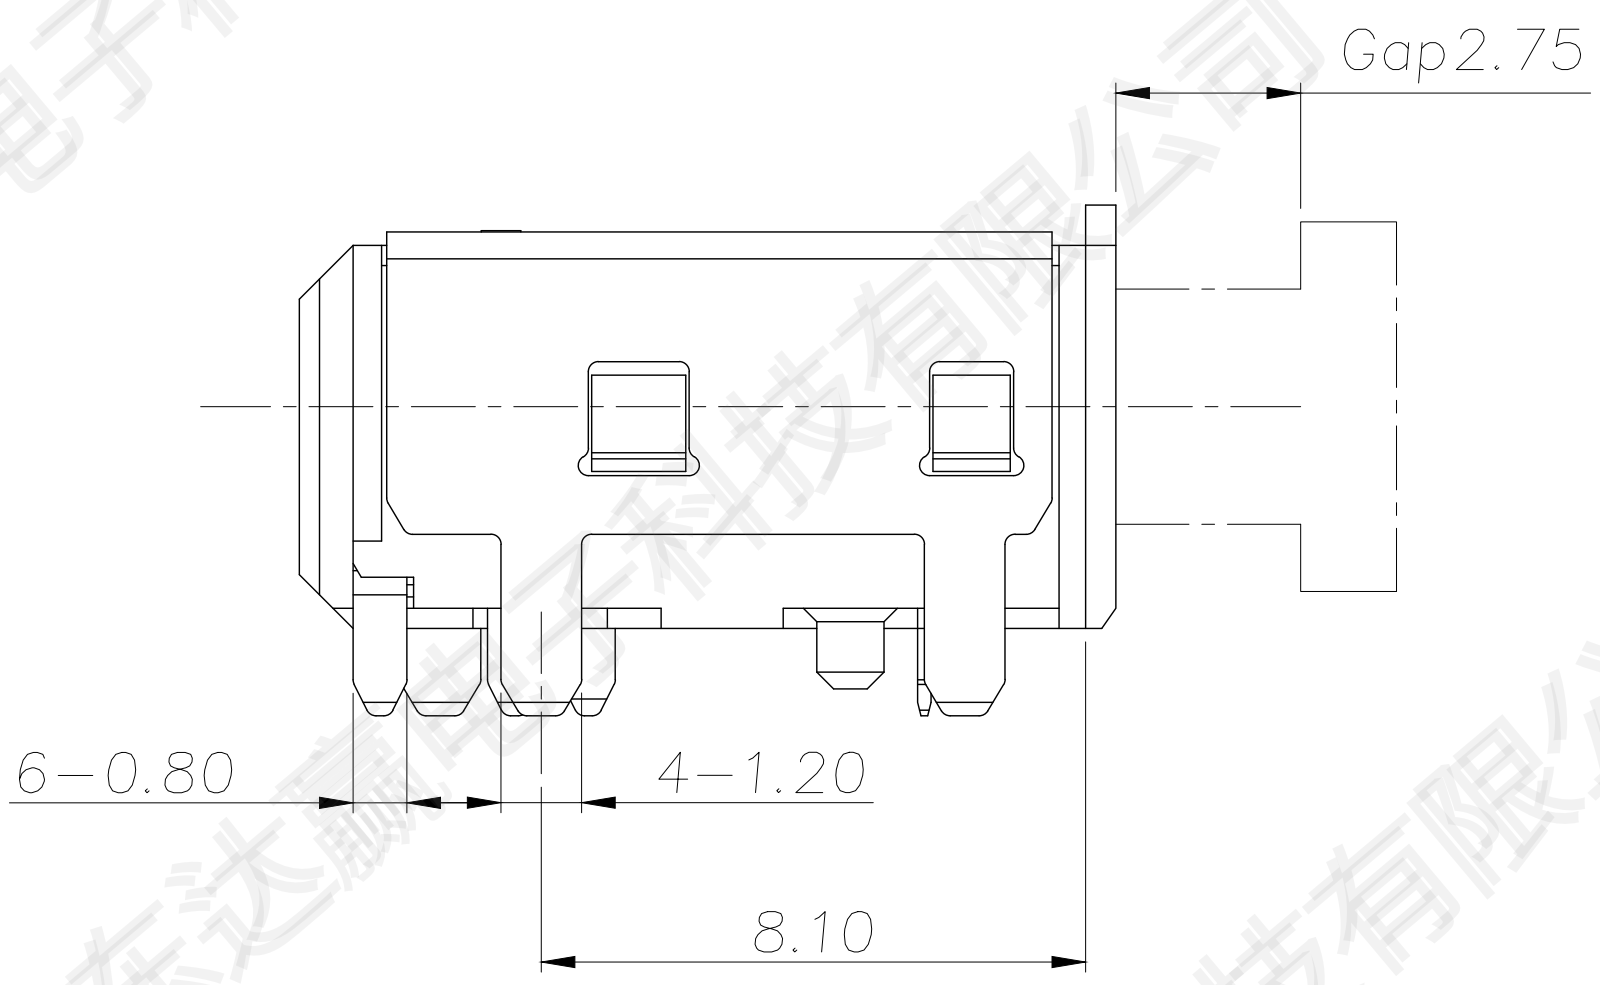

Matching Plug

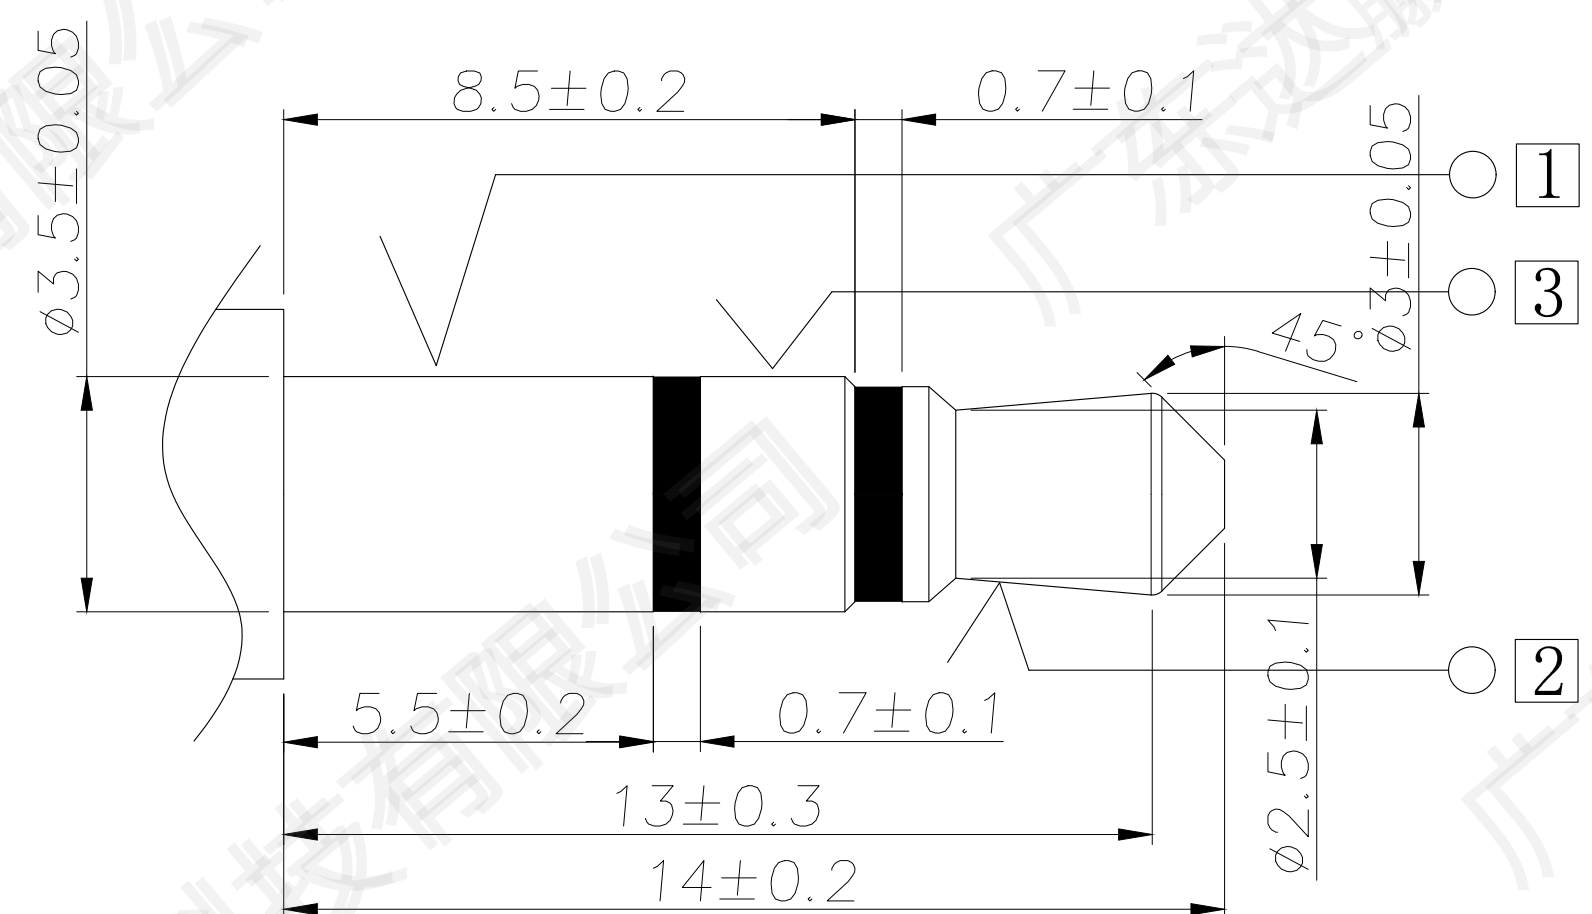

MODEL NO. :

PJ-D32360-ABK7AS06L-RH

(1) (2) (3) (4) (5) (6)

(1) Series no.

(2) Schematic type: A,

(3) Housing color:

BK7=Black



(4) Terminal plating:

AS06=Plating Tin/AU 30" min.

(5) Packing mode:L=Reel packing

(6) Environmental requirements:

Rh=RoHS 2.0 +Halogen Free

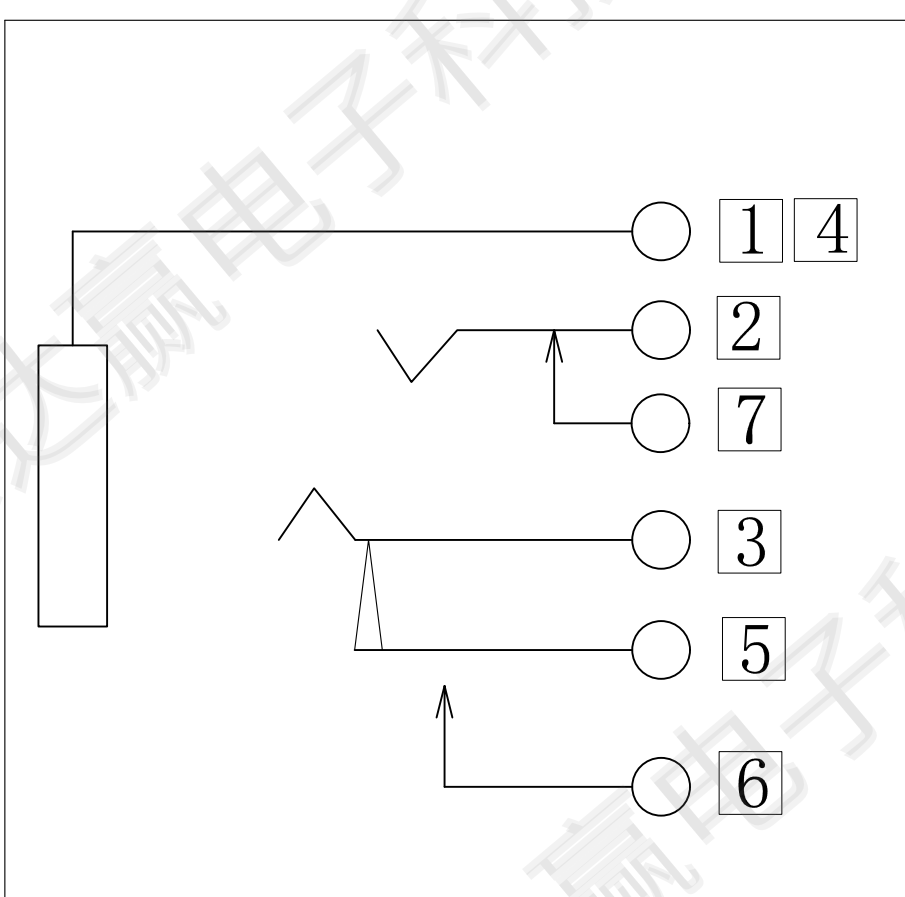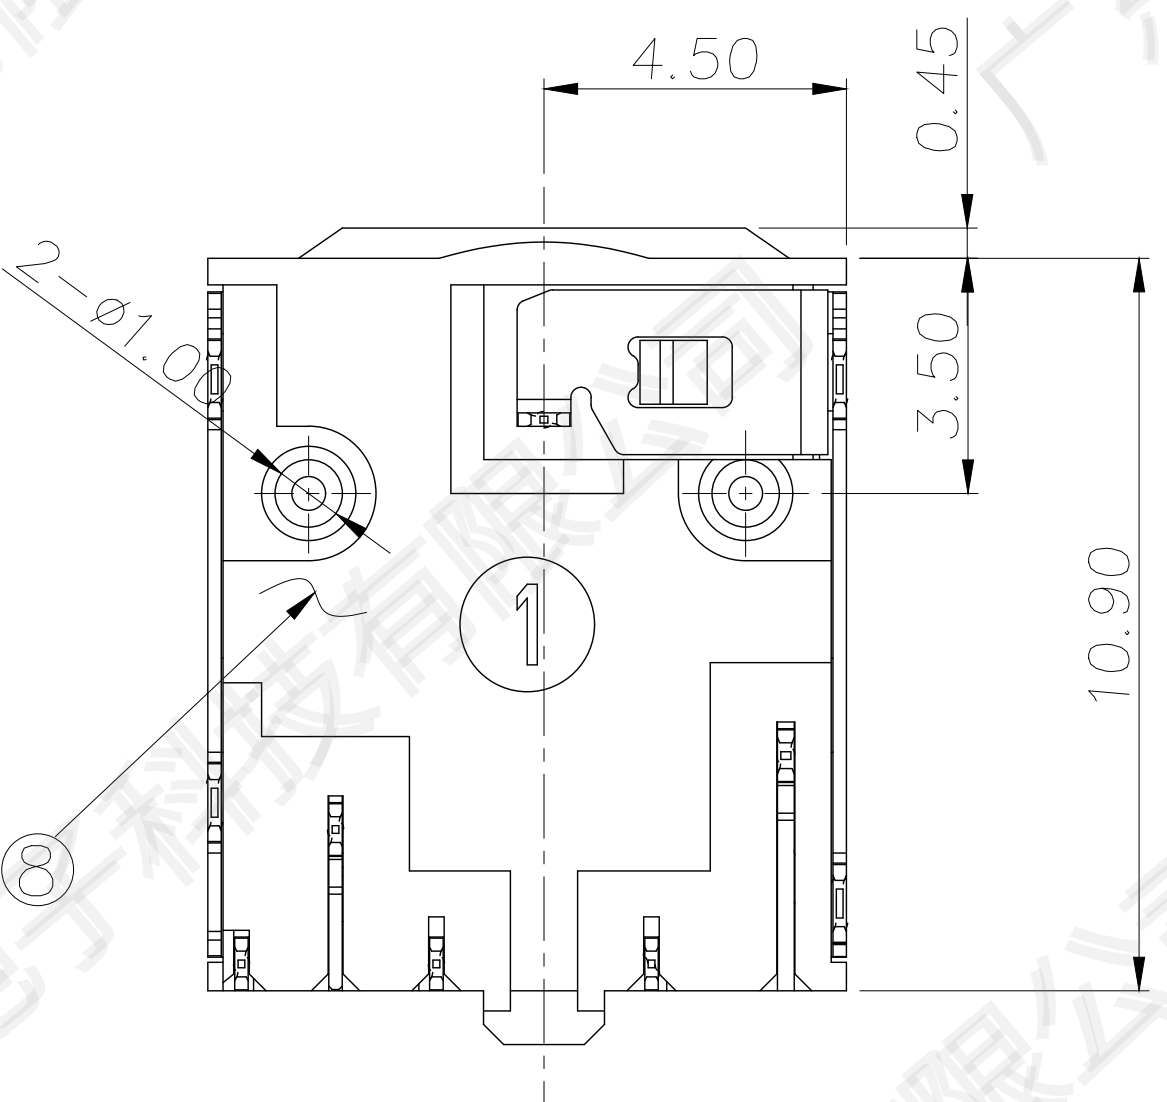

Circuit Diagram

RECOMMENDED P. C. B LAYOUT (t=1.0mm)

TOP VIEW (TOLRANCE: ±0.05)

9	Housing	1	PA10T R630NH+30%GF UL 94V-0	Black
8	Insulator	1	PA10T R630NH+30%GF UL 94V-0	Black
7	Shunt terminal	1	Phosphor bronze, 0.25t	Gold Flash .
6	Shunt terminal	1	Phosphor bronze, 0.20t	Gold Flash On Contact Area, Tin Plating on Solder Tail Area, All over Nickel Plated
5	Transfer Spring	1	Phosphor bronze, 0.20t	
4	Shell	1	Phosphor bronze, 0.20t	
3	Ring spring	1	Phosphor bronze, 0.20t	30u" Au On Contact Area, Tin Plating on Solder Tail Area, All over Nickel Plated
2	Tip spring	1	Phosphor bronze, 0.20t	
1	Earth spring	1	Phosphor bronze, 0.20t	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

						Angle	±2°	DESIGN	李海鸥	2015.07.22
						. x	±0.30	CHECK		
						. xx	±0.25	APPROVAL		
	A-0	2015.07.22	NEW	李海鸥	余 军	. xxx	±0.10	SCALE: 3:1	UNIT:mm	A4
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED				SHEET:1 of 1

广东达赢电子科技有限公司
Guangdong DaYing Electronic Technology Co., Ltd.

TITLE: **Ø3.5mm PHONE JACK**

MODEL NO. **PJ-D32360-ABK7AS06L-RH**

FILE NO. **Q/SSY.QW-001A-0564**