
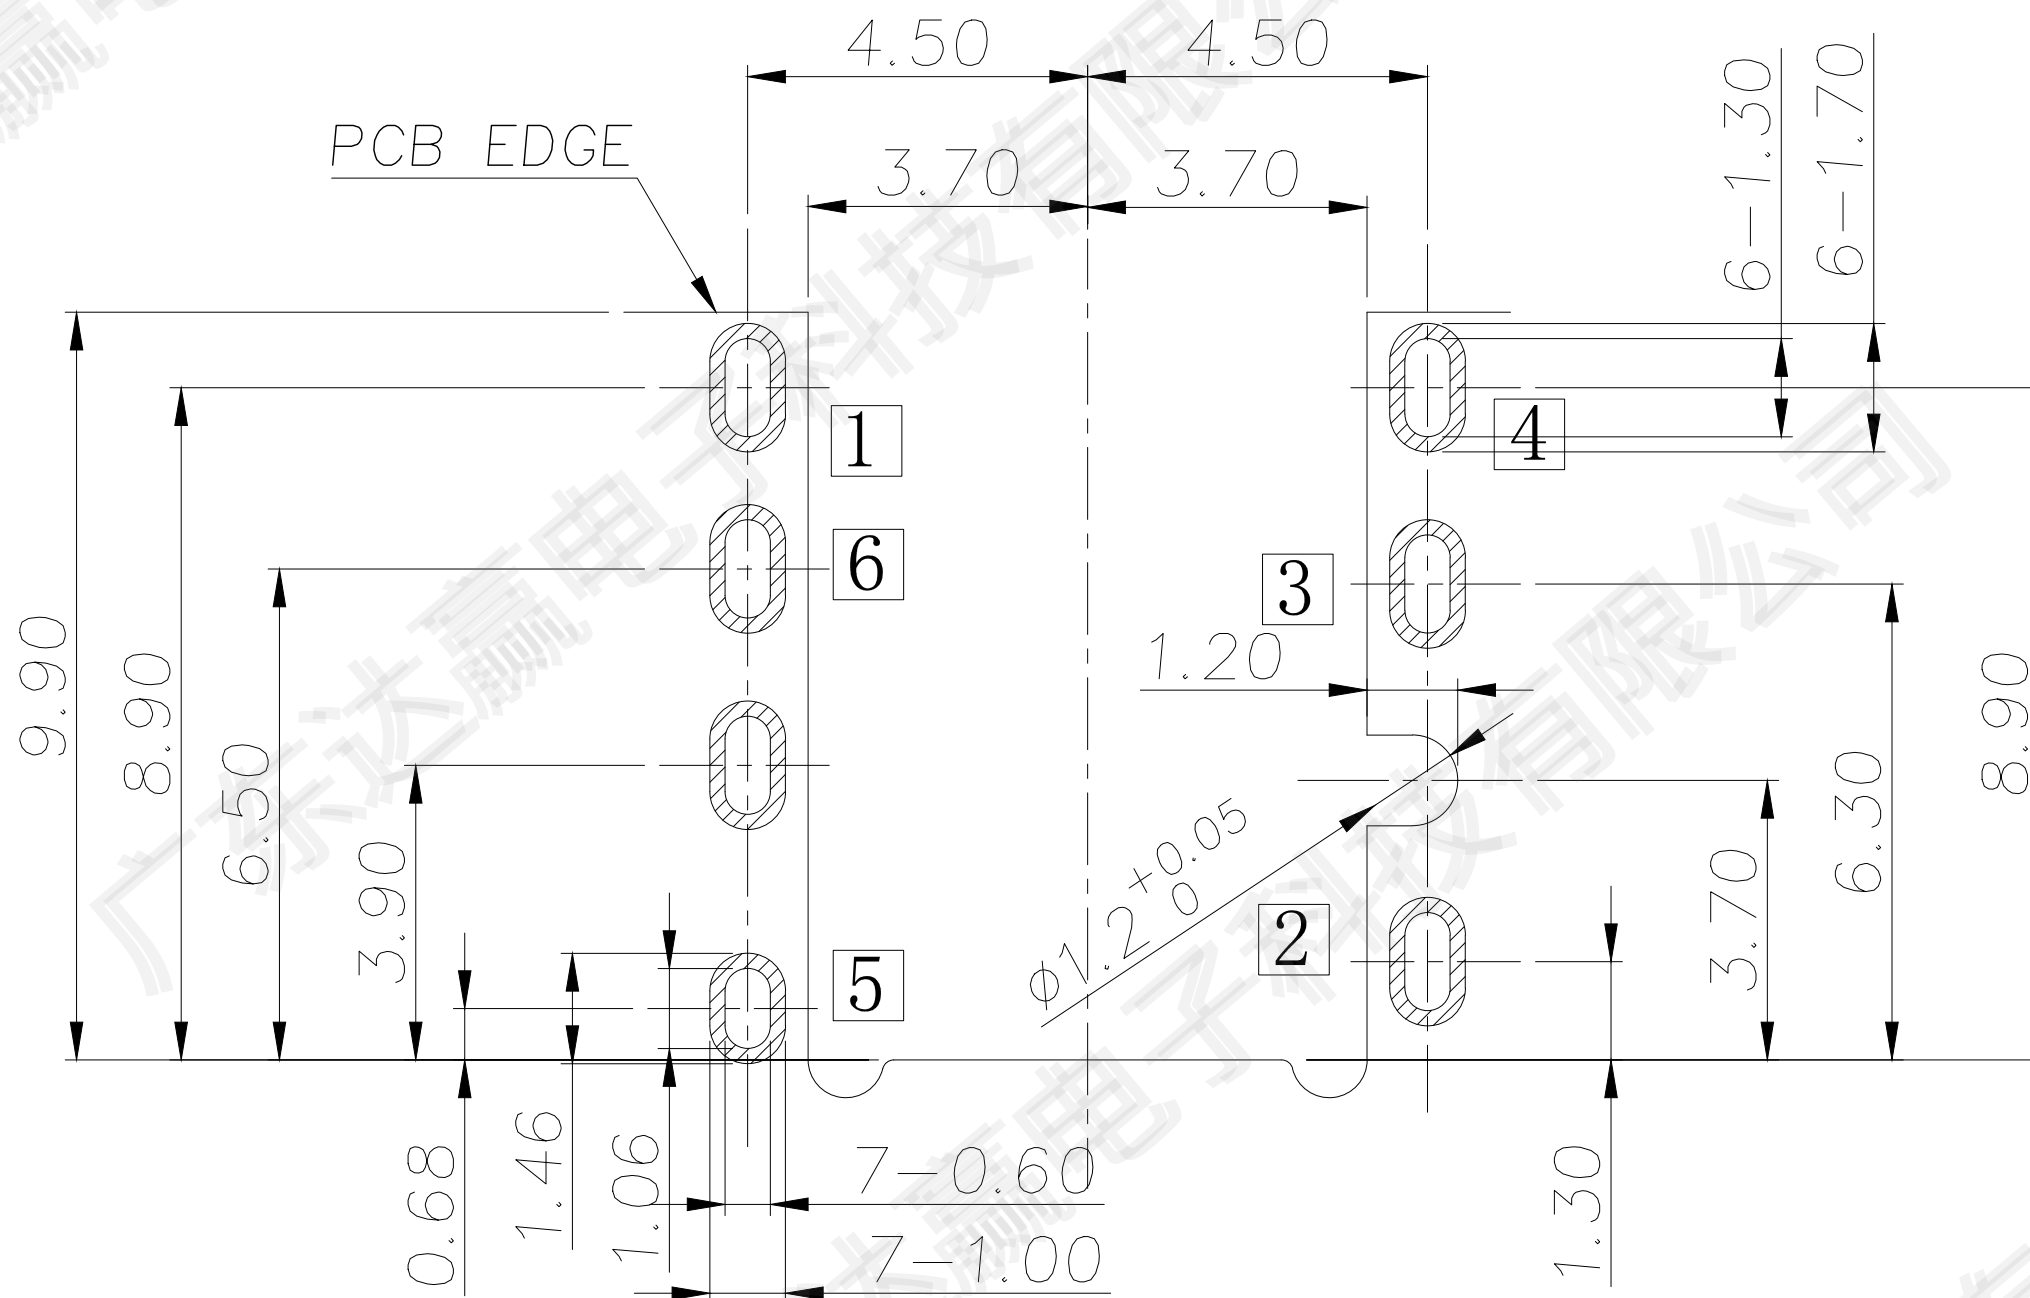
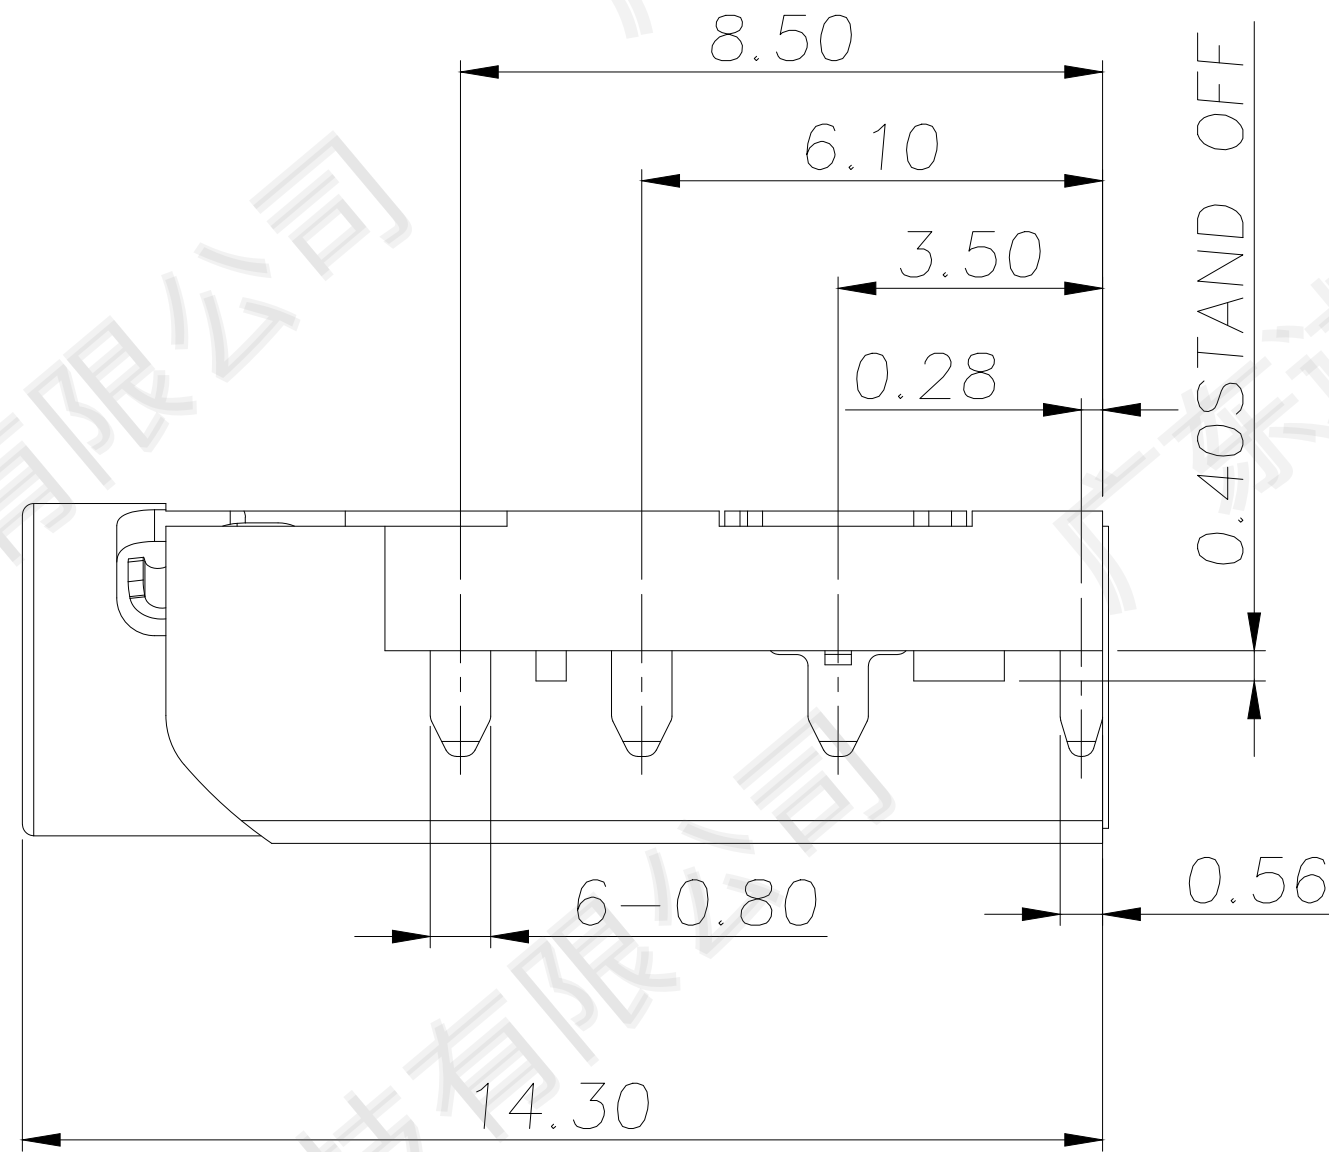
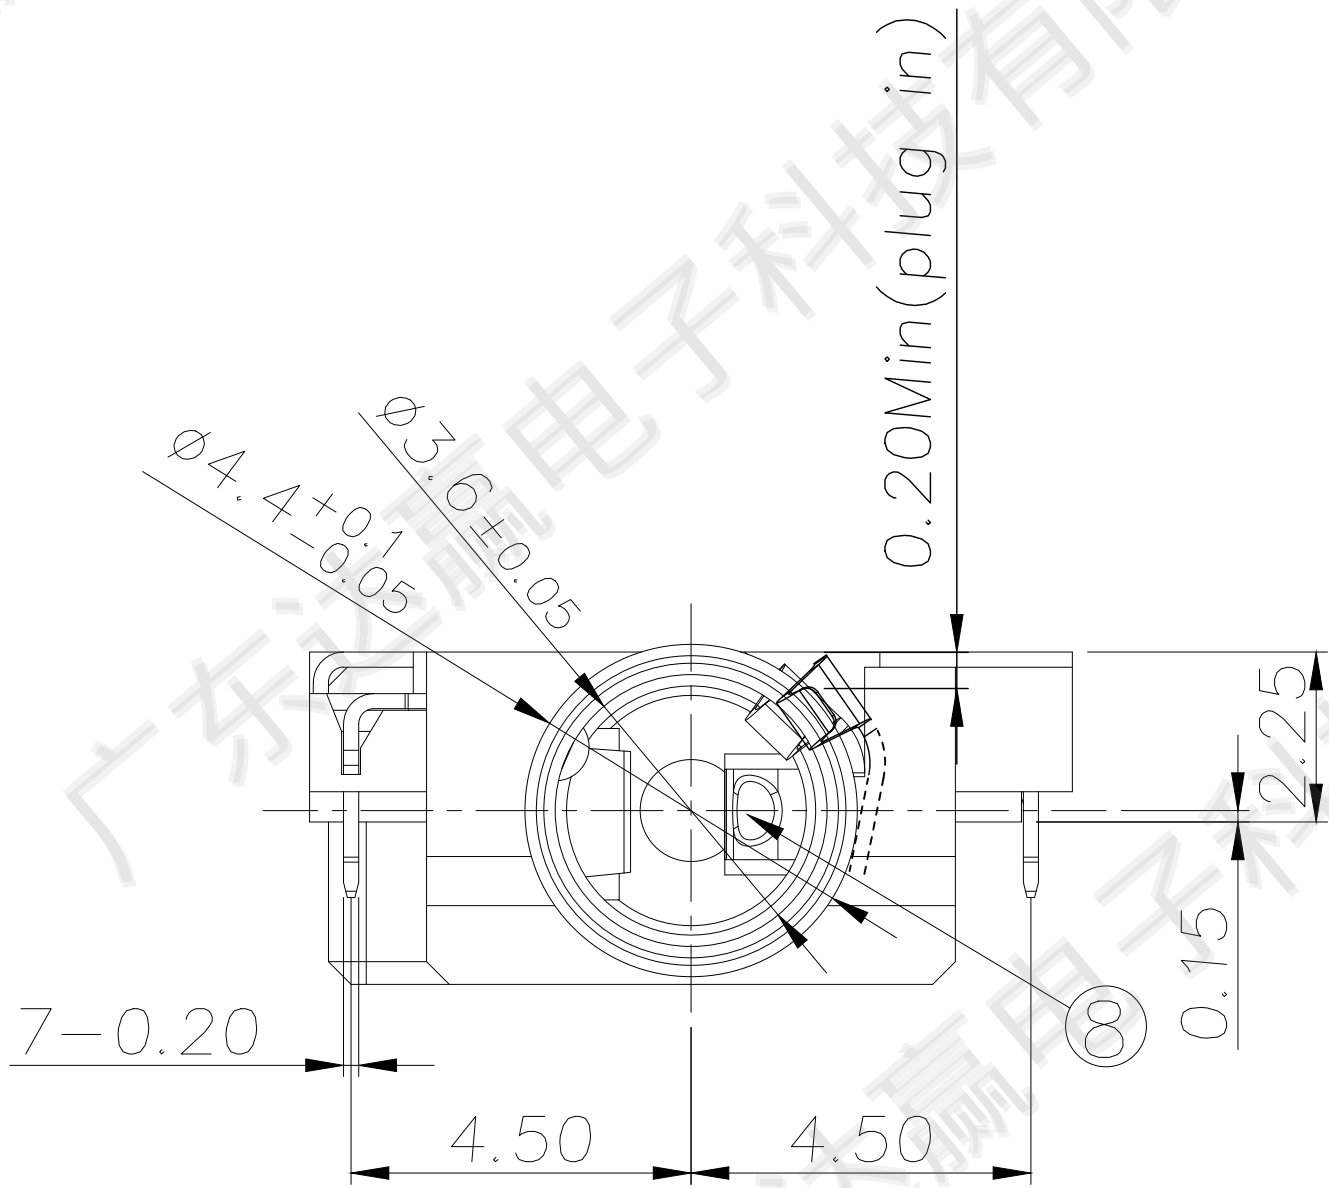
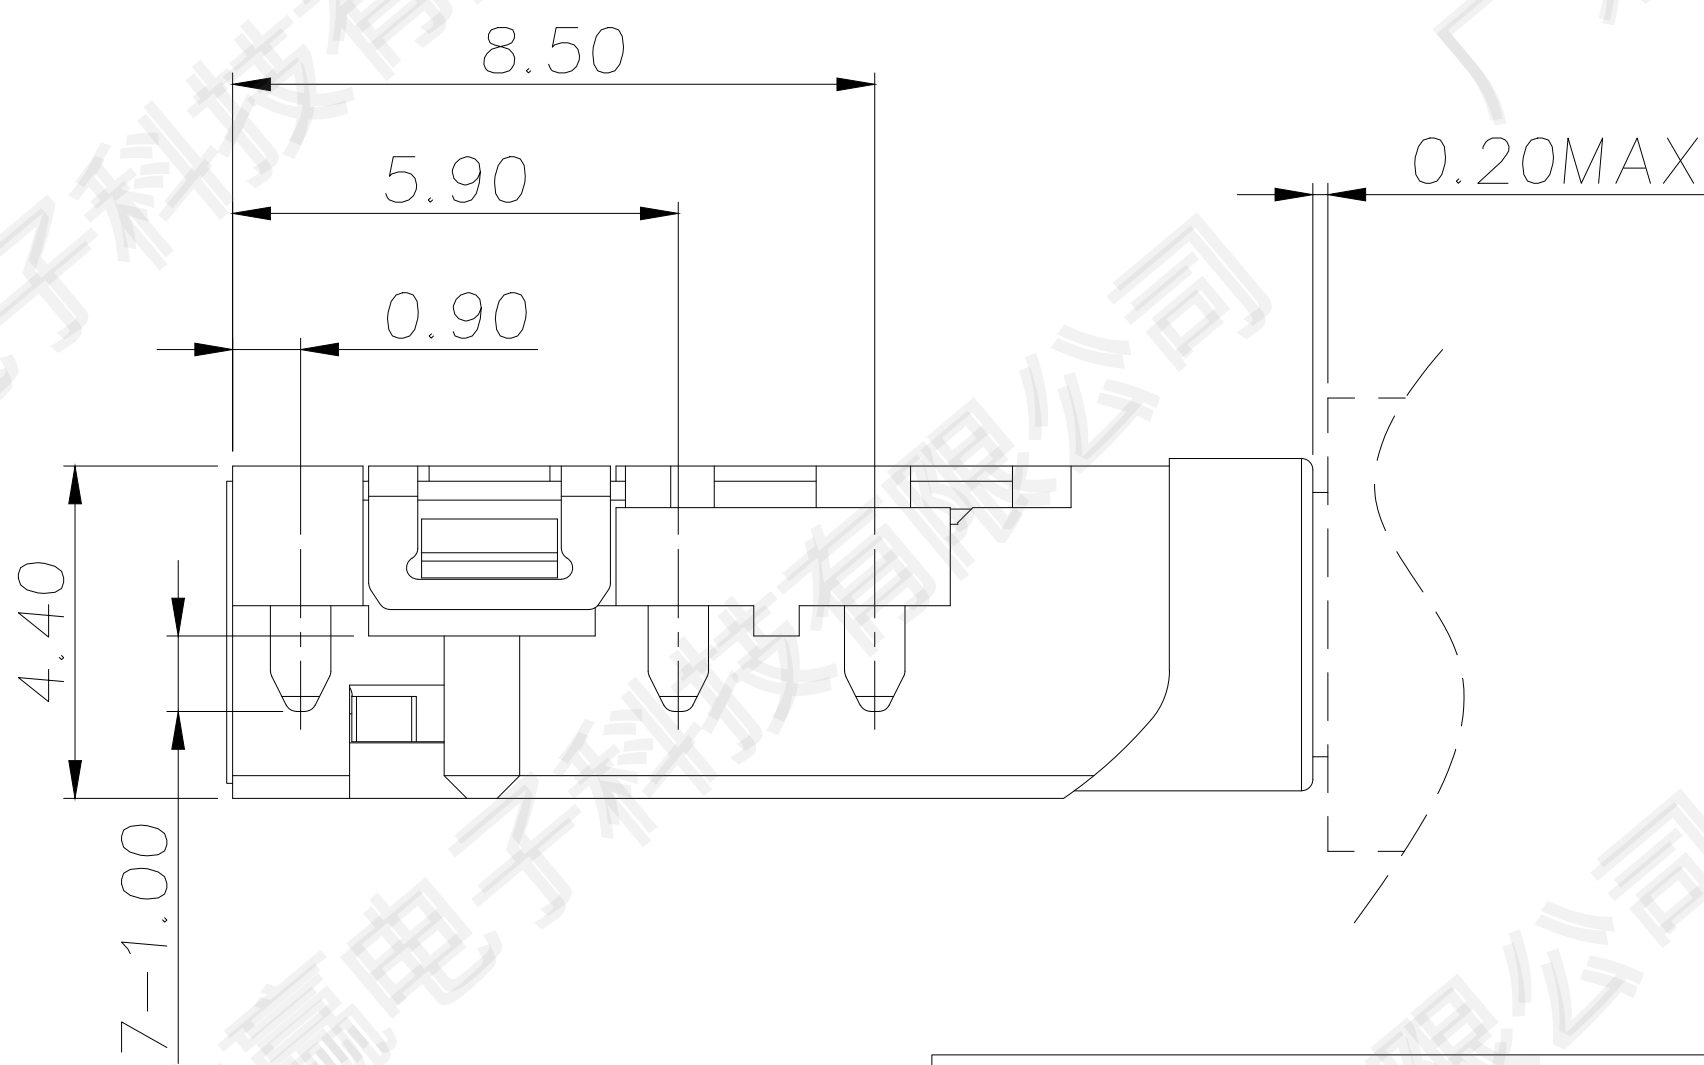
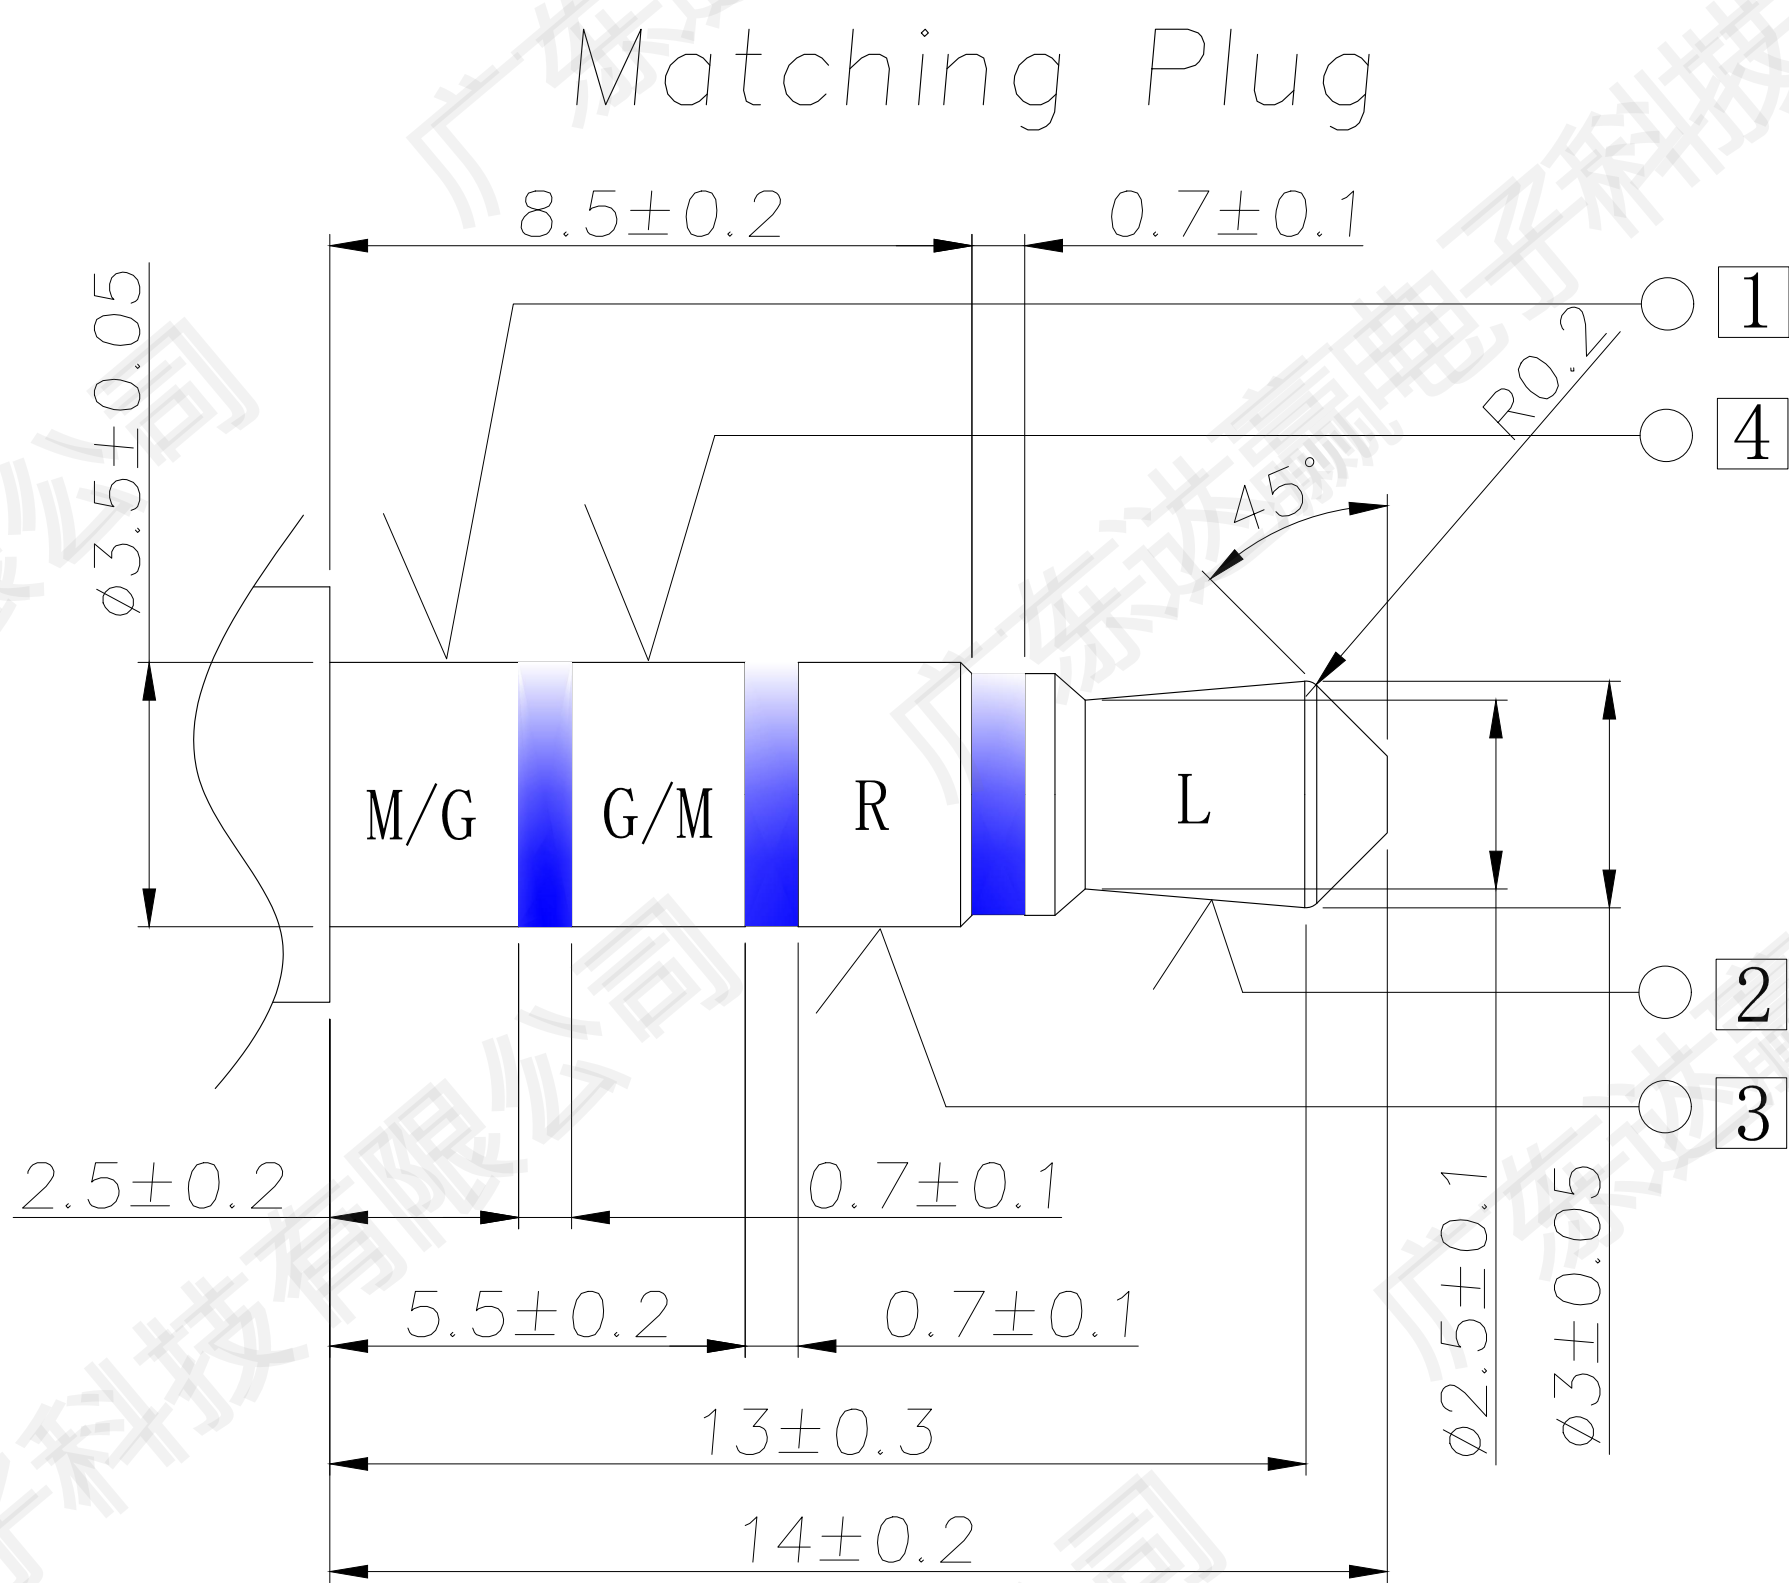
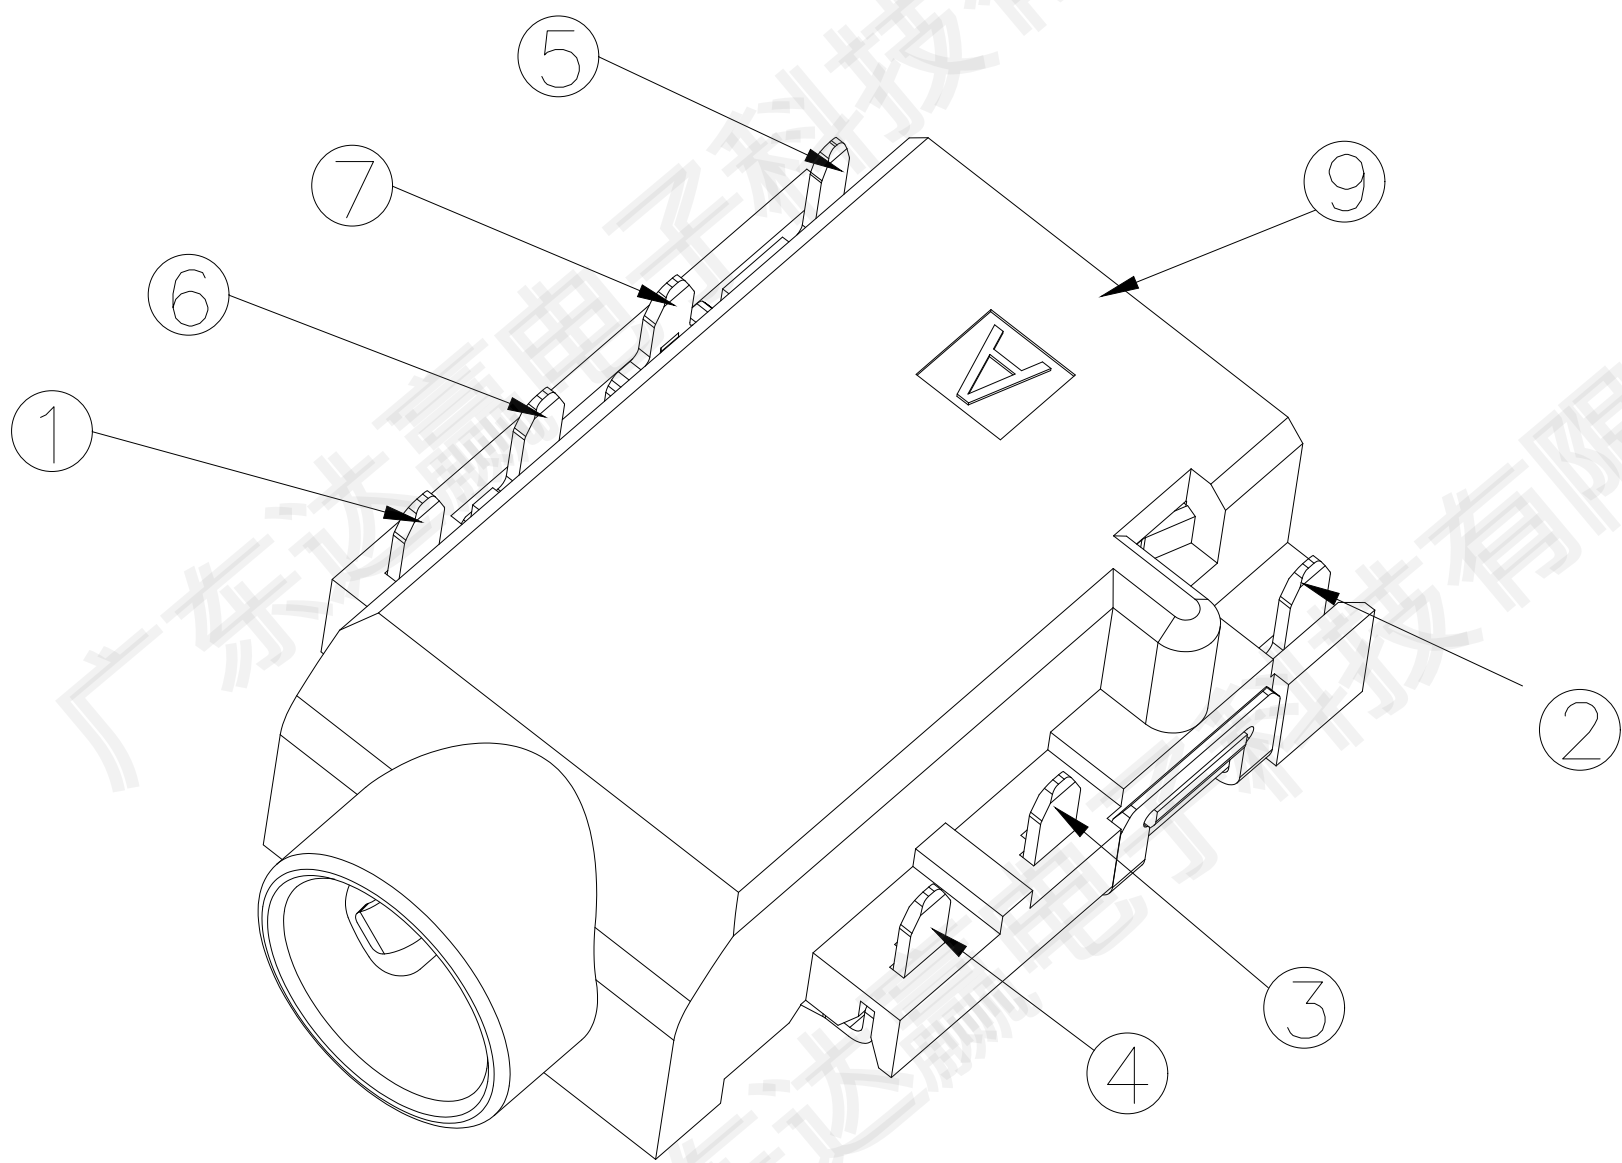





MODEL NO. :
PJ-D3261L-ABK7AS02L-RH
(1) (2)(3) (4)(5)(6)

- (1) Series no.
(2) Schematic type: A
(3) Housing color:
BK7=Black
(4) Terminal plating:
AS02=Plating Tin/Gold flash.
(5) Packing mode:L=Reel packing
(6) Environmental requirements:
RH=RoHS 2.0 + Halogen Free

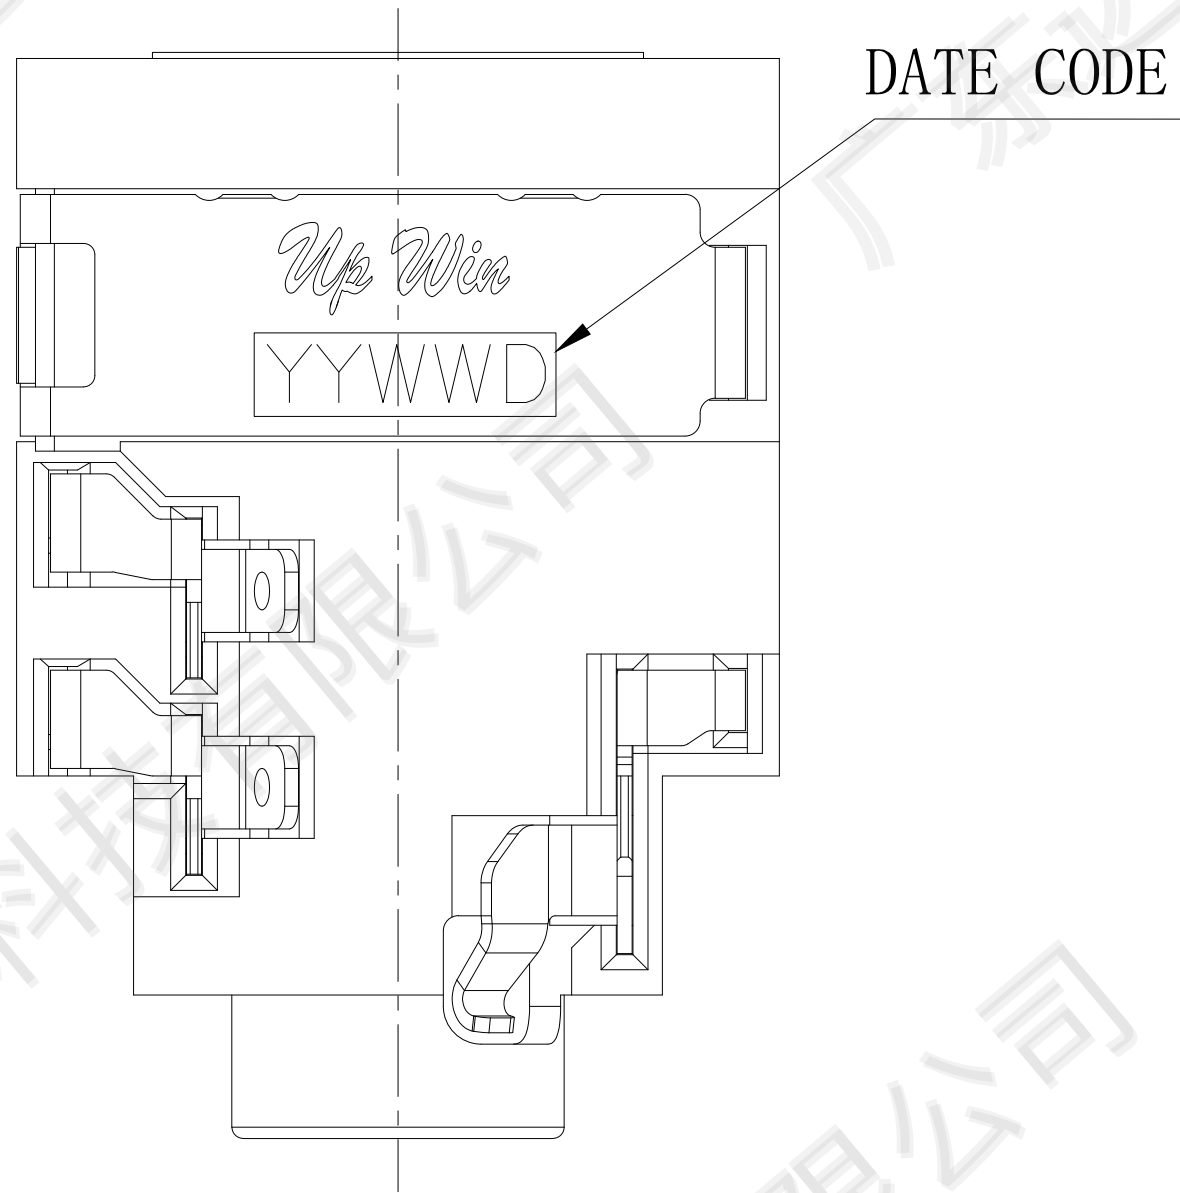

RECOMMENDED P. C. B LAYOUT
TOP VIEW (TOLRANCE: ±0.05)

- SPECIFICATION:
1. Electrical characteristics
- 1-1. Current rating: DC 1.0A max.
- 1-2. Voltage rating: DC 12V.
- 1-3. Contact resistance: 50mΩ max.
- 1-4. Insulation resistance: 100MΩ min. at 500V DC.
- 1-5. Withstanding voltage: 500V AC for 1 minute.
2. Mechanical characteristics
- 2-1. Life test: 5000 cycles min,
- 2-2. Mating force: 3~30N.
- Unmating force: 3~30N.

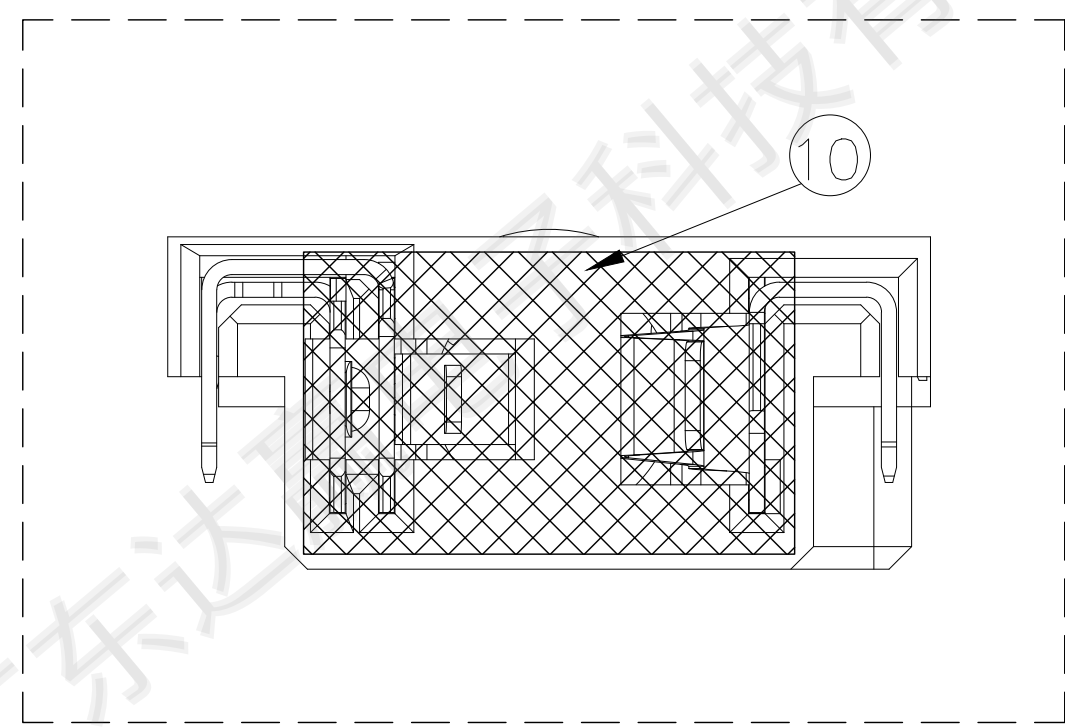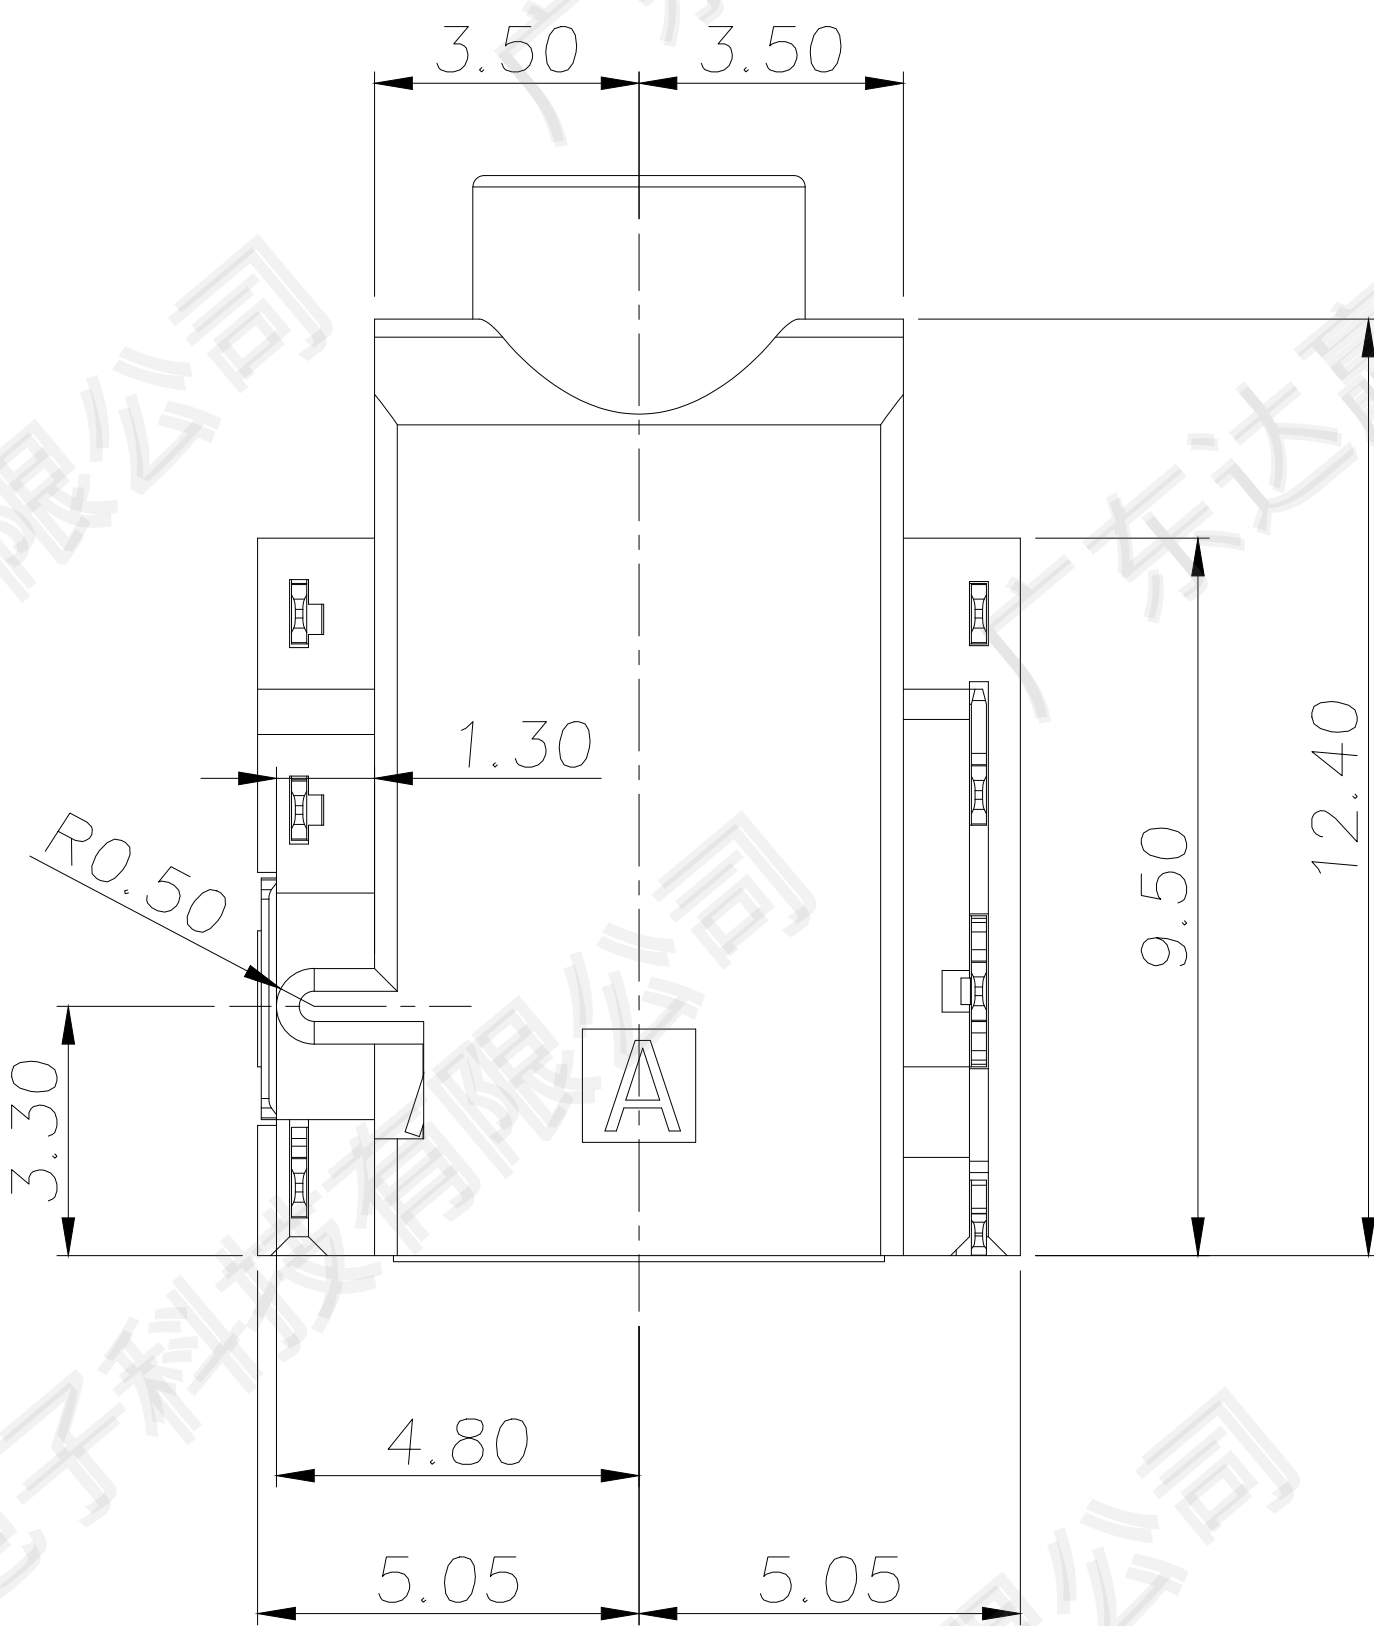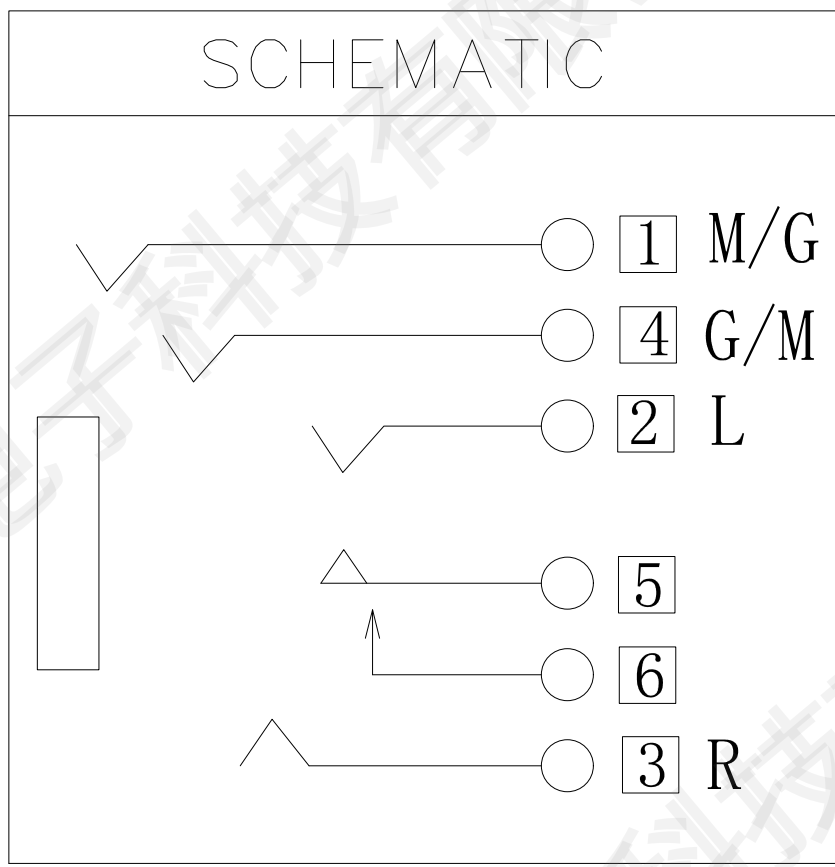

10	Mylar	1	Kapton	Yellow
9	Housing	1	HIGH TEMPERATURE PLASTIC	Black
8	Insulator	1	HIGH TEMPERATURE PLASTIC	Black
5	Transfer Spring ⑤	1	Phosphor bronze, 0.20t	Gold Flash On Contact Area And Solder Tail Area, All over 50u" Nickel Plated
7	shell	1	Phosphor bronze, 0.20t	Plating Ni 50u"
6	Shunt terminal ⑥	1	Phosphor bronze, 0.20t	Gold Flash On Contact Area 80u"matte tin
4	Ring spring ④	1	Phosphor bronze, 0.20t	Plating on Solder Tail
3	Ring spring ③	1	Phosphor bronze, 0.20t	Area, All over 50u"Nickel Plated
2	Tip spring ②	1	Phosphor bronze, 0.20t	
1	Earth spring ①	1	Phosphor bronze, 0.20t	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK



广东达赢电子科技有限公司
Guangdong DaYing Electronic Technology Co., Ltd.

CUSTOMER DRAWING	TITLE:	ø3.5mm PHONE JACK
	MODEL NO.	PJ-D3261L-ABK7AS02L-RH
	FILE NO.	Q/DY. QW-001A-0xxx

						Angle	±2°	DESIGN	罗振强	2018.07.30
						. x	±0.35	CHECK		
						. xx	±0.25	APPROVAL		
						. xxx	±0.10			
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED				