


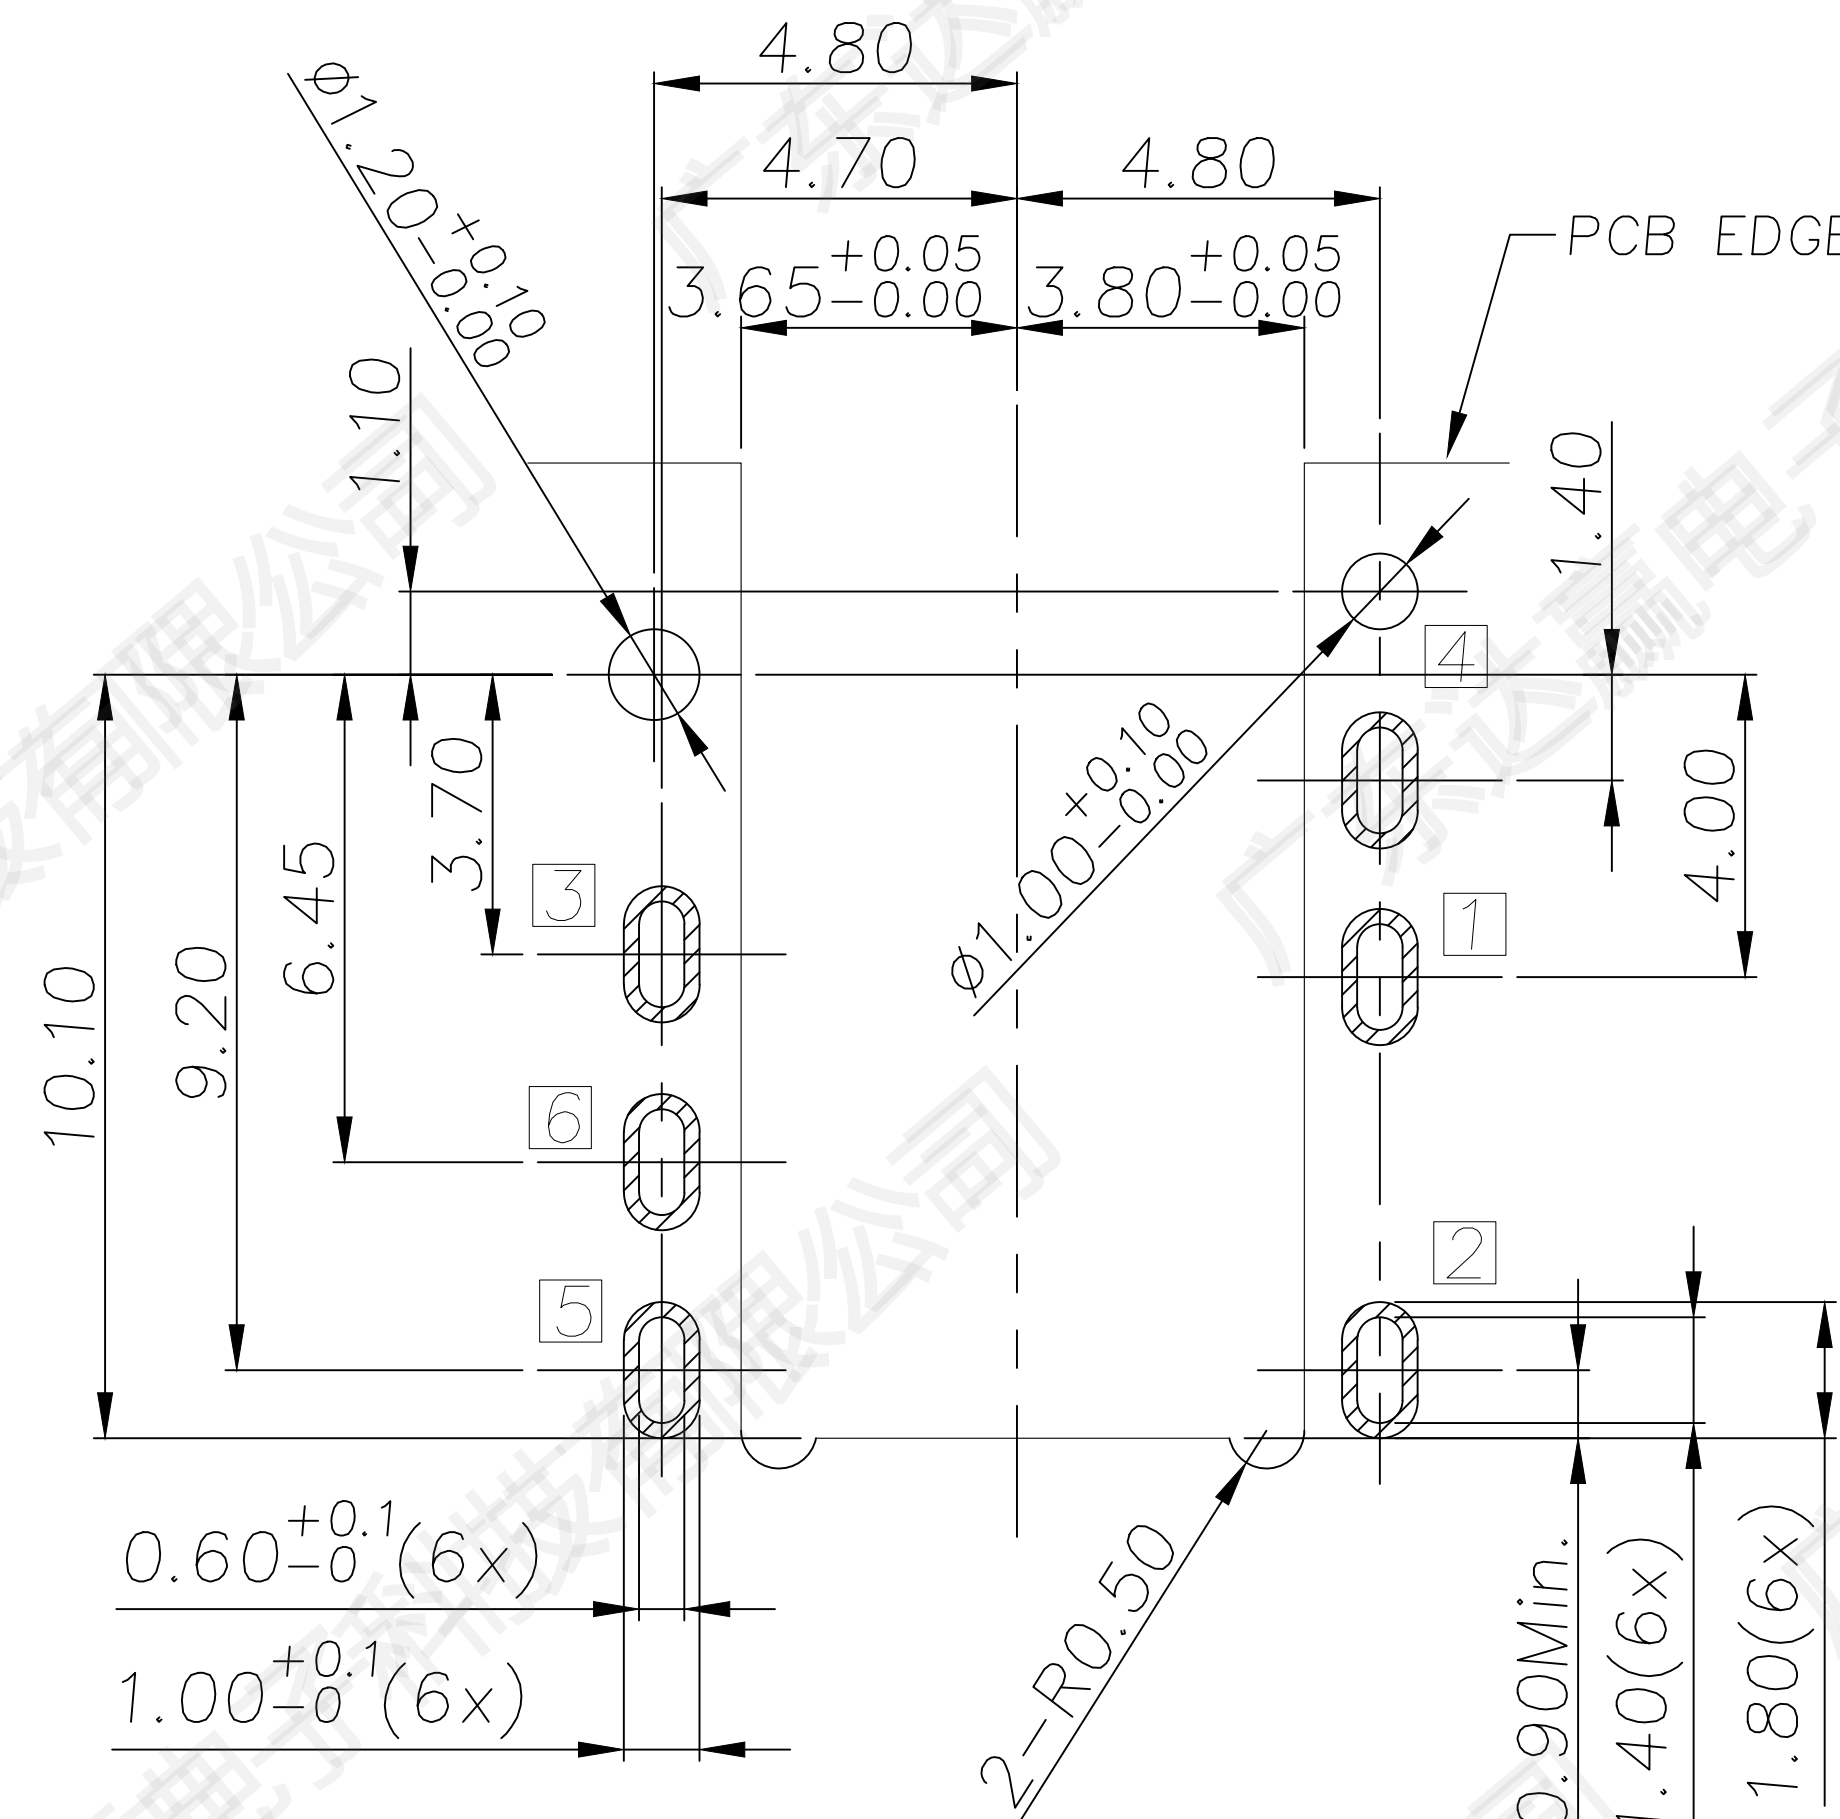
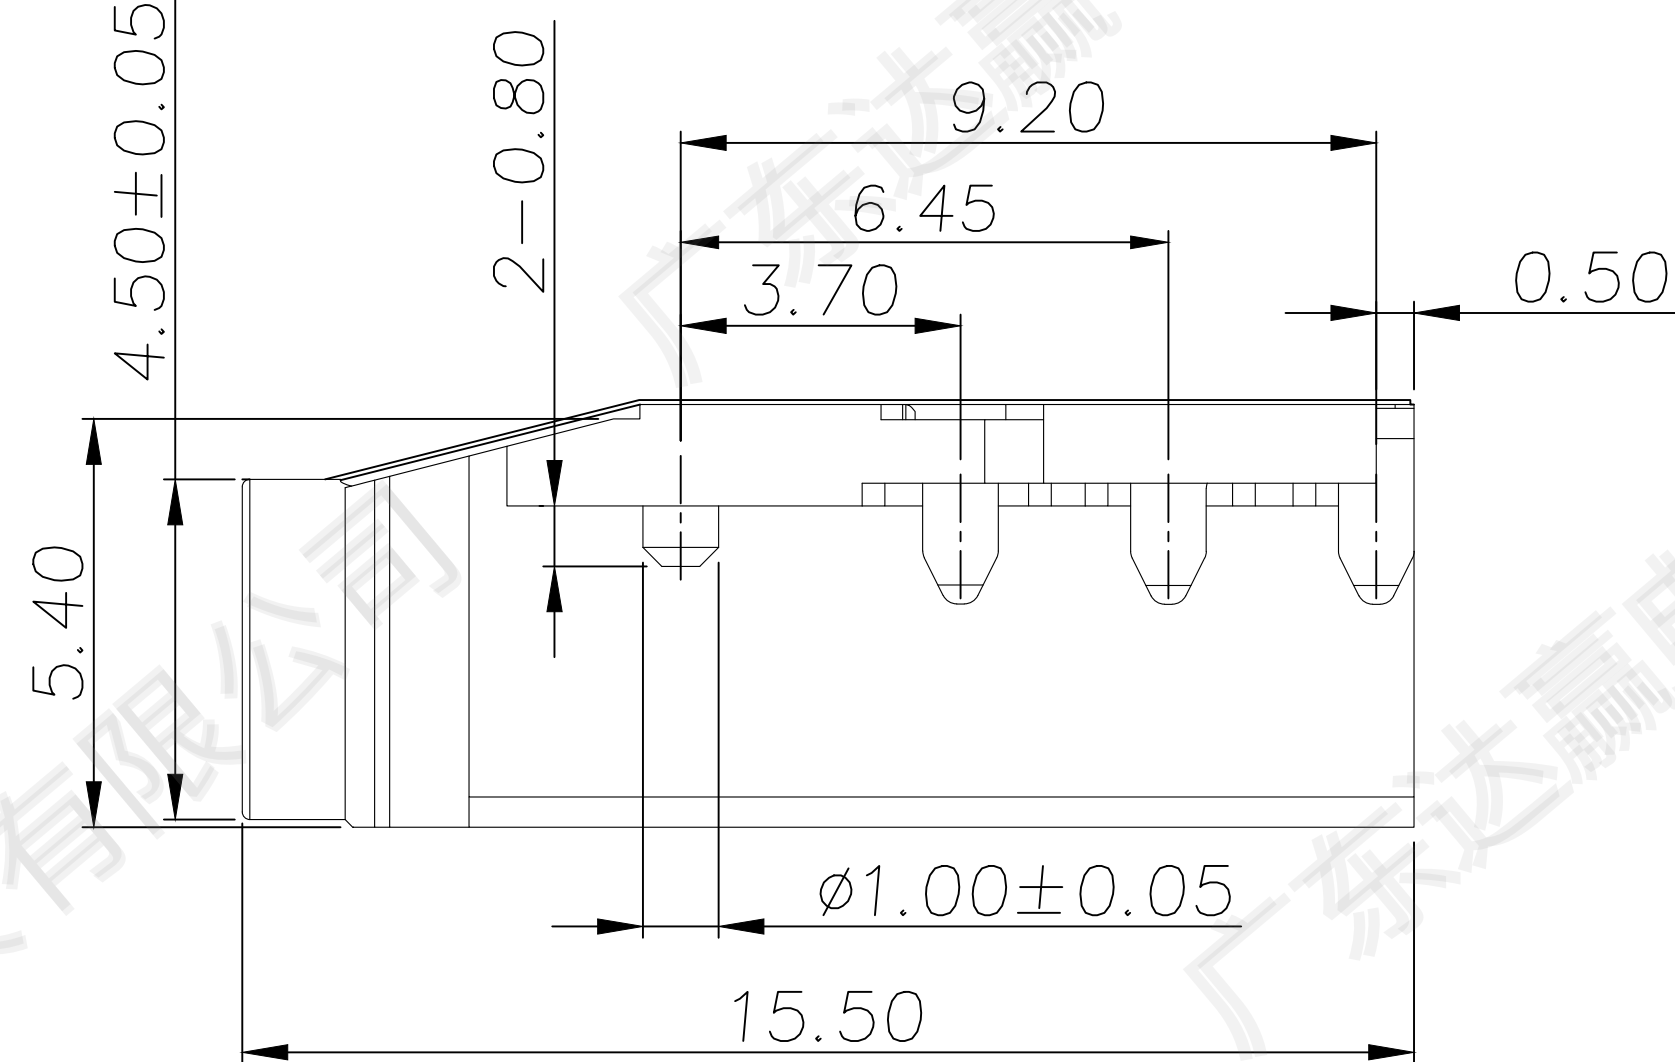
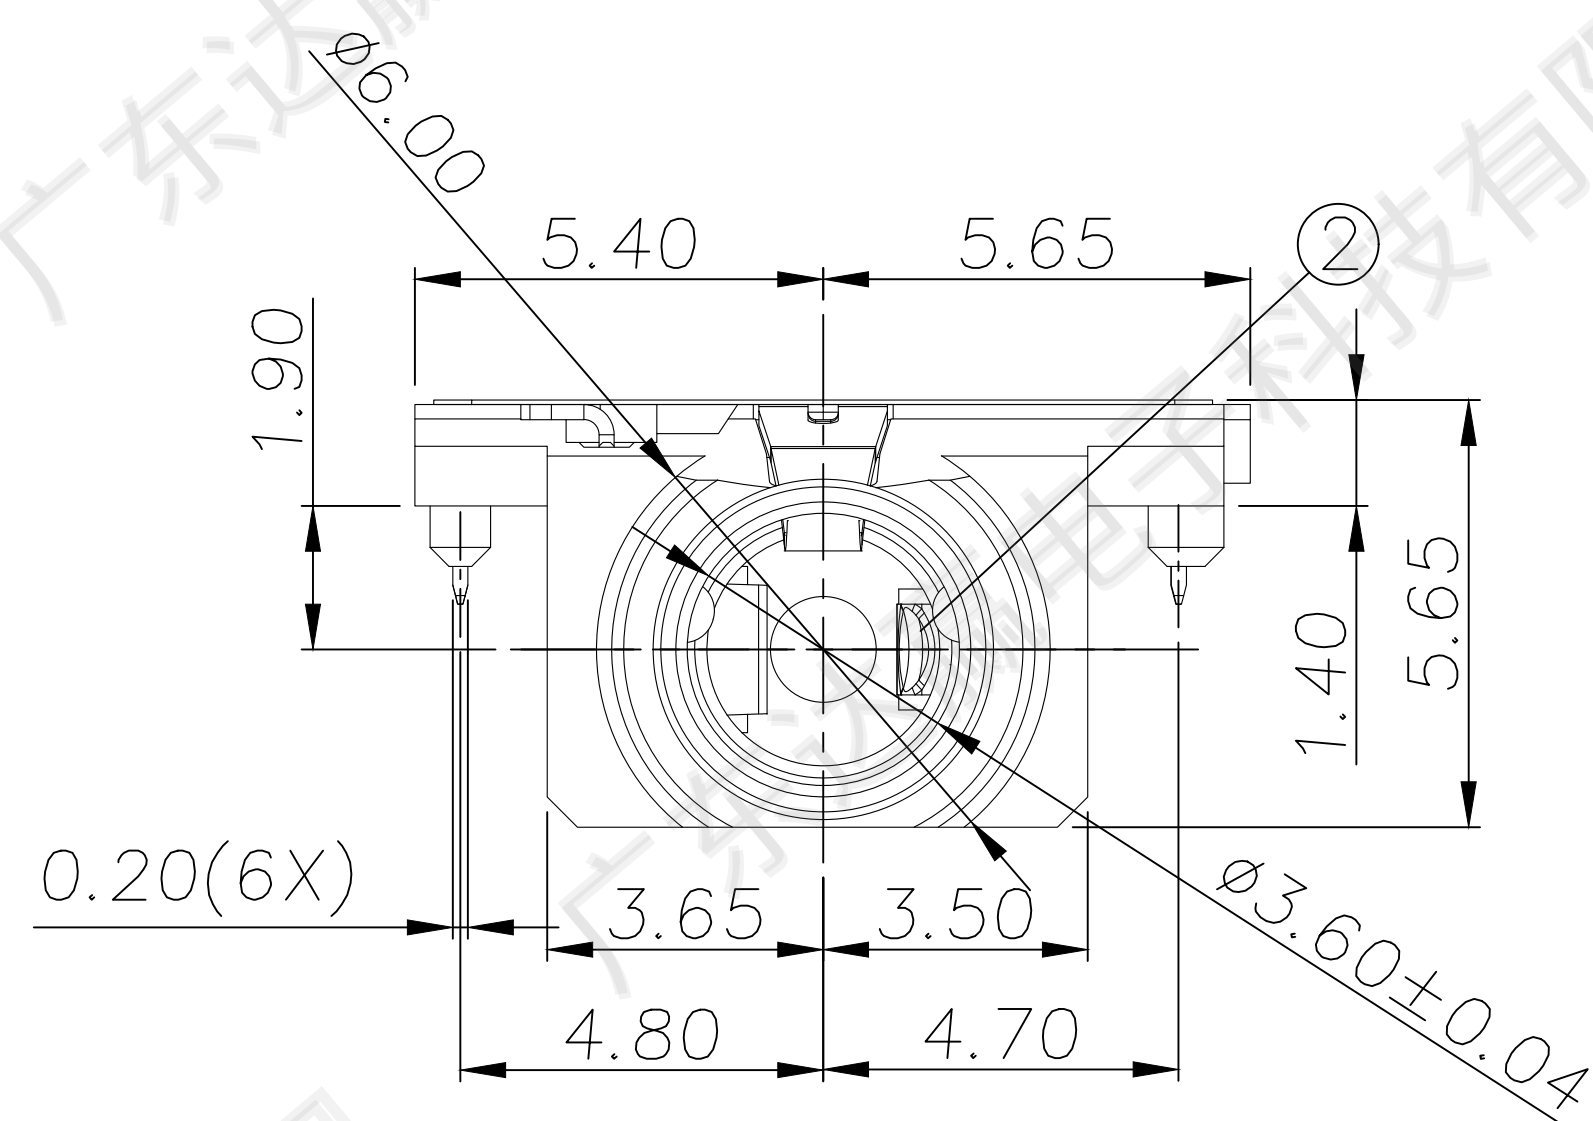
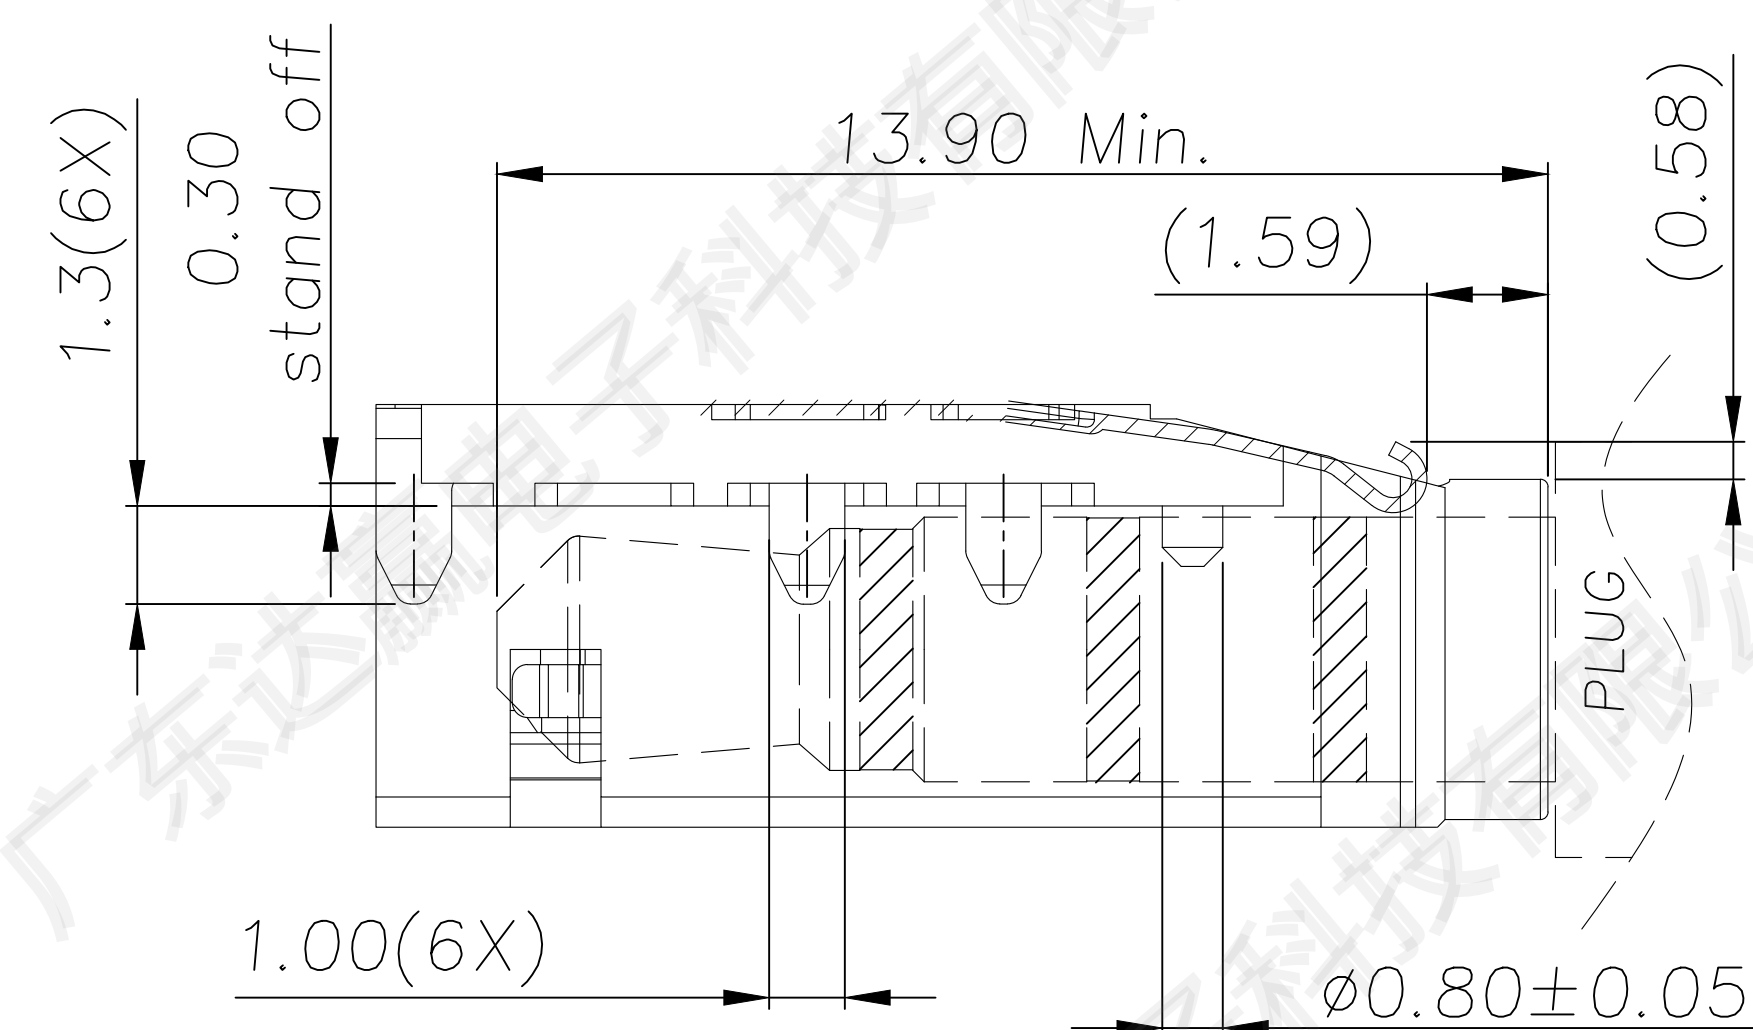
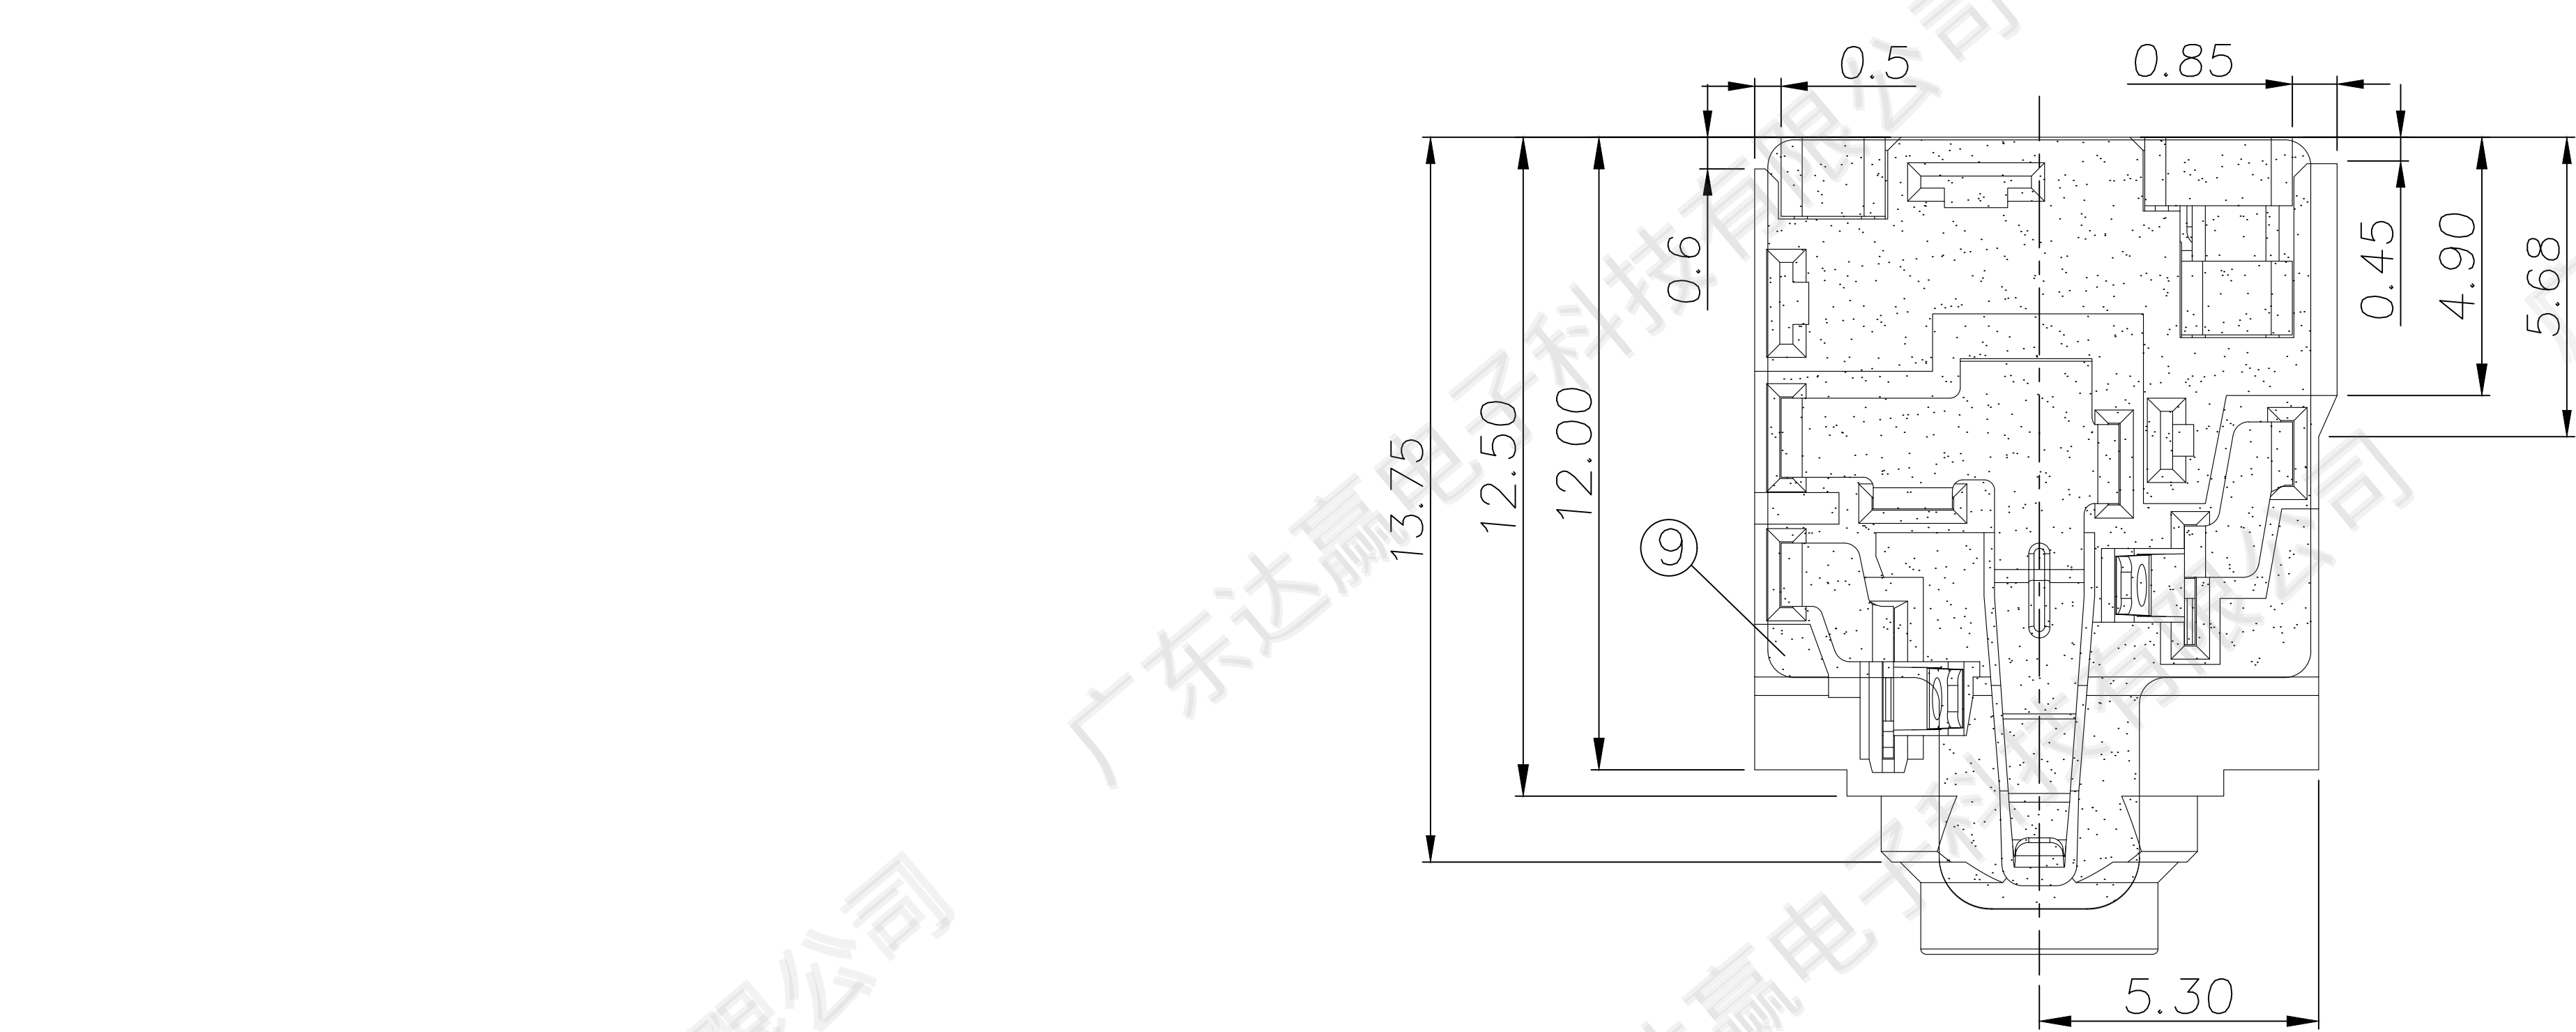


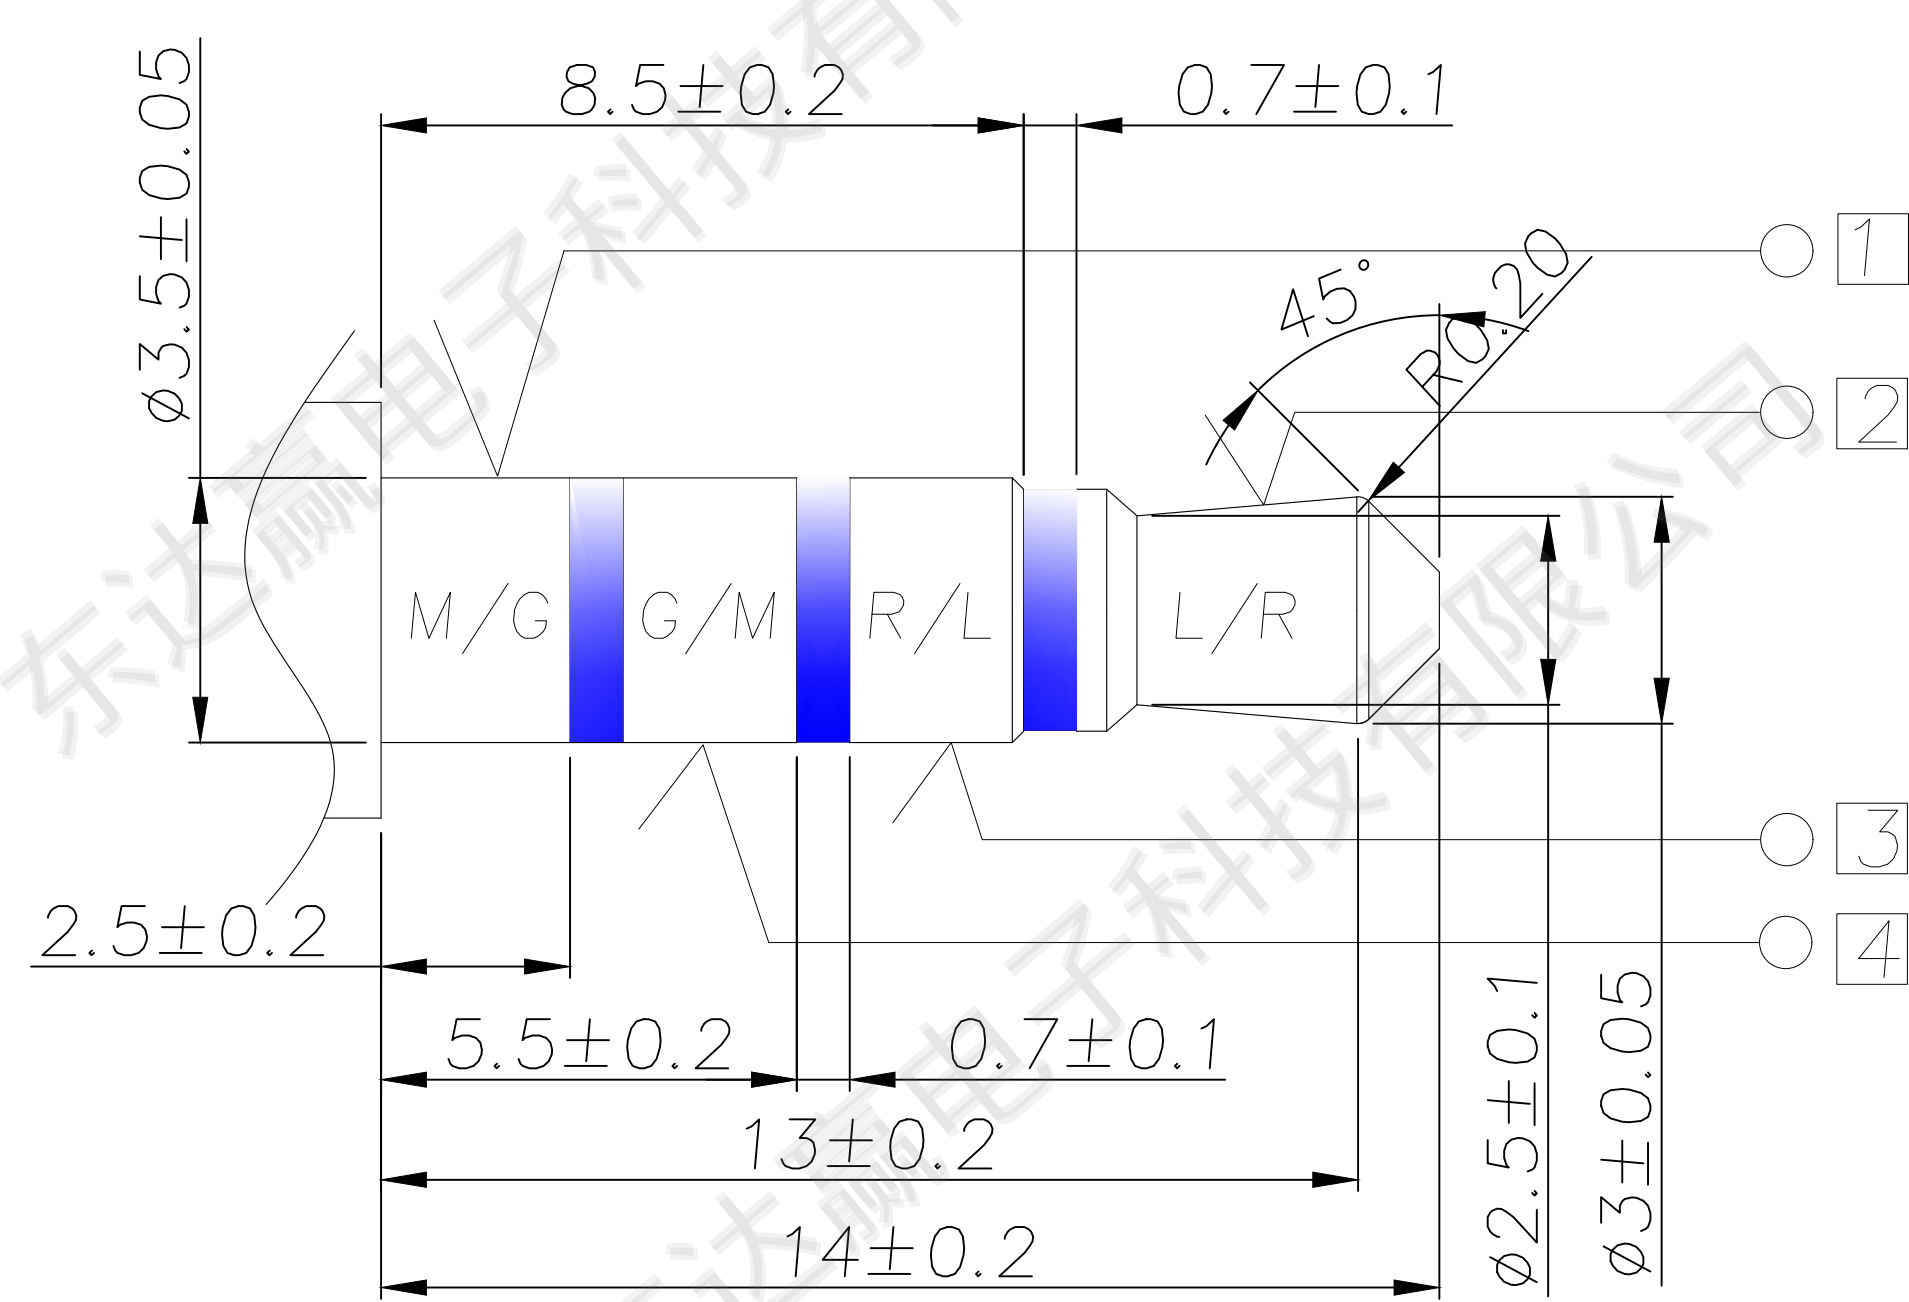

RECOMMENDED P.C.B. LAYOUT
TOP VIEW (TOLRANCE: ±0.05)

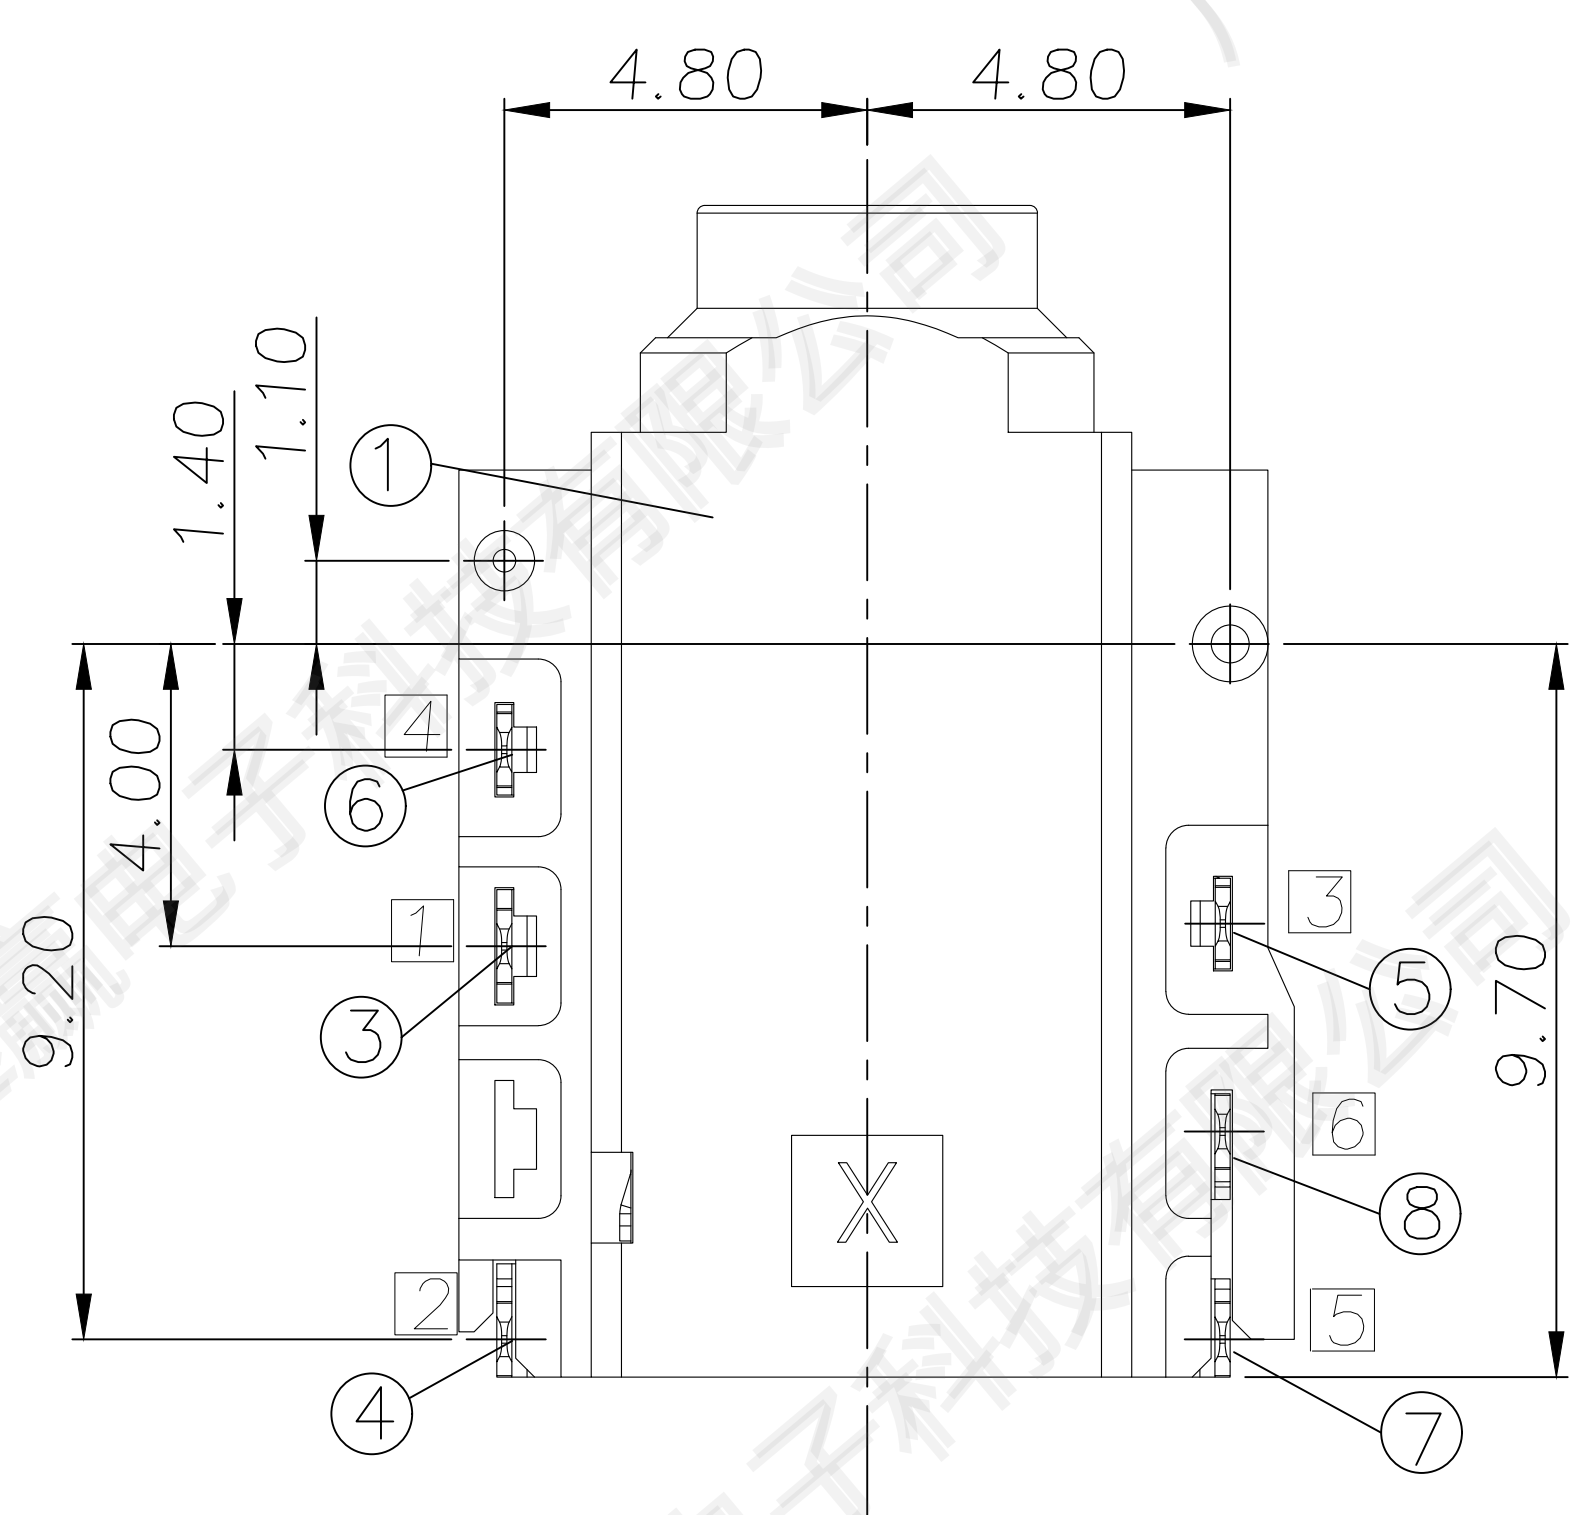

Matching Plug

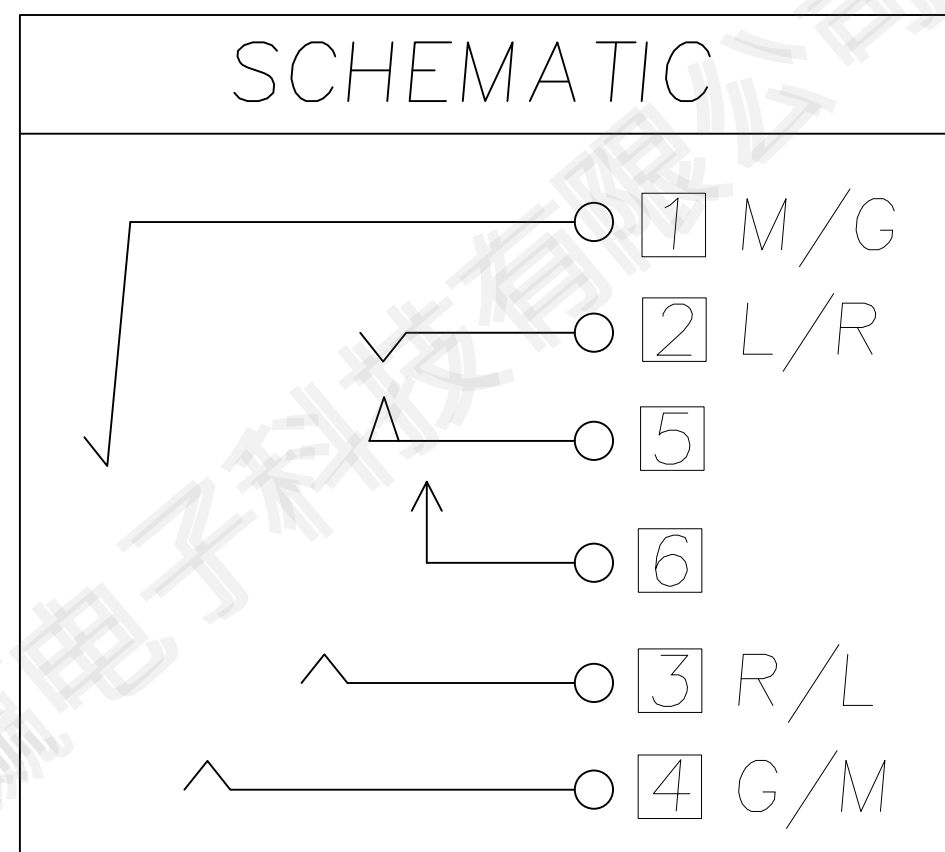

1: Terminal No.
①: Project No.

- MODEL NO.:
PJ-D3266T-A *** AS02 L-RH
(1) (2) (3) (4) (5) (6)
- (1) Series no.
(2) Schematic type: A
(3) Housing material and color:
BK7=PA10T,black
GY2=PA10T,gray(4C)
(4) Terminal plating:
AS02=1#~4#Gold flash on contact
area, Plate Matte tin on
solder tail;5#,6# Silver plating.
(5) Packing mode:L=Reel packing
(6) Environmental requirements:
RH=RoHS2.0 & Halogen Free

- SPECIFICATION:
- 1.Electrical characteristics
1.1.Current rating:DC 1A max.
1.2: Voltage rating:DC 12V.
1.3:Contact resistance: ≤50mΩ(Initial)
After test:≤100mΩ
1.4.Insulation resistance:
100MΩ min. at 500V DC.
1.5.Withstanding voltage:
500V AC for 1 minute.
- 2.Mechanical characteristics
2.1.Life test:5000 cycles min,
2.2.Mating force:8~30N(Initial)
25N Max. After The 2000th
Unmating force:6~18N.
5N Min. After The 2000th

9	Mylar	1	Polyimide film, 0.06t	Yellow
8	Make terminal	6	C5210, 0.20t	Gold Flash on contact and solder tail area, 50u"Nickel underplated.
4	Tip spring	2	C5210, 0.20t	
7	Transfer Spring	5	C5210, 0.20t	
6	Ring spring	4	C5210, 0.20t	Gold Flash on contact area, Plate 120u"Matte tin on solder tail, 50u"Nickel underplated.
5	Ring spring	3	C5210, 0.20t	
3	Earth spring	1	C5210, 0.20t	
2	Separator	1	PA10T UL-94V0	Black
1	Housing	1	PA10T UL-94V0	Black or gray(4C)
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

 广东达赢电子科技有限公司
Guangdong DaYing Electronic Technology Co.,ltd.

					Angle	±2°	DESIGN	罗振强	2020. 04. 25
					. x	±0.38	CHECK		
					. xx	±0.25	APPROVAL		
					. xxx	±0.10			
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	SCALE: 3:1	UNIT:mm	A4

CUSTOMER DRAWING	TITLE:	Ø3.5mm PHONE JACK
	MODEL NO.	PJ-D3266T-AGY2AS02L-RH
	FILE NO.	Q/DY.QW-001A-0XXX